# 3 - Product Portfolio



**PV Transformer** 



**Standard Transformer** 








**Unit Substation Transformer** 



Oil and Gas Power Transformer up to 6.3MVA

## 4 - Product Breakdown

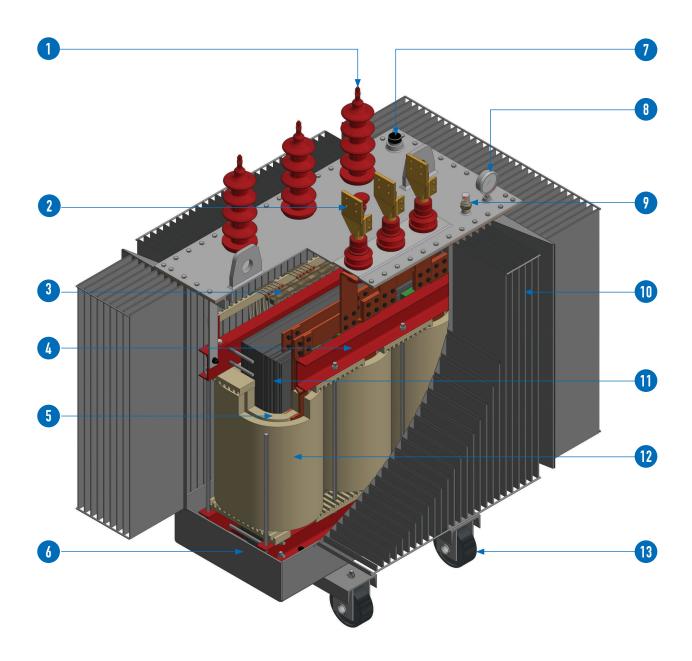

- 1 HV Bushing
- 2 LV Bushing
- 3 No Load Tap Changer
- 4 Core Clamps
- 5 LV Coil
- 6 Transformer Tank

- 7 Pressure Relief Valve
- **8** Top Oil Thermometer
- 9 Oil Level Indicator
- 10 Corrugated Fins
- 11 Core
- 12 HV Coil
- 13 Roller

## 5 - Transformer Classifications

A distribution transformer or service transformer is a transformer that provides the final voltage transformation in the electric power distribution system, stepping down the voltage used in the distribution lines to the level used by the customer.

Whether the transformers are used for infrastructure systems, industry or households, **alfanar** provides the right transformer for every need – from compact distribution transformers to limited power transformers with ratings up to 6300 A.

Transformers can be classified based on many factors like installation or losses which is the most important factor in the transformer.

In any electrical machine, 'loss' can be defined as the difference between input power and output power.



## **A - Standard Losses Transformers**



As per the International Standarads and local Authorities requirments , with a Full cabability to match IEC, SEC and BS 50708-2-1 Tier 1, Tier 2 and Tier 3.

Under those values a standard losses transformer is made to fulfil the customer requirements with a competitive cost and high quality.

#### **Technical Data**

Transformer Type	Three Phas	se, Oil Immersed Distribution Tra (Indoor or Outdoor Installation)	ansformers				
Type of Breathing		Hermetically Sealed /Radiator					
Standard		IEC60076					
Rated Frequency	60Hz						
Connection and Vector Group*		Dyn11					
Ambient Temperature*	Ambient=50	Oil=50	Winding=55				
Winding		CU or ALU					
Type of Cooling	ONAN						
HV Tapping*	Off-ci	cuit tap changer 5 positions ± 2×	2.5 %				


<sup>\*</sup> Subject to change according to customer requirements.


Standard Losses Transformer (Aluminium)


Rated Power kVA	HV(kV)	LV(kV)	No Load Loss W	Load Loss W	Impedance%	Width mm	Depth mm	Height mm	Weight Kg
100	13.8	0.4	300	2150	4	1050	650	1200	750
160	13.8	0.4	440	2600	4	1100	700	1200	850
200	13.8	0.4	480	2950	4	1200	750	1230	950
250	13.8	0.4	550	3650	4	1200	800	1250	1100
300	13.8	0.4	630	4200	4	1350	850	1300	1150
400	13.8	0.4	750	5000	4	1400	850	1350	1500
500	13.8	0.4	850	6000	5	1450	900	1350	1650
630	13.8	0.4	900	8000	5	1550	950	1400	2100
800	13.8	0.4	1250	9000	5	1600	1050	1550	2500
1000	13.8	0.4	1450	12000	6	1650	1100	1550	2800
1250	13.8	0.4	1700	13000	6	1850	1200	1600	3150
1500	13.8	0.4	1850	16500	6	2000	1350	1600	3700
1600	13.8	0.4	2050	18000	6	2100	1400	1700	4400
2000	13.8	0.4	2800	19500	6	2150	1450	1900	4900
2500	13.8	0.4	3000	25500	6	2250	1450	2150	6200
3150	13.8	0.4	3300	30000	7.5	2350	1800	2400	8000
300	33	0.4	630	4200	4	1450	950	1400	1400
500	33	0.4	850	6000	5	1500	1000	1500	1900
630	33	0.4	900	8000	5	1600	1050	1600	2200
1000	33	0.4	1450	12000	6	1800	1150	1700	3000
1250	33	0.4	1700	13000	6	1900	1300	1800	3800
1500	33	0.4	1850	16500	6	2050	1400	2000	4500
1600	33	0.4	2050	18000	6	2150	1450	2050	4700
2000	33	0.4	2800	19500	6	2200	1500	2200	5600
2500	33	0.4	3000	25500	7	2300	1800	2300	7100

Standard Losses Transformer (Copper)

Rated Power kVA	HV(kV)	LV(kV)	No Load Loss W	Load Loss W	Impedance%	Width mm	Depth mm	Height mm	Weight Kg
100	13.8	0.4	300	2150	4	1100	750	1150	750
160	13.8	0.4	440	2600	4	1100	700	1250	900
200	13.8	0.4	480	2950	4	1200	800	1200	1000
250	13.8	0.4	550	3650	4	1200	800	1250	1150
300	13.8	0.4	630	4200	4	1350	850	1250	1200
400	13.8	0.4	750	5000	4	1350	850	1300	1600
500	13.8	0.4	850	6000	5	1400	850	1300	1700
630	13.8	0.4	900	8000	5	1500	950	1350	2200
800	13.8	0.4	1250	9000	5	1600	1050	1550	2500
1000	13.8	0.4	1450	12000	6	1650	1100	1500	2900
1250	13.8	0.4	1700	13000	6	1800	1200	1550	3200
1500	13.8	0.4	1850	16500	6	1900	1300	1600	3750
1600	13.8	0.4	2050	18000	6	2000	1350	1700	4300
2000	13.8	0.4	2800	19500	6	2100	1400	1950	5100
2500	13.8	0.4	3000	25500	6	2200	1500	2050	6550
3150	13.8	0.4	3300	30000	7.5	2350	1800	2350	8100
300	33	0.4	630	4200	4	1400	900	1350	1450
500	33	0.4	850	6000	5	1450	950	1500	1900
630	33	0.4	900	8000	5	1550	1000	1550	2250
1000	33	0.4	1450	12000	6	1750	1150	1600	3100
1250	33	0.4	1700	13000	6	1900	1300	1800	4000
1500	33	0.4	1850	16500	6	2000	1350	1950	4500
1600	33	0.4	2050	18000	6	2100	1400	2000	4800
2000	33	0.4	2800	19500	6	2150	1500	2100	5700
2500	33	0.4	3000	25500	7	2250	1800	2200	7300







# **B - High Efficiency Transformers**



**alfanar** High Efficiency Transformers offer the best ratio between initial cost and operating cost for sensitive applications.

Lowering the energy consumption results in reduced operating costs and less harmful emissions for the customer's operations.

Transformer Type	Three Phas	ee, Oil Immersed Distribution Tr with lossess as per ECO design				
Type of Breathing		Hermetically Sealed /Radiator				
Standard	IEC60076,Losses refer to	commission regulation (EU) No	548, Tier 2 ( 1 July 2021)			
Rated Frequency	60Hz					
Connection and Vector Group*		Dyn11				
Ambient Temperature*	Ambient=50	Oil=50	Winding=55			
Winding		CU or ALU				
Type of Cooling	ONAN					
HV Tapping*	Off-cir	cuit tap changer 5 positions ± 2	<2.5 %			

<sup>\*</sup> Subject to change according to customer requirements.

# **C - Utility Transformers "SEC"**



#### 1- Pad Mounted Transformers

**alfanar** three-phase pad-mounted transformers are compact power centers that can be used for all types of applications.

With a proper design selection, they can be located near or inside buildings for greater flexibility and savings, and are designed to withstand environmental hazards.

The transformers are designed to meet or exceed applicable local and international standards such as IEC and BS standards.

All transformers are manufactured and are produced expressly to meet a customer's exacting specifications.


Transformer Type		Three Phase, Oil	Immersed Distribut	ion Transformers		
Type of Breathing		]	Hermetically Sealed			
Standard		51-SDMS-03 & (	04 (ALU) or 51-SDN	MS-01 & 02 (CU)		
Rated Frequency	60Hz					
Connection and Vector Group			Dyn11			
Ambient Temperature	Ambient=55	Oil=45	Winding=50			
Winding			CU or ALU			
Type of Cooling	ONAN					
HV Tapping		Off-circuit ta	p changer 5 position	as ± 2×2.5 %		


Pad Mounted Transformers SEC (Aluminum)


Rated Power kVA	HV(kV)	LV(kV)	No Load Loss W	Load Loss W	Impedance%	Width mm	Depth mm	Height mm	Weight Kg
300	13.8	0.4	520	3200	4	1500	1300	1400	1600
500	13.8	0.4	750	4700	5	1650	1300	1500	2000
1000	13.8	0.4	1100	9000	6	1800	1400	1700	3400
1500	13.8	0.4	1700	14000	6	2000	1600	2000	4300
300	33	0.4	520	3200	4	1600	1400	1500	1800
500	33	0.4	750	4700	5	1700	1400	1600	2400
1000	33	0.4	1100	9000	6	1950	1600	1800	3600
1500	33	0.4	1700	14000	6	2100	1700	2100	4800

Pad Mounted Transformers SEC (Copper)

F	Rated Power kVA	HV(kV)	LV(kV)	No Load Loss W	Load Loss W	Impedance%	Width mm	Depth mm	Height mm	Weight Kg
	300	13.8	0.4	520	3200	4	1500	1250	1400	1650
	500	13.8	0.4	750	4700	5	1600	1300	1500	2150
	1000	13.8	0.4	1100	9000	6	1750	1450	1700	3600
	1500	13.8	0.4	1700	14000	6	1950	1600	2000	4500
	300	33	0.4	520	3200	4	1450	1400	1500	1850
	500	33	0.4	750	4700	5	1650	1400	1600	2450
	1000	33	0.4	1100	9000	6	1850	1500	1800	3700
	1500	33	0.4	1700	14000	6	2000	1650	2100	5000

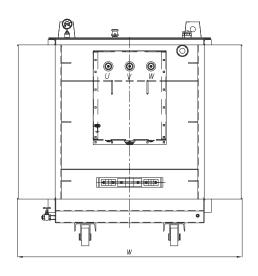

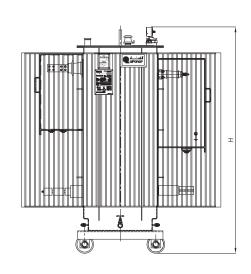

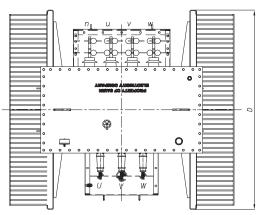

# **C - Utility Transformers "SEC"**



### 2 - Pole Mounted Transformers

Pole mounted transformers are electric utility distribution transformers that are mounted on an electrical service pole (wood or concrete) and are usually at the level of the overhead cables.

These transformers typically service urban and rural residential and commercial loads. Other uses include light industrial and commercial lighting applications.


Transformer Type	Three Phas	e, Oil Immersed Distribution Tra	ansformers				
Type of Breathing		Hermetically Sealed					
Standard	51-SDMS-	03 & 04 (ALU) or 51-SDMS-01	& 02 (CU)				
Rated Frequency	60Hz						
Connection and Vector Group		Dyn11					
Ambient Temperature	Ambient=55	Oil=45	Winding=50				
Winding		CU or ALU					
Type of Cooling		ONAN					
HV Tapping	Off-cir	cuit tap changer 5 positions ± 2×	2.5 %				

Pole Mounted Transformers SEC (Aluminium)

Rated Power kVA	HV(kV)	LV(kV)	No Load Loss W	Load Loss W	Impedance%	Width mm	Depth mm	Height mm	Weight Kg
100	13.8	0.4	250	1500	4	1350	900	1600	650
200	13.8	0.4	380	2200	4	1450	1100	1700	900
300	13.8	0.4	520	3200	4	1450	1100	1700	1250
100	33	0.4	250	1500	4	1350	900	1600	950
200	33	0.4	380	2200	4	1450	1100	1700	1150
300	33	0.4	520	3200	4	1450	1100	1700	1400

Pole Mounted Transformers SEC (Copper)

Rated Power kVA	HV(kV)	LV(kV)	No Load Loss W	Load Loss W	Impedance%	Width mm	Depth mm	Height mm	Weight Kg
100	13.8	0.4	250	1500	4	1350	900	1450	650
200	13.8	0.4	380	2200	4	1450	1100	1700	900
300	13.8	0.4	520	3200	4	1450	1100	1700	1400
100	33	0.4	250	1500	4	1350	900	1450	950
200	33	0.4	380	2200	4	1450	1100	1700	1150
300	33	0.4	520	3200	4	1450	1100	1700	1600

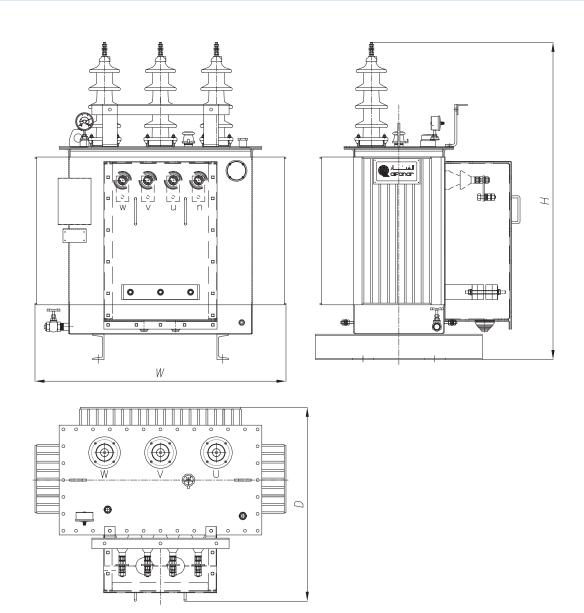

# **C - Utility Transformers "SEC"**



### 3 - Unit Substations

The unit substation transformer is designed for commercial and industrial applications to convert distribution voltages to utilization voltages. They are constructed to interconnect easily with both primary and secondary switchgear.

Unit substations follow the system concept of locating transformers as close as practical to areas of load concentration at utilization voltages to minimize the lengths of secondary distribution cables and buses.

Unit Substations are a compact solution for multiple functions, and can be used in either indoor or outdoor applications.


	General							
Related Specification	56-SDMS-07, 56-SDMS-09 56-SDMS-01, 56-SDMS-03	USS With aluminum transformer & aluminum busbars LVDP USS With copper transformer & copper busbars LVDP						
Ambient Temperature		Up to 55 C						
Outdoor color		RAL 7035 or RAL 7033						
Location of Operation		Outdoor						
Degree of Protection		Up to IP 54						
Electrical Characteristics								
Nominal Unit S/S Rating	kVA	300, 500, 1000, 1500, 2000 kVA						
MV Rating	kV	13.8 kV, 33 kV, 34.5-33kV (dual)						
LV Rating	V	400V, 230V, 400-230V (dual)						
Rated Frequency	Hz	60						
	Transformer	r in the second						
Rated Transformer	kVA	Up to 2000						
Vector Group		Dyn11						
Low Voltage Board								
Main Incomer	A	Up to 4000 A						
Metering Devices		Digital						
Busbar		Tin Plated Aluminum / Copper Busbar						
LV Panel Distribution Units		Branch MCCB/ Main Breaker / Both						


#### Max Dimensions (Aluminium)


Rated Power kVA	HV(kV)	Width mm	Depth mm	Height mm	Weight Kg
500	13.8	1500	1800	2200	2700
1000	13.8	1500	2200	2200	3600
1500	13.8	1800	2400	2200	5200
2000	13.8	2000	2500	2400	7300
500	33	1500	2000	2200	3100
1000	33	1700	2300	2200	4100
1500	33	1900	2400	2200	5700
2000	33	2200	2600	2400	7900

#### Max Dimensions (Copper)

Rated Power kVA	HV(kV)	Width mm	Depth mm	Height mm	Weight Kg
500	13.8	1500	1800	2200	2800
1000	13.8	1500	2000	2200	4100
1500	13.8	1800	2400	2200	5700
2000	13.8	2000	2500	2400	7400

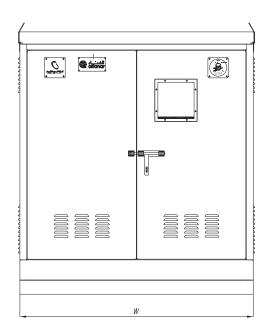

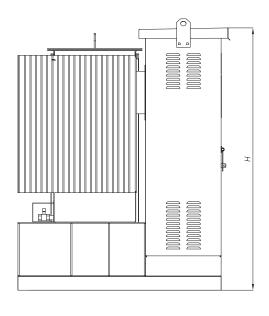

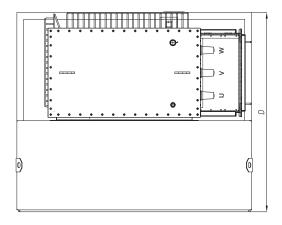



### 1. PV Transformers

PV transformers are the ideal solution for photo voltaic systems. The Technology used along with the appropriate sizing of the core, the framework, and the high quality materials used result in the most suitable product in terms of quality, reliability, efficiency and cost effectiveness.

Transformer Type	Three Phase, Photo Voltic Oil Immersed Distribution Transformers		
Type of Breathing	Hermetically Sealed /Radiator		
Standard	IEC60076		
Rated Frequency	60Hz		
Connection and Vector Group*	Dy11y11		
Ambient Temperature*	Ambient=50 Oil=50 Winding=55		
Winding	CU or ALU		
Type of Cooling	ONAN		
HV Tapping*	Off-circuit tap changer 5 positions $\pm 2 \times 2.5 \%$		

<sup>\*</sup> Subject to change according to customer requirements

### 2 - LV/LV Transformers

LV/LV transformers are generally in the range of hundreds of kVA and are frequently used for:

- Changing the low voltage level of:
  - Auxiliary supplies to control and indication circuits
  - Lighting circuits (230 V created when the primary system is 400 V 3-phase 3-wires)
- Changing the method of earthing for certain loads having a relatively high capacitive current to earth (computer equipment) or resistive leakage current (electric ovens, industrial-heating processes, mass-cooking installations, etc.).



Common Data	Three Phase, Oil Immersed Distribution Transformers (Indoor or Outdoor Installation)			
Standard		-	IEC60076	
Rated Frequency		Hz	60 or 50	
Connection and Vector Group*		-	Dyn11	
Max. Temperature Rise*	Top Oil	°C	50	
Max. Temperature Rise	Average Winding	°C	55	
Type of Cooling		-	ONAN	
Rated Primary Voltage	As per customer's request	kV	Up to 1 KV	
Rated Secondary Voltage	As per customer's request	kV	Up to 1 KV	
Winding		Copper or Aluminum Conductors		
Losses		-	As per Standards	

<sup>\*</sup> Subject to change according to customer requirements

### 3 - MV/MV Transformers

MV/MV transformers are manufactured according to customer request in order to meet the technical features of the plant where they will be installed. **alfanar** provides technical engineering support from the preliminary studies of the transformer to assist the customer in the specification selection.



Common Data	Three Phase, Oil Immersed	Distribution Transformers (Indoor or	Outdoor Installation)
Standard		-	IEC60076
Rated Frequency		Hz	60 or 50
Connection and Vector Group*		-	Dyn11
Max. Temperature Rise*	Top Oil	°C	50
max. Temperature Rise	Average Winding	°C	55
Type of Cooling		-	ONAN
Rated Primary Voltage	As per customer's request	kV	Up to 36 kV
Rated Secondary Voltage	As per customer's request	kV	Up to 36 kV
HV Tapping	Off-circuit tap changer 5 positions	%	± 2x2.5
Winding		-	Copper or Aluminum Conductors
		LI 75 / AC 28 / Um 12	
Primary Insulation Level		LI 95 / AC 38 / Um 17.5	
Filliary Ilisulation Level		LI 125 / AC 50 / Um 24	
		LI 170 / AC 70 / Um 36	
Losses		-	As per Standards

<sup>\*</sup> Subject to change according to customer requirements

### 4 - Dual Voltage Transformers



A dual voltage transformer can be defined as a transformer capable of providing two types of voltages, i.e. if the two separate windings are connected in series, they will provide the sum of voltages supplied to the two coils and if the two windings are connected in parallel, then the net voltage will be decreased. These voltages can be switched within the transformer according to the type of output required by using a dual voltage switch.

Using a transformer which has reconnectable windings greatly reduces costs and saves time as many power applications require a number of voltage levels for different machines, in this case using different types of transformers is not a viable solution.

## • On Low Voltage

Common Data	Three phase, Oil Immerse	ed Distribution Transformers (Indoo	r or Outdoor Installation)
Standard		-	IEC60076
Rated Frequency		Hz	60 or 50
Connection and Vector Group		-	Dyn11
Max. Temperature Rise	Top Oil	°C	50
max. remperature kise	Average Winding	°C	55
Type of Cooling		-	ONAN
Rated Primary Voltage	As per customer's request	kV	Up to 36 kV
Rated Secondary Voltage	As per customer's request	V	500-400 or 480-400 or 400-231, etc*
HV Tapping	Off-circuit tap changer 5 positions	%	± 2x2.5
Winding		-	Copper or Aluminum Conductors
		LI 75 / AC 28 / Um 12	
Duimany Translation Lavel		LI 95 / AC 38 / Um 17.5	
Primary Insulation Level		LI 125 / AC 50 / Um 24	
		LI 170 / AC 70 / Um 36	
Losses		-	As per Standards


<sup>\*</sup> Subject to change according to customer requirements

## • On Medium Voltage

Common Data	Three phase, Oil Immerse	ed Distribution Transformers (Indoo	r or Outdoor Installation)
Standard		-	IEC60076
Rated Frequency		Hz	60 or 50
Connection and Vector Group*		-	Dyn11
May Tomporature Dice*	Top Oil	°C	50
Max. Temperature Rise*	Average Winding	°C	55
Type of Cooling		-	ONAN
Rated Primary Voltage	As per customer's request	kV	22/11 or 13.8-11 or 11-6.6 , etc
Rated Secondary Voltage	As per customer's request	kV	Up to 1 kV
HV Tapping	Off-circuit tap changer 5 positions	%	± 2x2.5
Winding		-	Copper or Aluminum Conductors
		LI 75 / AC 28 / Um 12	
Drimary Inculation Loyal		LI 95 / AC 38 / Um 17.5	
Primary Insulation Level		LI 125 / AC 50 / Um 24	
		LI 170 / AC 70 / Um 36	
Losses		-	As per Standards

<sup>\*</sup> Subject to change according to customer requirements

## 5- Oil Transformers with On-Load Tap Change (OLTC)

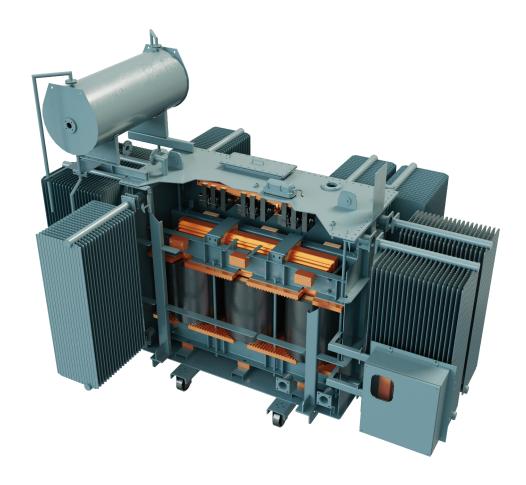

Onload Tap Changer: On-load tap changer (OLTC), also known as On-circuit tap changer (OCTC), is a tap changer in applications where a supply interruption during a tap change is unacceptable, the transformer is often fitted with a more expensive and complex on load tap changing mechanism.

Transformer Type	Three Phase, Oil Immersed Distribution Transformers with On-Load Tap Change (OLTC)		
Type of Breathing	Hermetically Sealed /Radiator		
Standard	IEC60076		
Rated Frequency	60Hz		
Connection and Vector Group*	Dynl1		
Ambient Temperature*	Ambient=50 Oil=50 Winding=55		
Winding	CU or ALU		
Type of Cooling	ONAN		
HV Tapping*	On load-circuit tap changer 17 positions ± 8×1.25 %		

<sup>\*</sup> Subject to change according to customer requirements

### 6- Non-Mineral Oil Transformers (KNAN)



The designation of cooling types of oil distribution transformers depends on the fire point of the oil being used in the transformer. Mineral oils are symbolized with "O" with minimum flash point 135°C as per IEC 60296- Ed. 4, 2012.

Non-mineral oils such as silicone oil, Synthetic Ester (which is also known in the market by the brand "Midel") and Natural Ester (vegetable oils) are designated with "K" since their fire point is above 300°C.

Each letter in KNAN transformer cooling stands for:

- K indicates a beyond 300-degree Celsius fire point
- N denotes Natural
- A is equal to Air
- N Natural
  - 100% fire safety record
  - High fire point >300°C
  - Classified as K-class
  - Renowned resistance to ignition
  - Midel doesn't contribute to the fire
  - Self-extinguishing (Fire extinguished in 7.5 Seconds)
  - No risk of pool fires

#### alfanar High Temperature Transformers

The high temperature oil transformer is characterized by its high dielectric strength, high flash point, wide service temperature range, low vapor pressure, good heat capacity values, low pour point, low viscosity change at extremely high and low temperatures, and inertness to virtually all substrates.



#### **Features**

- High dielectric strength fluid
- High fire point > 300°minimal flammability and high temperature stability
- Low viscosity change, low volatility
- High thermal oxidation resistance
- Chemically inert
- Low toxicity
- Compatible with most existing transformer insulation systems
- Longer service life than conventional transformer oils

## 7- Transformer with hybrid insulation winding



There are three types of hybrid windings transformers.

The first type is a semi hybrid insulation windings transformer, mixed hybrid insulation windings transformer and a full hybrid insulation windings transformer.

Three hybrid winding types share the use of conventional barrier insulation and the use of high-temperature insulation on the windings.

## 6 - Accessories


### **Standard Accessories**

#### 1. Bushing

Transformer bushings connect the network cables to the primary and secondary windings through a metallic cover while electrically isolating them.


The bushing's rating is chosen depending on the voltage, current and applications.




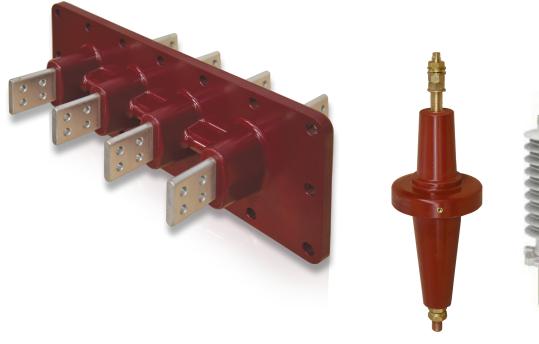



#### a. LV Bushing


Description	Max	Max
Description	Voltage (kV)	Current (A)
DT 1/250	1	250
DT 1/630	1	630
DT 1/1000	1	1000
DT 1 / 2000	1	2000
DT 1/3150	1	3150
DT 3/250	3	250

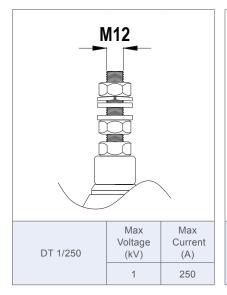


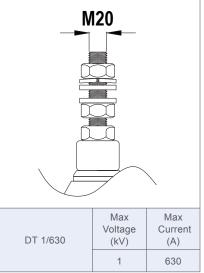

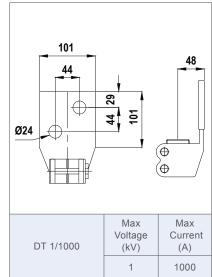

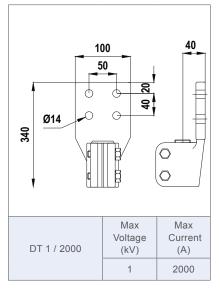

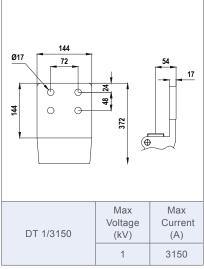


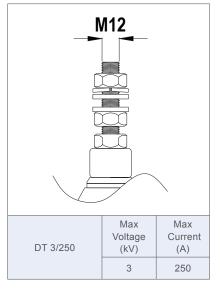



Bushing St. 1 Suitable for Low Voltage Side


#### a. LV Bushing


Description	Max	Max
Description	Voltage (kV)	Current (A)
DT 3/630	3	630
Bar 3.6/850	3	850
Bar 3.6/1600	3	1600
Bar 3.6/2500	3	2500
DT 3/4500	3	4500
DT 3/6300	3	6300

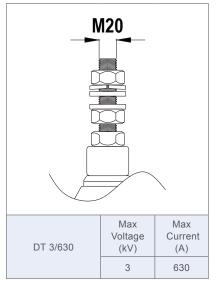


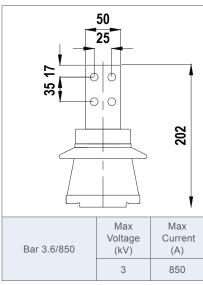

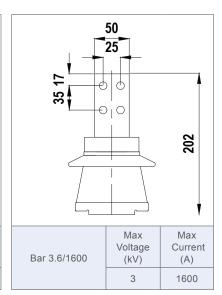

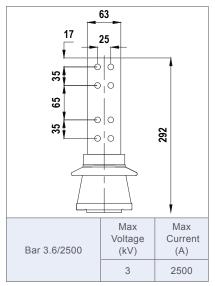

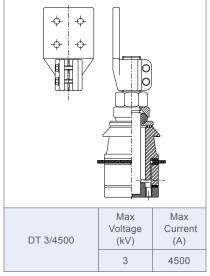


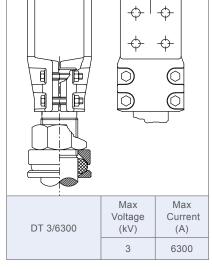



Bushing St. 1 Suitable for Low Voltage Side


#### a. LV Bushing

Description	Max	Max
Description	Voltage (kV)	Current (A)
Monoblock 1.1/800	1	800
Monoblock 1.1/1700	1	1700
Monoblock 1.1/2500	1	2500
Monoblock 1.1/4000	1	4000

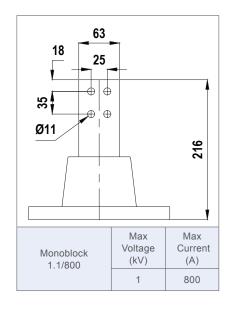

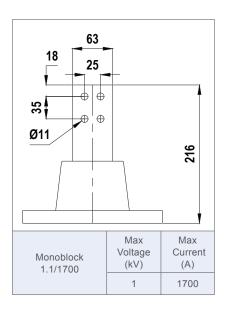


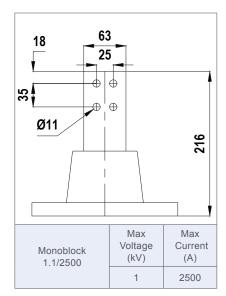

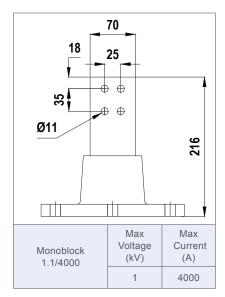


Bushing St. 1 Suitable for Low Voltage Side

#### b. HV Bushing




	DIN Type Bushing		
Description	Max Voltage (kV)	Max Current (A)	Creepage (mm)
DT 20 NF/250 (440)	20	250	440
DT 30 NF/250(600)	30	250	600
30 / 250 - (1320)	30	250	1320
30 / 250 - (1650)	30	250	1650




Heat Shrinkable Bushing				
Description	Max Voltage (kV)	Max Current (A)	Creepage (mm)	
SH-17.5KV /250A-NI	17.5	250	170	
SH-36 KV /250A	36	250	450	

Shrinkable Material NOT in **alfanar** Scope of Supply



	Plugin Bushing *		
Description	Max Voltage (kV)	Max Current (A)	Creepage (mm)
PL 24/250	24	250	N.A.

Suitable Elbow Connector NOT in **alfanar** Scope of Supply MAX. Cable Size 120 mm.



Plugin Bushing *							
Description	Max Voltage (kV)	Max Current (A)	Creepage				
PL 36/630	36	630	N.A.				

Suitable Elbow Connector NOT in **alfanar** Scope of Supply MAX. Cable Size 300 mm.

Bushing St.2 Suitable for High Voltage Side

<sup>\*</sup> For plugin bushing, suitable elbow connector to be used for cable connection.

Po	lymer Type Bushin	g	
Description	Max Voltage (kV)	Max Current (A)	Creepage (mm)
24 kV/250 A	24	250	552
36 kV/250 A	36	250	1320



#### 2. Cable Box

Cable boxes are enclosures for the transformer terminals. They provide protection from hazardous access to terminals, and protect the terminals from water, dust and mechanical impacts up to different degrees.

Protection degrees are described in IEC 60529. The cable box can be either top or side accessible depending on customer requirements.

The degree of protection which **alfanar** offers is IP 54 according to IEC 60529.



#### 3. Oil Level Indicator

Transformers can be equipped with an oil level indicator on the conservator, on the cover or on the side, depending on the design.

Magnetic and prismatic types of oil level indicators are available.



#### 4. Thermometer

The dial type thermometer indicates the maximum highest oil temperature reached during a certain period.

Two contacts are optional to provide an electrical signal, the first is for an alarm and the second for tripping.



#### 5. Pressure Relief Valve

Hermetically sealed transformers can be equipped with a pressure relief device, preset to 0.3bar/0.43bar.

When a pressure exceeding 0.3bar/0.43 bar occurs inside the transformer, the pressure relief valve opens to evacuate the overpressure.

#### 6. Earthing Terminal on Tank

Two earthing points are integrated in each tank, stainless stud, stainless flag with 12mm hole and stainless threaded M10 terminal are the available earthing point types.





#### 7. Drain Valve

The drain valve is used to drain or sample the transformer oil from the transformer tank. These valves are fitted to the transformer tank by welding the pipe of the valve to the tank. These valves are 100% tested to ensure no leakages.





#### 8. Tap Changer

The network voltage is usually not stable and varies between different locations. To keep the secondary voltage at a nominal value, a linear tap changer is used.

The transformer by default comes with 5 position and steps  $2x\pm2.5$ .

Other types of tap changers and number of positions are available upon request. The different taps are indicated on the rating plate. The tap changer is off-circuit operated.

#### 9. Lifting Lugs

Lifting lugs are used for untanking and lifting. 2 lugs are supplied for units weighing up to 3.5 tons, 4 lugs for heavier units.



### **Optional Accessories**



#### 1. DMCR Relay

A DMCR relay is a multifunctional device. It indicates the temperature and oil level and is equipped with electrical contacts for:

- Gas formation
- Pressure excess
- 2 Temperature levels: alarm and trip

#### 2. Oil Conservator

A cylindrical tank mounted on the supporting structure on the roof of the transformer (main tank). The main function of the oil conservator is to provide adequate space for expansion of oil inside the transformer for a breathing type tank transformer.





#### 3. Buchholz Relay

The Buchholz Relay is used in conjunction with the conservator. Oil leakages, gas formations, and quick oil flow to the conservator are internal faults detected by the Buchholz Relay. Dry contacts are provided to signal these alarms.

#### 4. Air Breather

The air breather is installed on the oil conservator. During normal operation the oil temperature changes resulting in an oil volume change, generating a bi-directional air flow from and to the conservator. The air breather contains silica gel which absorbs the air moisture. On delivery, the silica gel is pink, and becomes colorless when moisturized. Silica gel can be recycled by heating to 120 degrees until the color turns back to pink.





#### 5. Roller

Bi-directional rollers are used for ground mounted units: diameter 125mm for ratings up to 630 kVA, diameter 150/200 mm for higher ratings.

#### 6. Winding Temperature Indicator

This device measures the LV and HV winding temperature. A winding temperature indicator or WTI is also used as protection for the transformer.



# 7 - Package and Unit Substations

### **Design and Structure**

**alfanar** Package and Unit Substations are completely self-contained solutions for power distribution that include outdoor duty enclosure, medium voltage switchgear, distribution transformer, low voltage panel, and accessories such as power factor improvement equipment, control and protection equipment, all providing a cost effective and efficient total installation. It can be manufactured as a lighting substation (LSS), or Step Down/Step up substations, MV/MV, MV/LV, LV/:V

The solution packages are built in accordance to IEC Standards and Saudi Electricity Company (SEC) specifications, where the distinguished design provides the customer with a high level of flexibility to cover a wide range of applications.

The construction of the unit substation is almost the same as the package substation but without the MV side.



## **MV Side (Ring Main Unit)**

Each package substation contains the MV part which is in most cases the Ring Main Unit, known as the (RMU). **alfanar** has designed its own RMU under the name of SFA-RM.

SFA-RMs are designed for the supply of sustainable energy and protecting electrical equipment in secondary distribution networks up to 36kV.



SFA-RM units are the best solution for indoor/outdoor distribution substations. With their compact design they suit various network applications such as transformer substations, wind power plants, industrial zones.



The SFA-RM SF6 gas insulated units offer the following features:

- Compact design CESI type tested
- Switching units sealed in a SF6 gas filled stainless steel tank
- High level of operator safety and operating reliability
- Embedded cable testing compartment. Easy and safe cable testing without cable connection removal
- High quality tank welding, leakage rate of less than 0.1% per year
- Maintenance free unit with a life expectation of over 30 years
- Smart interlocking padlocking system for maximum operator safety
- Different feeder combinations with switch disconnector and vacuum circuit breaker
- Compatible with SCADA systems for remote control and monitoring
- Motorized options for circuit breakers and switches
- High resistance to pollution and humidity


# **Technical Data Sheet**

Rated Voltage		Up to 36kV					
Busbar Rating		Up to 630 A					
		·					
Rated Frequenc		50 / 60 Hz					
Rated Nominal	Current for Ring Switch	Up to 630A					
Rated Nominal	Current for Tee-off Feeder	200/400 / 630 A					
Rated Short Tin	ne Withstand Current	21 KA / 1 Sec 21 KA / 3 Sec					
Internal Arc Ca	lcification	A (FLR) 21 KA / 1 Sec ( indoor & Outdoor)					
Rated Filling SF	6 Gas Level for Insulation	1.2 bar (absolute)					
Minimum Funct	ional SF6 Gas Level	1.1 bar (absolute)					
Relative Humid	ity	100%					
IP Class (Gas T	ank / Indoor / Outdoor)	IP 67/ IP41 / IP54					
Rated Lightning Impulse Withstand Voltage		95 kV-peak					
Rated Power Frequency Withstand Voltage		38 kV-rms					
Applied Standard		IEC 62271-200					
	Type of Switch-Disconnector	General purpose, three-positioned (OPEN-CLOSED-EARTHED)					
	Electrical Endurance Switch-Disconnector/Earthing Switch	E3 / E0					
Ring Switch	Mechanical Endurance	M1					
Feeder (S)	Nominal Current	Up to 630 A					
	Short Circuit Making Current	21 kA (also valid for earthing switch) 54.6kA Peak					
	Applied Standard	IEC 62271-103/102					
	Type of Breaker	Vacuum					
	Electrical Endurance	E3					
TEE-OFF	Mechanical Endurance	M1					
Feeder (B)	Nominal Current	Up to 630 A					
	Short Circuit Breaking Current	21 kA					
	Applied Standard	IEC 62271-100					

## **Transformer**

The transformer is the main part of every package and unit substation, where the type is changeable based on customer specification and application:

- Oil immersed conservator type or hermetically sealed or dry type transformers can be installed
- Transformer bushings can be located on top or side of transformer as per customer needs
- Wide range of transformer capacities up to 3150 kVA
- Typical kVA's: 75, 100, 150, 160, 200, 250, 300, 315, 400, 500, 630, 750, 800, 1000, 1200, 1250, 1500, 1600, 2000, 2500, 3000, 3150
- **alfanar** package and unit substations are designed for simple and easy transformer installation onsite or integrated into the PSS in the factory

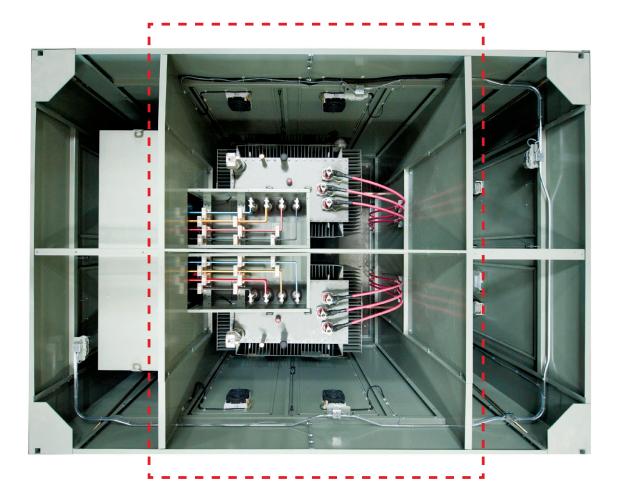

# **Low Voltage Panel**

LV Panel is manufactured for safe distribution and efficient control of electricity in residential, commercial and industrial premises.

**alfanar** LV products conform to most national and international standards.



- Incoming feeder options can be directly connected with circuit breakers and busbar links
- The LV busbar rating depends on the transformer rating
- Various number and ratings of outgoing feeders depend on transformer size and customer requirements
- Equipment for metering, protection, BMS, SCADA and control is available
- Incoming breaker up to 5000 A (Drawout/Fixed, Manual/Motorized)
- Current transformers
- Outgoing circuit breakers
- Sleeves busbar
- Special requirements-Auto transfer system (ATS), Power factor correction (PFC)

# **PSS Technical Features**

	General						
Ambient Temperature	Normal Operating	Customer requirement					
Outdoor Color		RAL 7033, RAL7035					
Location of Operation		Outdoor					
Ventilation Type		Natural					
Degree of Protection	MV and LV	Up to IP 54					
begree or Protection	Transformer	IP 23					
	Electrical Characteristics						
Rated Voltage (kV)		11, 13.8, 17.5, 24, 36 *					
Rated Frequency (Hz)		50, 60					
Ring Main Unit							
Load Break Switch (A)		400, 630					
Transformer Feeder		Circuit Breaker, Switch					
	Transformer						
Rated Transformer Hermetically Sealed		Up to 3150 kVA					
Vector Group		Dyn 11 *					
	Low Voltage Panel						
Main Incomer		Up to 5000 A					
Metering Devices		Digital, Standard					
Busbar	With Sleeves	Tin, Silver Plated					
вмѕ		Can be interfaced with building management system for monitoring and controlling					


## **Standard Ratings and Dimensions**

kVA (13.8)	100-250	300-400	500-630	750-1250	1500-1600	2000-2500	3150
Length (mm)	2962	3200	3518	3518	3718	3877	4200
Width (mm)	1800	2200	2200	2400	2600	2800	3000
Height (mm)	2200	2200	2300	2300	2300	2300	2500
kVA (33)	100-250	300-400	500-630	750-1250	1500-1600	2000-2500	3150
Length (mm)	3200	3518	3518	3518	3718	3877	4200
Width (mm)	2200	2400	2400	2400	2600	2800	3000
Height (mm)	2300	2300	2300	2300	2300	2300	2500

## 8 - Service

To complement its position as a market leader of transformer manufacturing and supply, **alfanar** provides testing and commissioning services.

Our highly qualified and competent commissioning engineers undertake the complete electrical testing and commissioning of transformers and ancillary equipment.

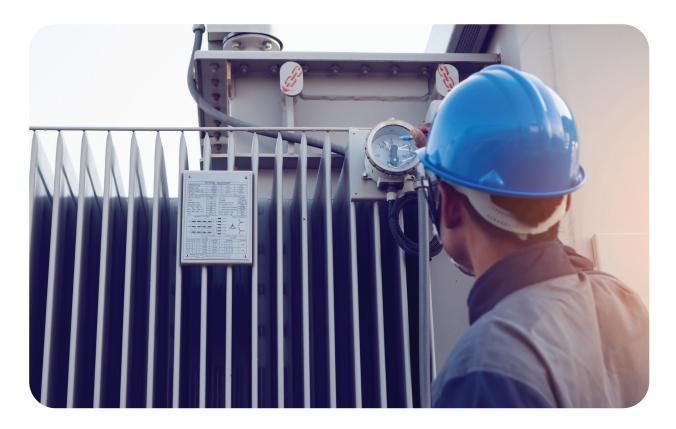

#### This service is split into two groups:

- Dead testing is performed on the circuits when the transformers are de-energized, and from the initial testing of the circuits to outline the insulation resistance of the new circuits, and the continuity for the ring circuits.
- Live testing is performed on the circuits if the result of the dead test has been recorded as unsatisfactory, and once the installation has been put back together following the dead testing.

#### List of tests conducted:

- 1- Visual inspection
- 2- Measurement of insulation resistance
- 3- Measurement of winding resistance
- 4- Measurement of voltage ratio and vector group
- 5- Energizing the transformer

# 9 - Testing

**alfanar** believes that quality means absolute congruity and compliance with customer requirements and international standards.

Therefore, **alfanar** has equipped its testing lab with the most modern testing equipment and instrumentation devices to ensure conformity to the highest level of quality and safety, where every transformer produced by **alfanar** is tested according to IEC Standards.



#### **Routine Tests**

- 1- Measurement of winding resistance
- 2- Measurement of voltage ratio and phase displacement
- 3- Measurement of short circuit impedance and load losses
- 4- Measurement of no-load losses and current
- 5- Dielectric routine tests (separate source AC voltage withstand test and short duration induced over-voltage withstand test)
- 6- Measurement of insulation resistance

#### **Type Tests**

- 1- Temperature rise test according to IEC 60076-2
- 2- Lighting impulse test according to IEC 60076-3

#### **Special Tests**

- 1- Short circuit withstand test (as per IEC 60076-5)
- 2- Measurement of zero-sequence impedance(s) on three-phase transformers
- 3- Determination of sound levels (as per IEC 60076-10)
- 4- Measurement of the harmonics of the no-load current

# **10 – Inquiry Form**

Ref No:													
Custome	er Name :												
Project	:												
CRM sub	o-opportunity :												
Fea	ture of the Transfor	mer											
1-	Installation location	10			Indo	or		Outdo	or		Other		
2-	Winding Material				Сорр	er		Alumir	num				
3-	Reference Standar	rd			I.E.C	. 60076		SEC S	Standard		Export		Other
4-	Installation Type				P.S.S			U.S.S			Pad		Pole
5-	Bushing				Top b	oushing		L.V. Si	de		H.V Side		LV , HV Side
6-	Type of oil sealing				Hear	maticaly		Conse	rvator				
7-	Max. altitude from	sea level of operating	location of transformer		< =	1000		>1000	)				
8-	Parallel operation	required with another	transformer		Yes			No					
9-	Transformer with t	tap change			Yes			No					
10-	LV Cable box				With	out		Side			Тор		Top + Busbar
11-	HV Cable box				With	out		Side			Тор		
Par	ameter of Transforn	ner											
1	Quantity			Unit									
2	Rated power			kVA									
3	Rated Primary Vol	tage at No Load & Co	onnection Of Widing	V					Delat	S	Star		
4	Rated Secondary	Voltage at No Load &	Connection Of Widing	V					Delat	S	Star		
5	Rated Secondary	Voltage at Full Load @	Spcified PF	V									
6	Voltage Sequance					Step Dov	wn		Step Up				
7	Rated frequency					60 HZ	50 Hz						
8	Vector group					Dyn11			Dyn5	Y	nd11		
9	If any another ren	nark, Please specify in	detail										
Opti	ional accessories re	quired											
Use	Standard Accessor	ies ( Oil level indicat	or - Oil thermometer -	Pressi	ıre re	lief valv	Y	es			1	Vo	
	In Case Of No Plea	ase Choose From List	And Add Your Requirm	ent									
	Magnetic Oil	Level Indicator (Side )					Y	es					
	Vertical Oil Le	evel Indicator ( Top )					Y	es					
	Dial Type The	ermomter (Top)					Y	es					
	Dail Type Thermomter(Side)						Y	es					
	Oil Thermomter With 2 Contact (Top)						Y	es					
	Pressure Relief Valve						Y	es					
Roller							Y	es					
	D.M.C.R Rellay						Y	es					
	Thermowall Class 130 ( Scada RTD)												
If any additional Accessories required Please Insert Here													
Des	ign Paramter If Non	Standard											
NO	load Losses	:	Watt				Ambie	nt Tem	пр				С
Loa	d Lossess	:	Watt				Oil Ter	np Ris	e				С
	Voltage Impedance : %						Winding Temp Rise					=	

Notes	