





Weldolet

Double Extrastrong



Dim.	REDUCING SIZE						FULL SIZE		
	Size D (mm)	A (mm)	INCH	(mm)	INCH	WEIGHT KG	D (mm)	INCH	WEIGHT KG
1/2"	21.34	28	1 1/8	14	1/2	0.15	64	2 1/2	0.15
3/8"	26.7	32	1 1/4	19	3/4	0.32	11	1 1/8	0.32
1"	33.4	38	1 1/2	25.5	1"	0.38	15.2	1 1/4	0.38
1 1/4"	42.2	44	1 3/4	33.5	1 1/2	0.55	22.8	1 3/4	0.6
1 1/2"	48.3	51	2	38	1 1/2	0.8	28	2	0.85
2"	60.32	55	2 1/8	43	1 3/4	0.97	38.1	2 1/8	1
2 1/2"	73.02	62	2 3/8	54	2 1/2	1.55	45	2 3/8	1.7
3"	88.9	73	3	73	2 7/8	2.85	50.8	3	2.95
3 1/2"									
4"	114.3	84	3 1/8	98.5	3 1/2	4.75	80	3 1/8	4.95
5"	141.3	94	3 3/8	122	4 1/8	6.5	103.2	4 1/8	6.8
6"	168.3	105	4 1/8	146	5 1/8	12.7	124.3	4 1/2	13.7
8"									
10"									
12"									
14"									
16"									


DIMENSIONS AVAILABLE ON REQUEST



Schedule 160


Dim.	REDUCING SIZE						FULL SIZE		
	Size D (mm)	A (mm)	INCH	(mm)	INCH	WEIGHT KG	D (mm)	INCH	WEIGHT KG
1/2"	21.34	28	1 1/8	14	1/2	0.15	64	2 1/2	0.15
3/8"	26.7	32	1 1/4	19	3/4	0.32	11	1 1/8	0.32
1"	33.4	38	1 1/2	25.5	1"	0.38	21	1 1/4	0.38
1 1/4"	42.2	44	1 3/4	33.5	1 1/2	0.55	29.5	1 3/4	0.6
1 1/2"	48.3	51	2	38	1 1/2	0.8	34	2	0.85
2"	60.32	55	2 1/8	43	1 3/4	0.97	43	2 1/8	1
2 1/2"	73.02	62	2 3/8	54	2 1/2	1.55	54	2 3/8	1.7
3"	88.9	73	3	73	2 7/8	2.85	66.5	3	2.95
3 1/2"									
4"	114.3	84	3 1/8	98.5	3 1/2	4.75	87	3 1/8	4.95
5"	141.3	94	3 3/8	122	4 1/8	6.5	109.5	4 1/8	6.8
6"	168.3	105	4 1/8	146	5 1/8	12.7	132	5 1/8	13.7
8"									
10"									
12"									
14"									
16"									

DIMENSIONS AVAILABLE ON REQUEST



Extra Strong

Dim.	REDUCING SIZE						FULL SIZE		
	Size D (mm)	A (mm)	INCH	(mm)	INCH	WEIGHT KG	D (mm)	INCH	WEIGHT KG
1/8"	10.3	16	1/4	16	1/4	0.04	-	-	-
1/4"	13.71	16	1/4	16	1/4	0.04	-	-	-
3/8"	17.14	19	1/2	19	1/2	0.07	-	-	-
1/2"	21.34	19	1/2	24	1 1/8	0.09	14	1 1/8	0.07
3/4"	26.7	22	1/2	30	1 1/4	0.14	19	1 1/4	0.12
1"	33.4	27	1 1/4	36.5	1 1/2	0.21	24	1 1/2	0.18
1 1/4"	42.2	32	1 1/2	44.5	1 3/4	0.4	32	1 3/4	0.32
1 1/2"	48.3	33	1 3/4	51	2"	0.5	38	2	0.4
2"	60.32	38	1 1/2	65	2 1/8	0.79	49	2 1/8	0.72
2 1/2"	73.02	41	1 3/4	76	3"	1.18	59	3	1.13
3"	88.9	44	1 1/2	93.5	1 1/2	1.85	73.5	2 1/2	1.85
3 1/2"	101.6	48	1 3/4	101.5	3 1/2	2.54	85	3 1/2	2.3
4"	114.3	51	2"	120.5	4 1/4	2.9	97	4 1/4	3.4
5"	141.3	57	2 1/8	141	5 1/8	4.7	122	4 1/2	5
6"	168.3	78	3 1/8	170	6 1/8	10.4	146	5 1/2	10.4
8"	219.1	99	3 1/2	220.5	8 1/8	20.4	193.5	7 1/8	21
10"	273	94	3 3/8	265	10 1/8	24.8	247.5	9 1/8	25.4
12"	323.85	103	4 1/8	316	12 1/8	35	298.5	11 1/8	35
14"	355.6	100	4 3/8	351	14 1/8	37.7	330	13 1/8	39
16"	406.4	106	4 1/2	402	16 1/8	46.2	381	15"	52
18"	457.2	111	4 3/4	452	18 1/8	58.9	432	17"	59
20"	508	119	4 3/4	503	20 1/8	71.5	482.5	19 1/8	84.7
24"	598.8	140	5 1/2	605	24 1/8	141	584	23	146




Standard Weight

Dim.	REDUCING SIZE						FULL SIZE		
	Size D (mm)	A (mm)	INCH	(mm)	INCH	WEIGHT KG	D (mm)	INCH	WEIGHT KG
1/8"	10.3	16	1/4	16	1/4	0.04	-	-	-
1/4"	13.71	16	1/4	16	1/4	0.04	-	-	-
3/8"	17.14	19	1/2	19	1/2	0.07	-	-	-
1/2"	21.34	19	1/2	24	1 1/8	0.08	16	1 1/8	0.07
3/4"	26.7	22	1 1/4	30	1 1/4	0.12	20.5	1 1/4	0.12
1"	33.4	27	1 1/4	36.5	1 1/2	0.22	26	1 1/2	0.18
1 1/4"	42.2	32	1 1/2	44.5	1 3/4	0.36	35	1 3/4	0.32
1 1/2"	48.3	33	1 3/4	51	2"	0.45	41	2	0.36
2"	60.32	38	1 1/2	65	2 1/8	0.8	52.5	2 1/8	0.7
2 1/2"	73.02	41	1 3/4	76	3"	1.15	62	3	1.1
3"	88.9	44	1 1/2	93.5	1 1/2	1.8	78	2 1/2	1.7
3 1/2"	101.6	48	1 3/4	101.5	3 1/2	2.5	90.5	3 1/2	2.25
4"	114.3	51	2"	120.5	4 1/4	2.9	101.5	4"	3.05
5"	141.3	57	2 1/8	141	5 1/8	4.6	128.5	4 1/2	4.85
6"	168.3	60	2 1/4	170	6 1/8	7	154	5 1/8	7.5
8"	219.1	70	2 3/4	220.5	8 1/8	12	203.5	7 1/8	12.7
10"	273	78	3 1/8	274.5	10 1/8	19.5	254	9 1/8	20
12"	323.85	86	3 3/8	325.5	12 1/8	26.7	304.5	11 1/8	29.4
14"	355.6	89	3 1/2	357	14 1/8	29.9	336.5	13 1/8	31.8
16"	406.4	94	3 3/4	408	16 1/8	34	387.5	15 1/8	41.7
18"	457.2	97	3 3/4	459	18 1/8	44	438	17 1/8	56.7
20"	508	102	4"	510	20 1/8	53.5	489	19 1/8	79.3
24"	598.8	116	4 1/2	611	24 1/8	99.7	590.5	23 1/8	127



Socollet

3000 LBS

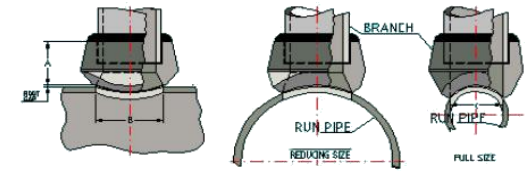

Dim.	Size	REDUCING SIZE					FULL SIZE		
	D	A		B ⁽¹⁾		WEIGHT KG	C		WEIGHT KG
	(mm)	(mm)	INCH	(mm)	INCH		(mm)	INCH	
1/8"	10.3	19	3/4"	16	5/8"	0.06	-	-	-
1/4"	13.71	19	3/4"	16	5/8"	0.06	-	-	-
3/8"	17.14	21	13/16"	19	3/4"	0.09	-	-	-
1/2"	21.34	25	1"	24	15/16"	0.11	14	9/16"	0.12
3/4"	26.7	27	1 1/16"	30	1 3/16"	0.17	19	3/4"	0.19
1"	33.4	33	1 5/16"	36.5	1 7/16"	0.29	24	15/16"	0.31
1 1/4"	42.2	33	1 5/16"	44.5	1 3/4"	0.41	32	1 1/4"	0.45
1 1/2"	48.3	35	1 3/8"	51	2"	0.46	38	1 1/2"	0.5
2"	60.32	38	1 1/2"	65	2 9/16"	0.8	49	1 15/16"	0.87
2 1/2"	73.02	46	1 13/16"	76	3"	1.4	59	2 3/16"	1.5
3"	88.9	51	2"	93.5	3 11/16"	2	73.5	2 7/8"	2.15
3 1/2"	101.6	54	2 1/8"	101.5	4"	2.6	85	3 3/16"	2.8
4"	114.3	57	2 1/4"	120.5	4 3/4"	3.35	97	3 13/16"	3.5

1) Suitable for Std. Wt & Xs pun pipes.

6000 LBS

Dim.	Size	REDUCING SIZE				
	D	A		B ⁽¹⁾		WEIGHT KG
	(mm)	(mm)	INCH	(mm)	INCH	
1/4"	13.71	28.5	1 1/8"	14	9/16"	0.2
3/8"	17.14	28.5	1 1/8"	14	9/16"	0.2
1/2"	21.34	32	1 1/4"	19	3/4"	0.3
3/4"	26.7	37	1 7/16"	25.5	1"	0.5
1"	33.4	40	1 9/16"	33.5	1 5/16"	0.9
1 1/4"	42.2	41	1 9/16"	38	1 1/2"	0.85
1 1/2"	48.3	43	1 11/16"	49	1 15/16"	1.45
2"	60.32	52	2 1/16"	59	2 5/16"	2.75

1) Fitting hole to suit sch. 160 pipe

2) Available only for reducing size outlet.

9000 LBS

Dim.	Size	REDUCING SIZE				
	D	A		B ⁽¹⁾		WEIGHT KG
	(mm)	(mm)	INCH	(mm)	INCH	
1/2"	21.34	31.5	1 1/4"	19	3/4"	0.32
3/4"	26.7	36.5	1 7/16"	25.5	1"	0.55
1"	33.4	39.5	1 9/16"	33.5	1 5/16"	0.95
1 1/2"	48.3	43	1 11/16"	49	1 15/16"	1.5
2"	60.32	52.5	2 1/16"	59	2 5/16"	2.9


1) Fitting hole to suit sch. XXS pipe

2) Available only for reducing size outlet.



Threadolet

3000 LBS

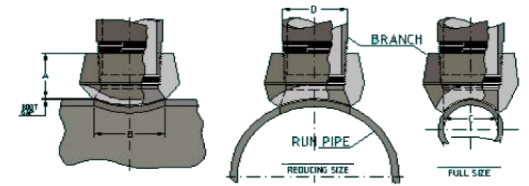

Dim.	Size	REDUCING SIZE					FULL SIZE		
	D	A		B ⁽¹⁾		WEIGHT KG	C		WEIGHT KG
	(mm)	(mm)	INCH	(mm)	INCH		(mm)	INCH	
1/8"	10.3	19	3/4"	16	5/8"	0.06	-	-	-
1/4"	13.71	19	3/4"	16	5/8"	0.06	-	-	-
3/8"	17.14	21	13/16"	19	3/4"	0.09	-	-	-
1/2"	21.34	25	1"	24	15/16"	0.11	14	9/16"	0.12
3/4"	26.7	27	1 1/16"	30	1 3/16"	0.17	19	3/4"	0.19
1"	33.4	33	1 5/16"	36.5	1 7/16"	0.29	24	15/16"	0.31
1 1/4"	42.2	33	1 5/16"	44.5	1 3/4"	0.41	32	1 1/4"	0.45
1 1/2"	48.3	35	1 3/8"	51	2"	0.46	38	1 1/2"	0.5
2"	60.32	38	1 1/2"	65	2 9/16"	0.8	49	1 15/16"	0.87
2 1/2"	73.02	46	1 13/16"	76	3"	1.4	59	2 5/16"	1.5
3"	88.9	51	2"	93.5	3 11/16"	2	73.5	2 7/8"	2.15
3 1/2"	101.6	54	2 1/8"	101.5	4"	2.6	85	3 5/16"	2.85
4"	114.3	57	2 1/4"	120.5	4 3/4"	3.35	97	3 13/16"	3.6

1) Suitable for Std. Wt & Xs pun pipes.


6000 LBS

Dim.	Size	REDUCING SIZE				
	D	A		B ⁽¹⁾		WEIGHT KG
	(mm)	(mm)	INCH	(mm)	INCH	
1/4"	13.71	28.5	1 1/8"	14	9/16"	0.2
3/8"	17.14	28.5	1 1/8"	14	9/16"	0.2
1/2"	21.34	32	1 1/4"	19	3/4"	0.3
3/4"	26.7	37	1 7/16"	25.5	1"	0.5
1"	33.4	40	1 9/16"	33.5	1 5/16"	0.9
1 1/4"	42.2	41	1 5/16"	38	1 1/2"	0.85
1 1/2"	48.3	43	1 11/16"	49	1 15/16"	1.45
2"	60.32	52	2 1/16"	59	2 5/16"	2.75

Available only for reducing size outlet.




Latrolet

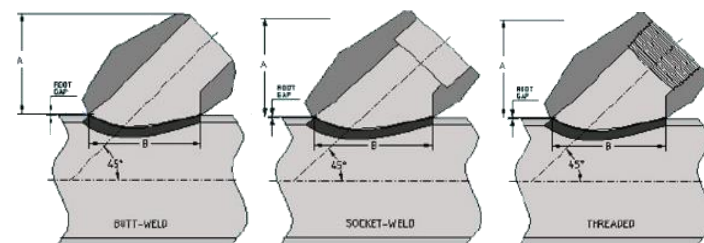

Dim.	Size	3000 LBS - STD - WT & EXTRA STRONG ⁽¹⁾					6000 LBS - SCH. 160 & DOUBLE EXTRA STRONG ⁽¹⁾				
	D	A		B		WEIGHT KG	A		B		WEIGHT KG
	(mm)	(mm)	INCH	(mm)	INCH		(mm)	INCH	(mm)	INCH	
1/4"	13.71	39.5	1 ⁹ / ₁₆ "	36.5	1 ⁷ / ₁₆ "	0.23	39.5	1 ⁹ / ₁₆ "	36.5	1 ⁷ / ₁₆ "	0.35
3/8"	17.14	39.5	1 ⁹ / ₁₆ "	36.5	1 ⁷ / ₁₆ "	0.23	39.5	1 ⁹ / ₁₆ "	36.5	1 ⁷ / ₁₆ "	0.35
1/2"	21.34	39.5	1 ⁹ / ₁₆ "	36.5	1 ⁷ / ₁₆ "	0.3	46	1 ¹³ / ₁₆ "	44.5	1 ³ / ₄ "	0.4
3/4"	26.7	46	1 ¹³ / ₁₆ "	41	1 ⁵ / ₈ "	0.35	54	2 ¹ / ₈ "	54	2 ¹ / ₈ "	0.67
1"	33.4	56	2 ³ / ₁₆ "	51	2	0.53	63.5	2 ¹ / ₂ "	66.5	2 ⁵ / ₈ "	1
1 1/4"	42.2	63.5	2 ¹ / ₂ "	66.5	2 ⁵ / ₈ "	0.86	70	2 ³ / ₄ "	76	3	1.32
1 1/2"	48.3	71	2 ¹³ / ₁₆ "	73	2 ⁷ / ₈ "	1.2	85.5	3 ³ / ₈ "	105	4 ¹ / ₈ "	2.8
2"	60.32	92	3 ⁵ / ₈ "	96	3 ¹³ / ₁₆ "	2.4	95	1 ³ / ₄ "	111	4 ³ / ₈ "	3.6
2 1/2" to 10"	Available on request as butt-welding end.						Available on request as butt-welding end.				



Elbolet

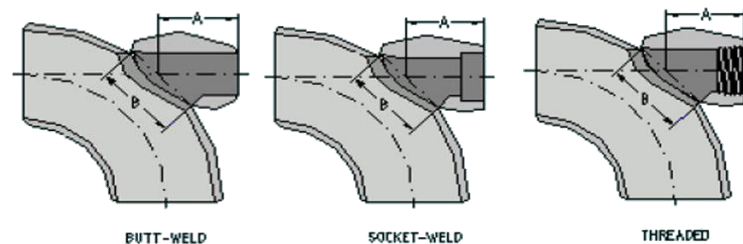

Dim.	Size	3000 LBS - STD - WT & EXTRA STRONG ⁽¹⁾					6000 LBS - SCH. 160 & DOUBLE EXTRA STRONG ⁽¹⁾				
	D	A		B		WEIGHT KG	A		B		WEIGHT KG
	(mm)	(mm)	INCH	(mm)	INCH		(mm)	INCH	(mm)	INCH	
1/4"	13.71	39.5	1 ⁹ / ₁₆ "	36.5	1 ⁷ / ₁₆ "	0.23	39.5	1 ⁹ / ₁₆ "	36.5	1 ⁷ / ₁₆ "	0.35
3/8"	17.14	39.5	1 ⁹ / ₁₆ "	36.5	1 ⁷ / ₁₆ "	0.23	39.5	1 ⁹ / ₁₆ "	36.5	1 ⁷ / ₁₆ "	0.35
1/2"	21.34	39.5	1 ⁹ / ₁₆ "	36.5	1 ⁷ / ₁₆ "	0.3	46	1 ¹³ / ₁₆ "	44.5	1 ³ / ₄ "	0.4
3/4"	26.7	46	1 ¹³ / ₁₆ "	41	1 ⁵ / ₈ "	0.35	54	2 ¹ / ₈ "	54	2 ¹ / ₈ "	0.67
1"	33.4	56	2 ³ / ₁₆ "	51	2	0.53	63.5	2 ¹ / ₂ "	66.5	2 ⁵ / ₈ "	1
1 1/4"	42.2	63.5	2 ¹ / ₂ "	66.5	2 ⁵ / ₈ "	0.86	70	1 ³ / ₄ "	76	3	1.32
1 1/2"	48.3	71	2 ¹³ / ₁₆ "	73	2 ⁷ / ₈ "	1.2	85.5	3 ³ / ₈ "	105	4 ¹ / ₈ "	2.8
2"	60.32	92	3 ⁵ / ₈ "	96	3 ¹³ / ₁₆ "	2.4	95	3 ³ / ₄ "	111	4 ³ / ₈ "	3.6
2 1/2" to 10"	Available on request as butt-welding end.						Available on request as butt-welding end.				