
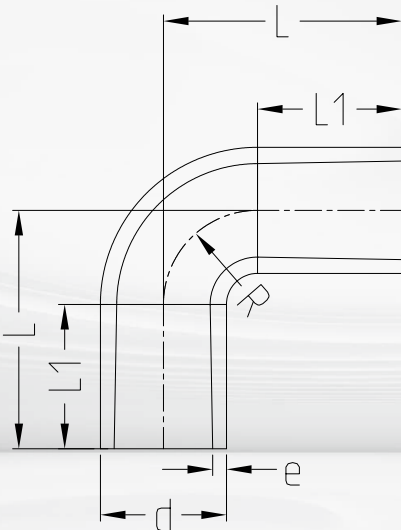


BUTT FUSION ELBOW 90°

对焊 90°弧形弯头

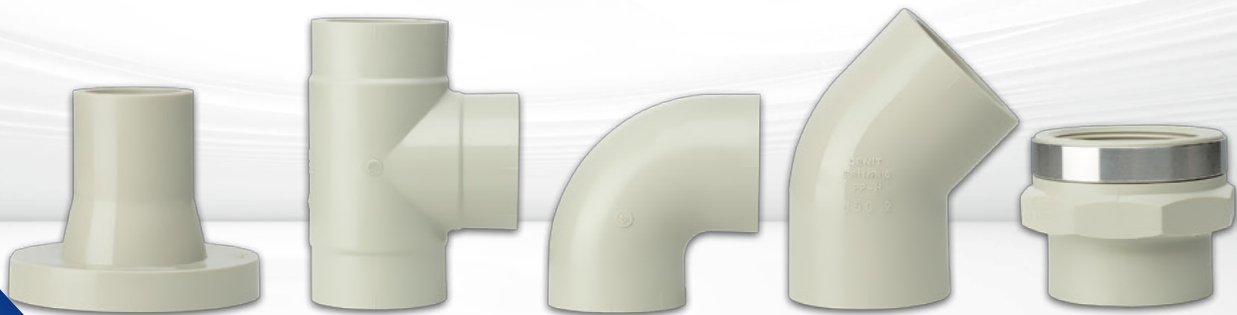

等级: S5/SDR11(PN10) Class: S5/SDR11(PN10)

产品参数


d (mm)	weight (mm)	L (mm)	L1 (mm)	R (mm)	e (mm)
20	0.008	38	23	15	2.2
25	0.013	42	23	19	2.5
32	0.022	46	21	24	3.2
40	0.04	51	21	30	4
50	0.067	58	21	37	4.9
63	0.117	66	21	45	6.1
75	0.232	100	25	75	7.2
90	0.337	115	25	90	8.6
110	0.701	135	25	110	10.4

管件 PIPE FITTING

DIN8077/8078 GB/T 18742.3-2002

BUTT FUSION ELBOW 45°

对焊 45°弯头

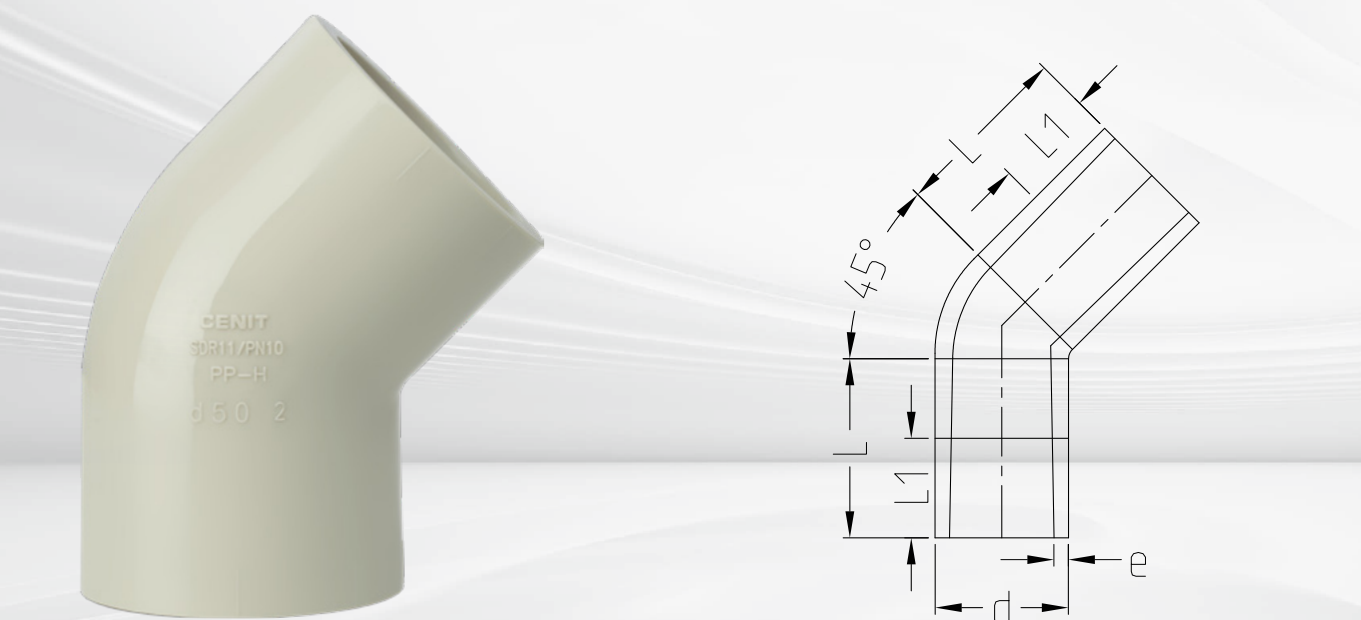


等级: S5/SDR11(PN10) Class: S5/SDR11(PN10)

产品参数

d (mm)	weight (mm)	L (mm)	L1 (mm)	e (mm)
20	0.007	32	24	2.2
25	0.011	34	25	2.5
32	0.019	36	25	3.2
40	0.033	39	25	4
50	0.095	42	29	4.9
63	0.145	47	29	6.1
75	0.241	49	29	7.2
90	0.429	57	34	8.6
110	0.57	70	43	10.4

BUTT FUSION 90° TEE

对焊 90°正三通

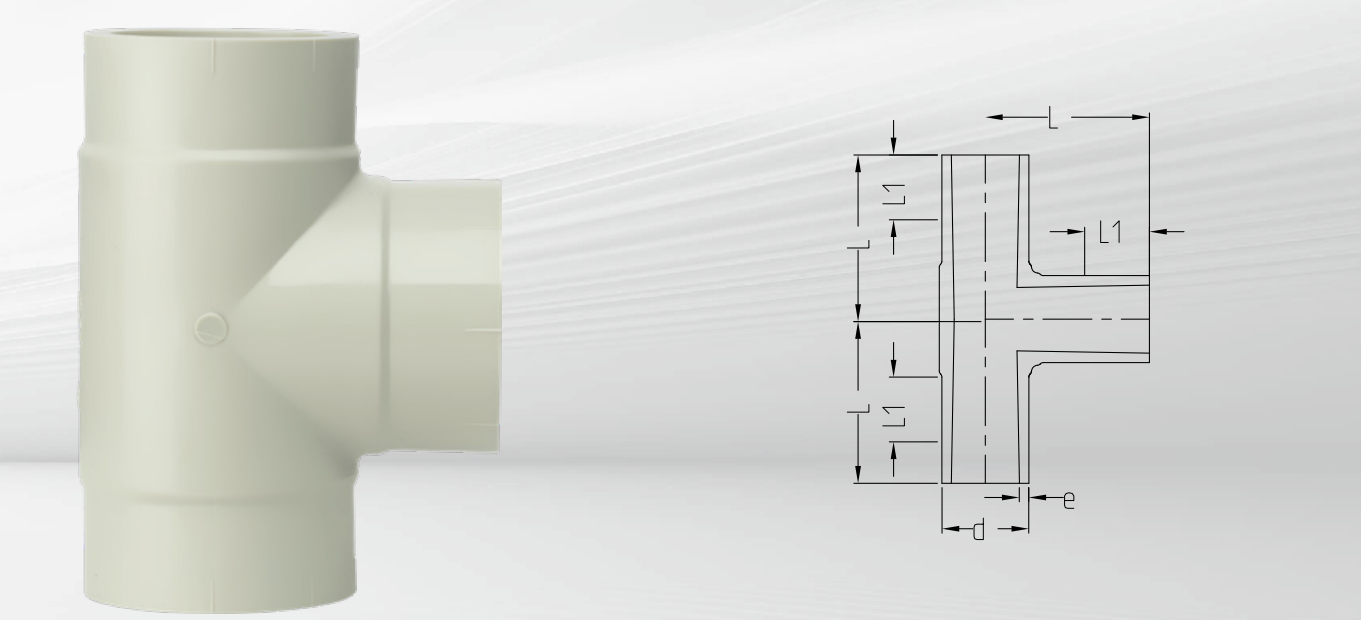



等级: S5/SDR11(PN10) Class: S5/SDR11(PN10)

产品参数

d (mm)	weight (kg)	L (mm)	L1 (mm)	e (mm)
20	0.012	38	25	2.2
25	0.02	42	25	2.5
32	0.034	46	25	3.2
40	0.059	51	25	4
50	0.105	58	25	4.9
63	0.184	66	24	6.1
75	0.298	75	26	7.2
90	0.51	90	31	8.6
110	0.933	110	37	10.4

BUTT FUSION CAP

对焊 管帽

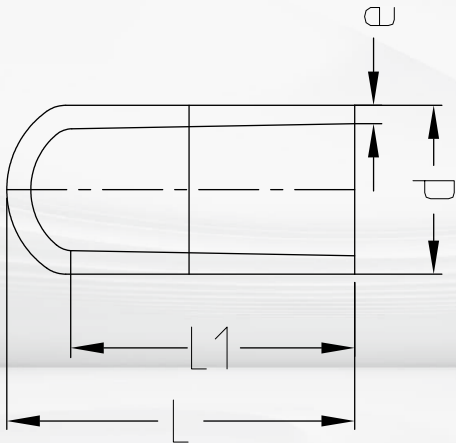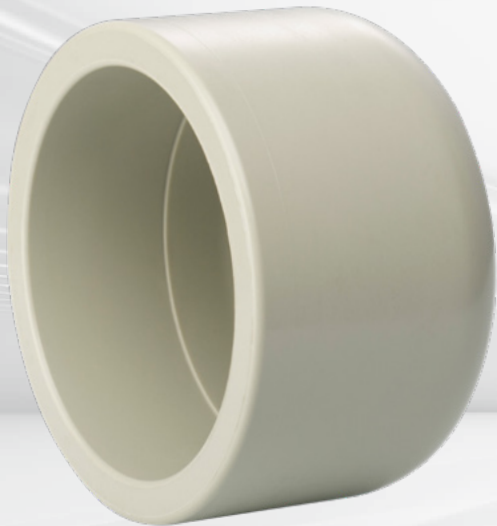


等级: S5/SDR11(PN10) Class: S5/SDR11(PN10)

产品参数

d (mm)	weight (kg)	L (mm)	L1 (mm)	e (mm)
20	0.005	42	34.2	2.2
25	0.005	50	39.3	2.5
32	0.013	55	41.7	3.2
40	0.018	65	48.2	4
50	0.043	70	49.1	4.9
63	0.08	80	56.7	6.1
75	0.126	90	59.3	7.2
90	0.107	105	65.8	8.6
110	0.384	125	79.4	10.4

BUTT FUSION BUSHING

对焊 变径

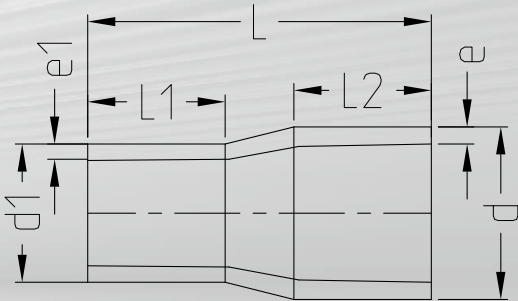


等级: S5/SDR11(PN10) Class: S5/SDR11(PN10)

产品参数

d (mm)	d1 (mm)	weight (kg)	L (mm)	L1 (mm)	L2 (mm)	e (mm)	e1 (mm)
25	20	0.007	50	20	20	2.5	2
32	20	0.01	50	20	20	3.2	2.2
32	25	0.011	50	20	24	3.2	2.5
40	20	0.015	55	20	20	4	2.2
40	25	0.016	55	20	20	4	2.5
40	32	0.019	55	20	24	4	3.2
50	25	0.025	60	20	20	4.9	2.5
50	32	0.027	60	20	20	4.9	3.2
50	40	0.03	60	20	20	4.9	4
63	32	0.043	65	20	20	6.1	3.2
63	40	0.047	65	20	20	6.1	4
63	50	0.051	65	20	20	6.1	4.9
75	40	0.064	70	20	20	7.2	4
75	50	0.065	70	20	20	7.2	4.9
75	63	0.074	70	20	20	7.2	6.1
90	63	0.012	75	22	20	8.6	6.1
90	75	0.128	75	22	20	8.6	7.2
110	75	0.215	90	28	20	10.4	7.2
110	90	0.23	90	28	20	10.4	8.6

BUTT FUSION FLANGE

对焊 法兰适配器

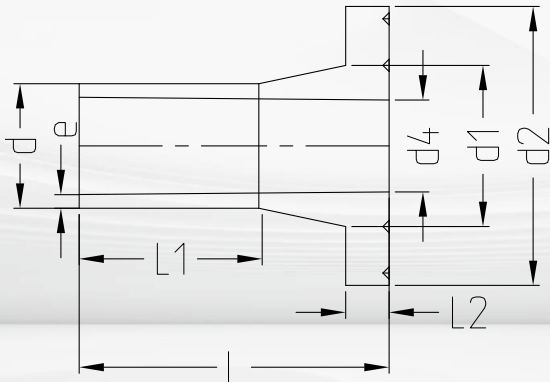


等级: S5/SDR11(PN10), 平面 / 细齿面组合 Class: Flat/Serrated surface combination

产品参数

d (mm)	DN (mm)	weight (kg)	d1 (mm)	d2 (mm)	d4 (mm)	L (mm)	L1 (mm)	L2 (mm)	e (mm)
20	15	0.015	26	45	14.8	50	29	7	2.2
25	20	0.028	32	58	19.3	52	27	9	2.5
32	25	0.042	40	68	24.8	54	28	10	3.2
40	32	0.064	50	80	37.4	64	30	11	4
50	40	0.088	61	90	43.4	67	30	12	4.9
63	50	0.144	76	105	54.5	74	30	14	6.1
75	65	0.233	90	125	70.6	80	30	16	7.2
90	80	0.316	108	140	82.6	87	35	17	8.6
110	100	0.422	131	160	105.6	102	41	18	10.4

PP-STEEL BACKING FLANGE

支撑法兰，钢衬 PP

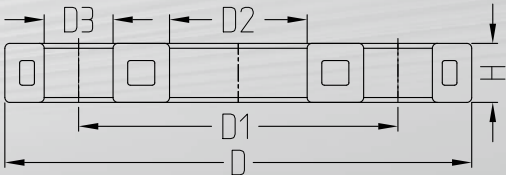


等级: 公制 PN16 CLASS: Metric PN16
材质: 钢衬 PP (30% 玻璃纤维增强) MATERIAL: PP with steel insert(30% increase of the glass-fibre reinforcement)
连接尺寸: IS7005, EN1092, BS4504, DIN2501 Connecting dimensions: IS7005, EN1092, BS4504, DIN2501
AL: 螺柱孔数 AL: number of holes / SC: 使用螺栓规格 SC: Bolt Specification

产品参数

d (mm)	DN (mm)	PN (bar)	weight (kg)	D (mm)	D1 (mm)	D2 (mm)	D3 (mm)	H (mm)	AL	SC
20	15	16	0.216	95	65	28	14	12	4	M12
25	20	16	0.276	105	75	34	14	12	4	M12
32	25	16	0.429	115	85	42	14	16	4	M12
40	32	16	0.67	140	100	51	18	16	4	M16
50	40	16	0.86	150	110	62	18	18	4	M16
63	50	16	0.93	165	125	78	18	18	4	M16
75	65	16	1.34	185	145	92	18	18	4	M16
90	80	16	1.4	200	160	108	18	20	8	M16
110	100	16	1.58	220	180	128	18	20	8	M16

BUTT FUSION ADAPTOR

对焊 适配接头

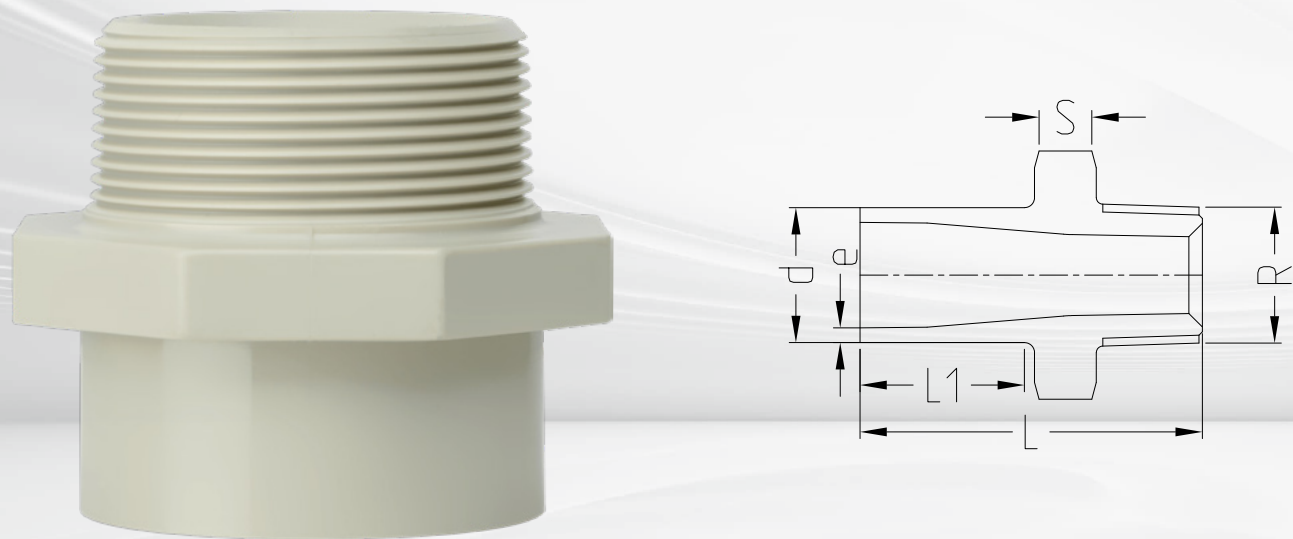

等级: S5/SDR11(PN10) Class: S5/SDR11 (PN10)


一端为 SDR11 对焊端，一端为 R 外螺纹
With butt fusion spigot SDR11,the other is R type male thread
请勿使用对 PP 有害的螺纹密封胶
Do not use thread sealing pastes that are harmful to PP
安装时避空存留应力，避空温度大范围循环变化
Install with low mechanical stress and avoid large cyclic temperature changes

产品参数

d (mm)	weight (kg)	L (mm)	L1 (mm)	S (mm)	e (mm)	Rp (inch)
20	0.013	51	24.5	32	2.2	1/2
25	0.014	52	24	36	2.5	3/4
32	0.027	55	23	46	3.2	1
40	0.041	58	23	55	4	1 1/4
50	0.062	60	23.5	65	4.9	1 1/2
63	0.096	67	25	80	6.1	2

BUTT FUSION CONNECTION ADAPTOR

对焊 适配缩节

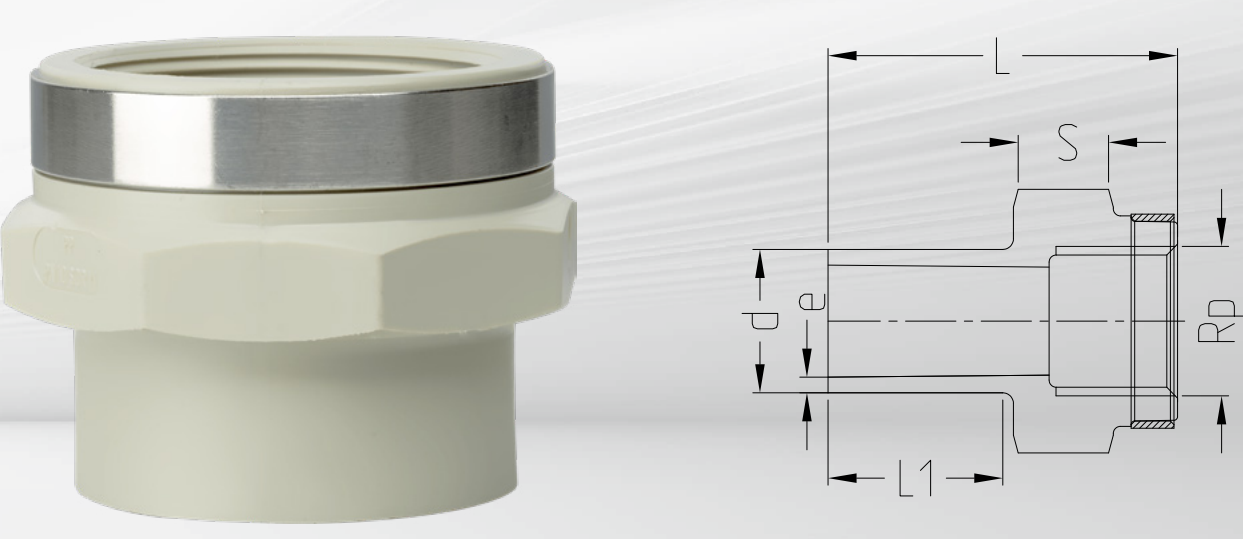

等级: S5/SDR11 (PN10) Class: S5/SDR11 (PN10)


一端为 SDR11 对焊端，一端为 Rp 内螺纹，带增强圈
With butt fusion spigot SDR11 and the other end is female thread Rp, reinforced
不锈钢增强圈 (A2)
Reinforcing ring stainless (A2)
可连接塑料或金属螺纹
Connection to plastic or metal threads
请勿使用对 PP 有害的螺纹密封胶
Do not use thread sealing pastes that are harmful to PP
安装时避空存留应力，避空温度大范围循环变化
Install with low mechanical stress and avoid large cyclic temperature changes

产品参数

d (mm)	weight (kg)	L (mm)	L1 (mm)	S (mm)	e (mm)	Rp (inch)
20	0.017	49	24.5	32	2.2	1/2
25	0.022	51	24	36	2.48	3/4
32	0.038	55	23	46	3.2	1
40	0.066	57	23	55	4.27	1 1/4
50	0.09	60	23.5	65	5.21	1 1/2
63	0.123	62	25	80	6.36	2

BUTT FUSION UNION

对焊 活接

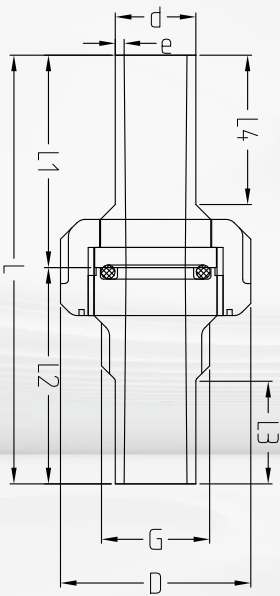


等级: S5/SDR11(PN10) Class: S5/SDR11(PN10) / 垫片: EPDM/FPM O 型圈 Gasket: EPDM/FPM O-ring

产品参数

d (mm)	weight (kg)	D (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	G (inch)	e (mm)
20	0.47	47.5	107	53	54	25	37	1	2.2
25	0.72	58	112	56	56	25	26	1 1/4	2.5
32	0.1	65	120	60	60	25	42	1 1/2	3.2
40	0.19	77	126	63	63	26	42	2	4
50	0.332	84	131	65.5	65.5	26	45	2 1/4	4.9
63	0.52	105	137	68	69	27	45	2 1/2	6.1

SOCKET FUSION ELBOW 90°

承插焊 90°弯头

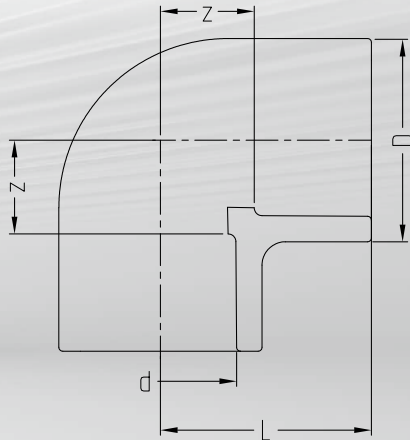


等级: S5/SDR11(PN10) Class: S5/SDR11(PN10)

产品参数

d (mm)	D (mm)	L (mm)	z (mm)	weight (kg)
20	26	27	9	0.02
25	32	32	11	0.029
32	40	37	15	0.044
40	51	43	19	0.074
50	64	51	24	0.128
63	81	62	30	0.23
75	93	76	45	0.301
90	110	88	53	0.477
110	134	106	65	0.869

SOCKET FUSION ELBOW 45°

承插焊 45°弯头

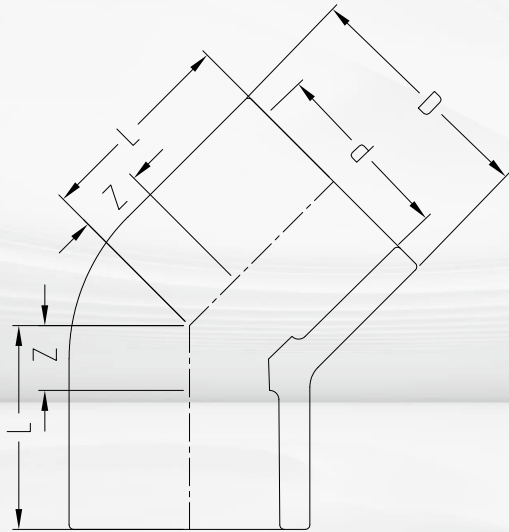


等级: S5/SDR11(PN10) Class: S5/SDR11(PN10)

产品参数

d (mm)	D (mm)	L (mm)	z (mm)	weight (kg)
20	26	22	7	0.016
25	32	24	7	0.024
32	40	29	10	0.036
40	51	33	12	0.059
50	64	38	14	0.084
63	81	45	17	0.185
75	93	51	20	0.219
90	110	58	23	0.336
110	134	68	27	0.657

SOCKET FUSION 90° TEE

承插焊 90°正三通

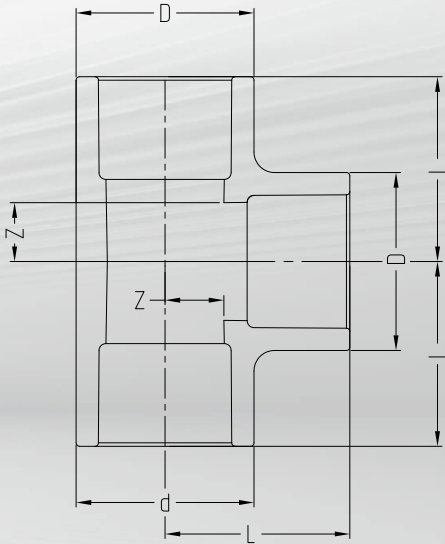



等级: S5/SDR11(PN10) Class: S5/SDR11(PN10)

产品参数

d (mm)	D (mm)	L (mm)	z (mm)	weight (kg)
20	26	27	9	0.027
25	32	32	11	0.038
32	40	37	15	0.058
40	51	43	19	0.094
50	64	51	24	0.158
63	81	62	30	0.288
75	93	76	45	0.39
90	110	88	53	0.727
110	134	106	65	1.062

SOCKET FUSION CAP

承插焊 管帽

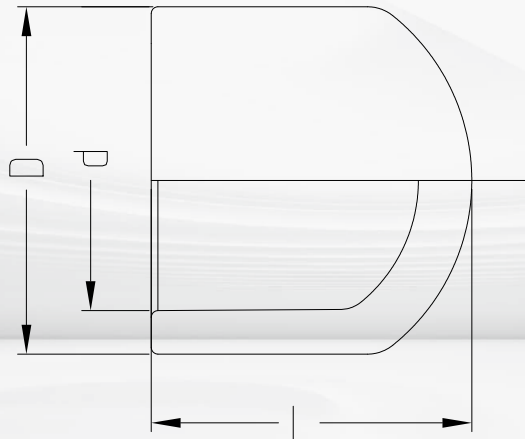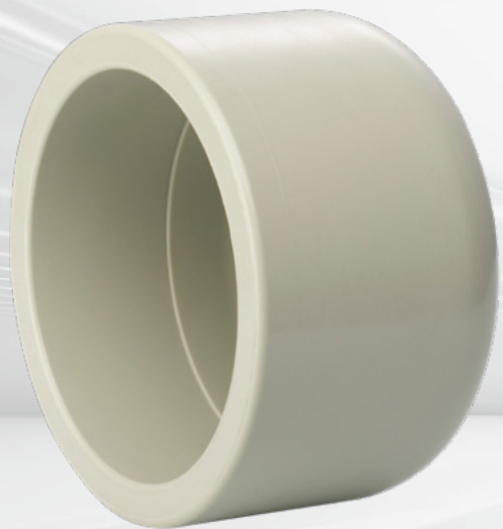


等级: S5/SDR11(PN10) Class: S5/SDR11(PN10)

产品参数

d (mm)	D (mm)	L (mm)	weight (kg)
20	26	24	0.01
25	32	27	0.014
32	40	33	0.022
40	51	38	0.024
50	64	44	0.05
63	81	51	0.079
75	93	65	0.149
90	110	77	0.277
110	134	93	0.411

SOCKET FUSION BUSHING

承插焊 变径

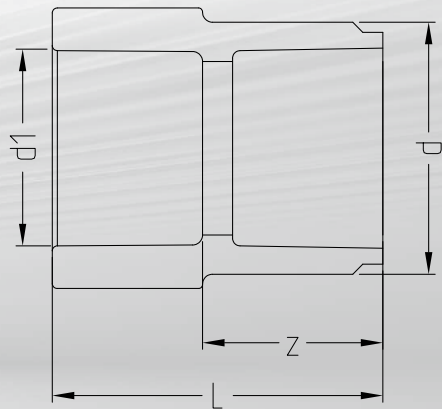



等级: S5/SDR11(PN10) Class: S5/SDR11(PN10)

产品参数

d (mm)	d1 (mm)	L (mm)	z (mm)	weight (kg)
25	20	33	33	0.014
32	20	40	40	0.016
32	25	40	40	0.02
40	20	48	48	0.022
40	25	48	48	0.026
40	32	48	48	0.031
50	25	55	55	0.034
50	32	55	55	0.035
50	40	55	55	0.04
63	32	55	55	0.047
63	40	55	55	0.058
63	50	64	64	0.061

SOCKET FUSION COUPLING

承插焊 管箍

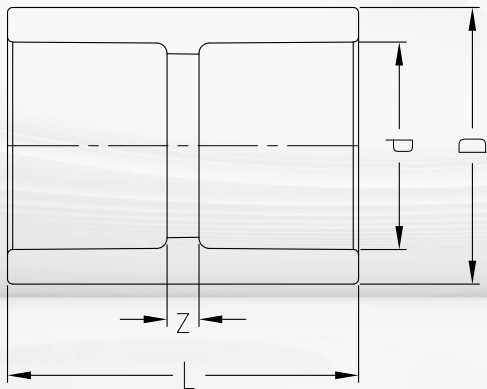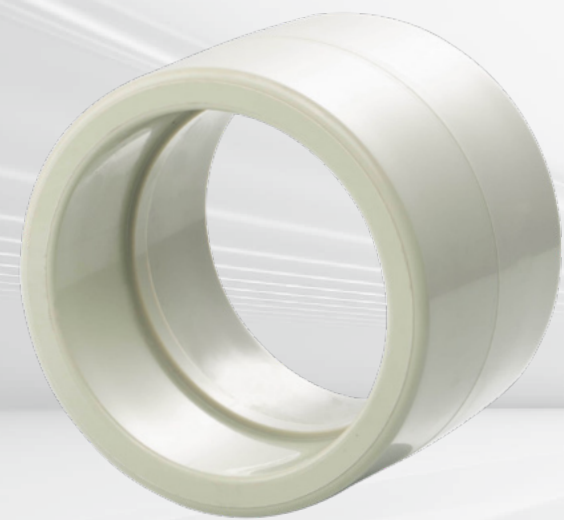


等级: S5/SDR11(PN10) Class: S5/SDR11(PN10)

产品参数

d (mm)	D (mm)	L (mm)	z (mm)	weight (kg)
20	26	33	3	0.016
25	32	36	3	0.024
32	40	40	3	0.036
40	51	46	4	0.059
50	64	52	4	0.084
63	81	60	4	0.185
75	93	70	7	0.219
90	112	81	9	0.336
110	134	96	12	0.657

SOCKET FUSION FLANGE

承插焊 法兰适配器

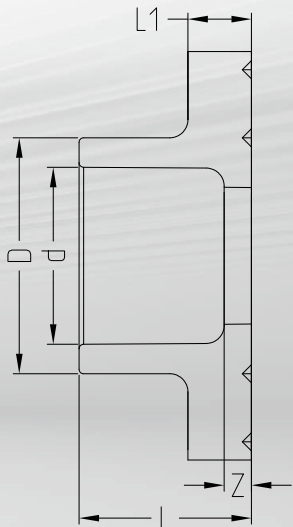


等级: S5/SDR11(PN10), 平面 / 细齿面组合 Class: Flat/Serrated surface combination

产品参数

DN (mm)	d (mm)	D (mm)	D1 (mm)	L (mm)	L1 (mm)	z (mm)	weight (kg)
15	20	26	45	19	7	3	0.011
20	25	32	58	21	9	3	0.022
25	32	40	68	23	10	3	0.033
32	40	50	80	25	11	4	0.046
40	50	61	90	28	12	4	0.06
50	63	76	105	32	14	4	0.09
65	75	90	125	36	16	5	0.155
80	90	108	140	42	17	5	0.204
100	110	131	160	48	18	6	0.286

SOCKET FUSION CONNECTION ADAPTOR

承插焊 适配缩节

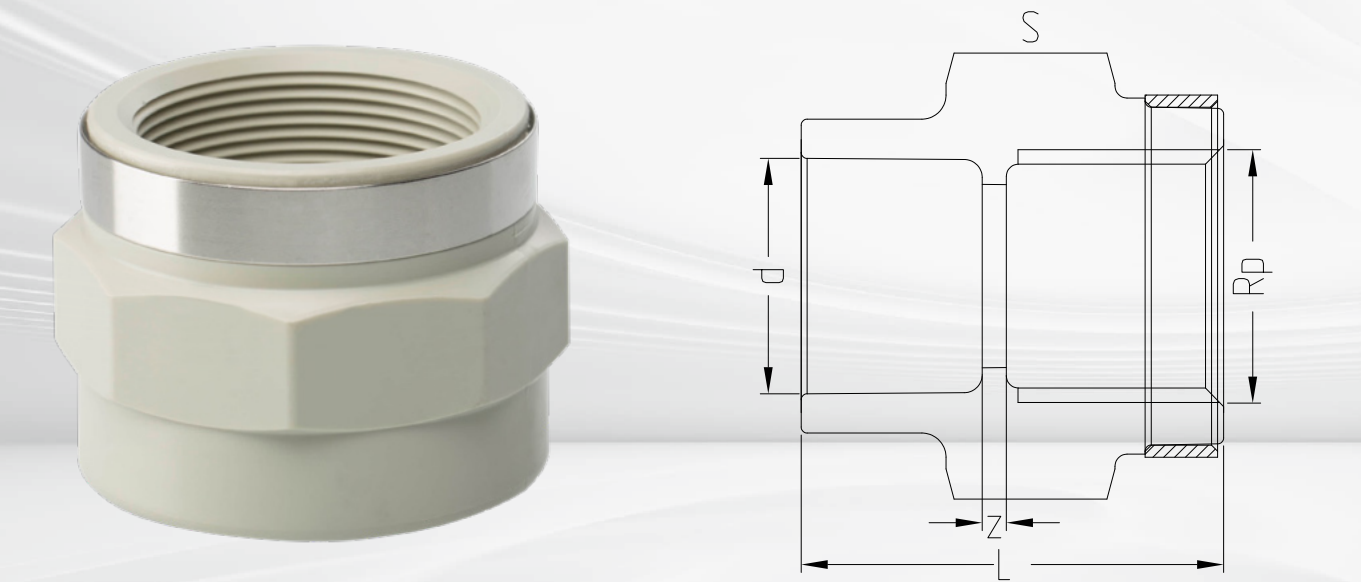

等级: S5/SDR11(PN10) Class: S5/SDR11(PN10)


一端为 SDR11 承插端，一端为 Rp 内螺纹，带增强圈
With butt fusion end SDR11 and the other end is female thread Rp, reinforced
不锈钢增强圈 (A2)
Reinforcing ring stainless (A2)
可连接塑料或金属螺纹
Connection to plastic or metal threads
请勿使用对 PP 有害的螺纹密封胶
Do not use thread sealing pastes that are harmful to PP
安装时避免存留应力，避免温度大范围循环变化
Install with low mechanical stress and avoid large cyclic temperature changes

产品参数

d (mm)	L (mm)	S (mm)	z (mm)	Rp (mm)	weight (kg)
20	35	32	3	1/2	0.018
25	40	36	3	3/4	0.025
32	45	46	6	1	0.04
40	53	55	9	1 1/4	0.064
50	54	65	5	1 1/2	0.089
63	62	80	5	2	0.144

SOCKET FUSION UNION

承插焊 活接

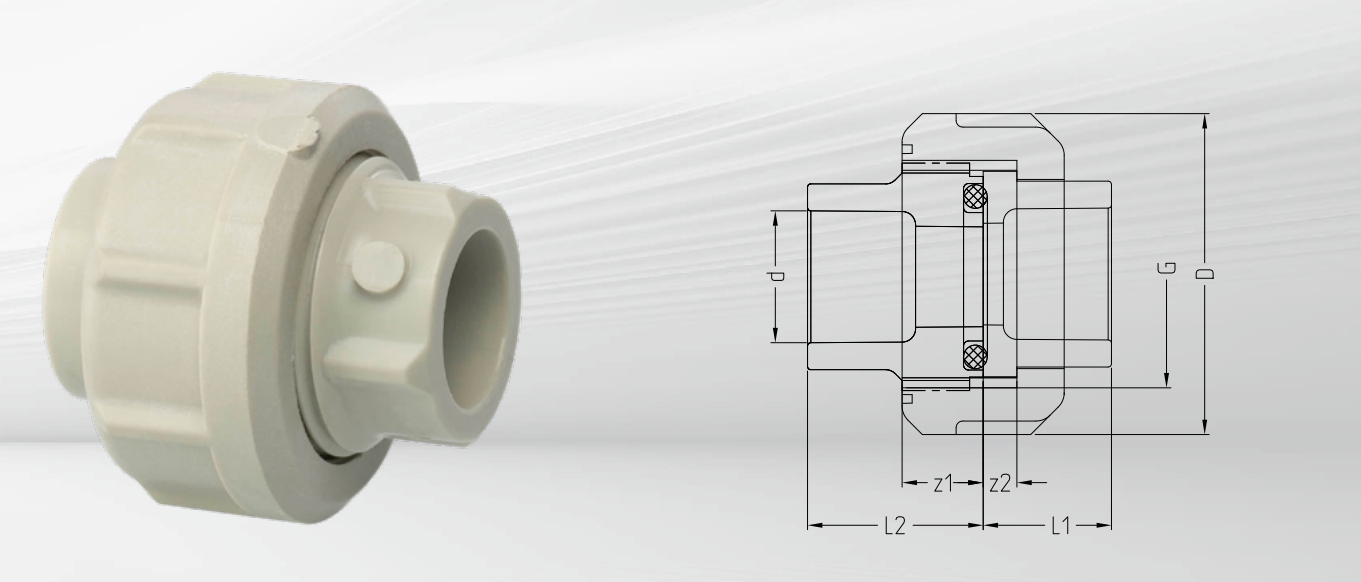

等级: S5/SDR11(PN10) Class: S5/SDR11(PN10) / 垫片: EPDM/FPM O 型圈 Gasket: EPDM/FPM O-ring

产品参数

d (mm)	D (mm)	G (inch)	L1 (mm)	L2 (mm)	z1(mm)	z2 (mm)	weight (kg)
20	47.5	1	19	26	5	12	0.038
25	58	1 1/4	21	28	5	13	0.062
32	65	1 1/2	23	30	6	14	0.08
40	77	2	27	34	6	16	0.137
50	84	2 1/4	30	39	7	18	0.136
63	105	2 1/2	34	47	8	20	0.251