



阀门 VALVE

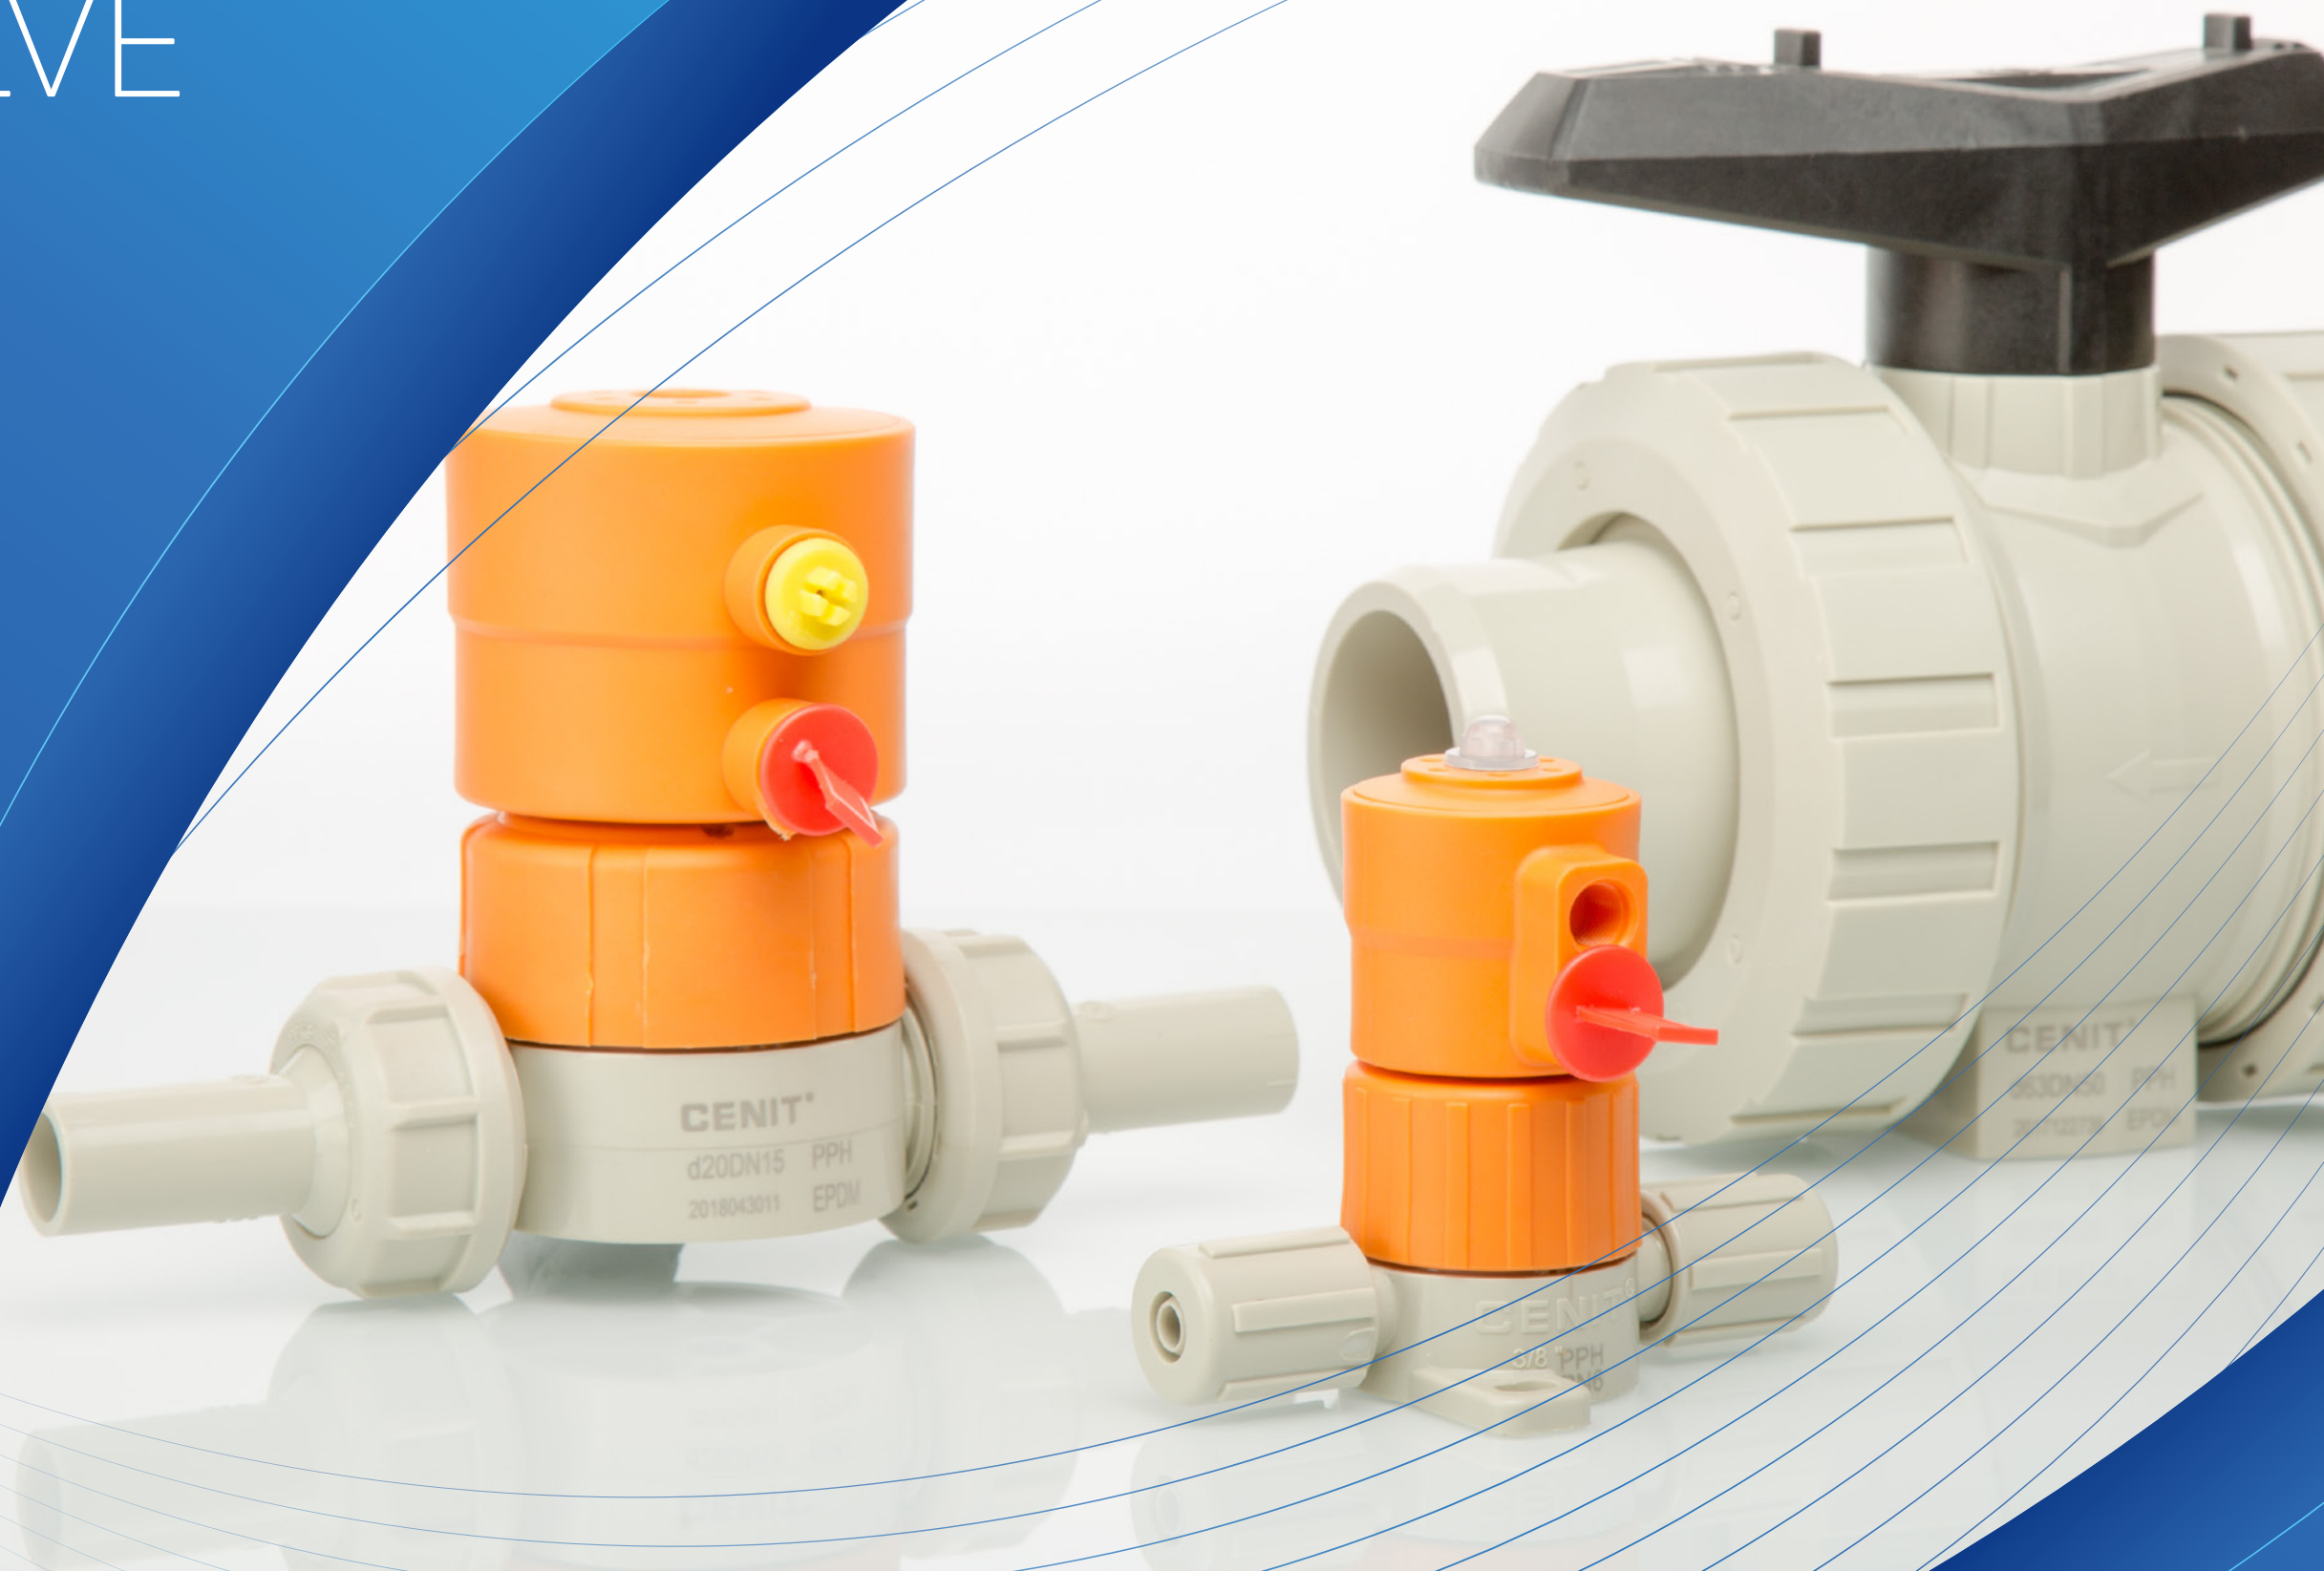

BUTT FUSION
TRUE UNION BALL VALVE

对焊 双由任球阀

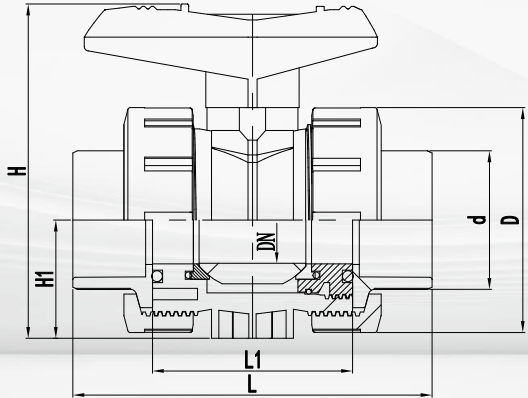


等级: PN10 Class: PN10 / 垫片: EPDM O 型圈 Gasket: EPDM O-ring
PTFE 球密封 Ball seals PTFE / 内置不锈钢固定螺帽 Inserting stainless fixed nut

产品参数

d (mm)	DN (mm)	D (mm)	L (mm)	L1 (mm)	H (mm)	H1 (mm)	weight (kg)
20	15	50.00	130.00	55.00	15.50	17.00	0.12
25	20	59.00	143.00	65.00	20.50	19.50	0.18
32	25	70.00	150.00	70.00	26.00	23.00	0.255
40	30	85.00	170.00	84.00	33.00	27.00	0.44
50	40	99.00	190.00	88.00	39.00	32.00	0.62
63	50	125.00	220.00	100.00	51.00	38.50	1.2

SOCKET FUSION
TRUE UNION BALL VALVE

承插焊 双由任球阀

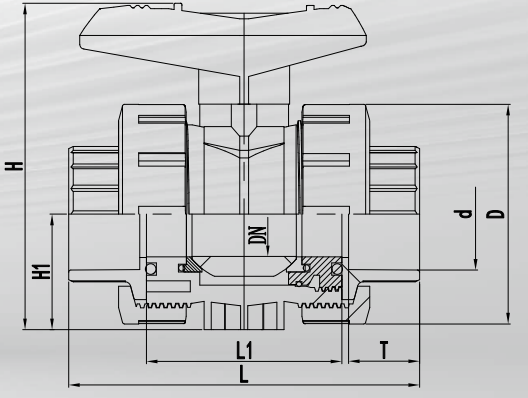


等级: PN10 Class: PN10 / 垫片: EPDM O 型圈 Gasket: EPDM O-ring
PTFE 球密封 Ball seals PTFE / 内置不锈钢固定螺帽 Inserting stainless fixed nut

产品参数

d (mm)	DN (mm)	D (mm)	L (mm)	L1 (mm)	H (mm)	H1 (mm)	T (mm)	weight (kg)
20	15	50.00	93.00	55.00	15.50	17.00	16.00	0.115
25	20	59.00	106.00	65.00	20.50	19.50	18.00	0.18
32	25	70.00	116.00	70.00	26.00	23.00	20.00	0.255
40	30	85.00	138.00	84.00	33.00	27.00	23.00	0.44
50	40	99.00	148.00	88.00	39.00	32.00	26.00	0.61
63	50	125.00	168.00	100.00	51.00	38.50	30.00	1.145

BUTT FUSION PLASTIC PNEUMATIC
TRUE UNION BALL VALVE

对焊 全塑气动双由任球阀

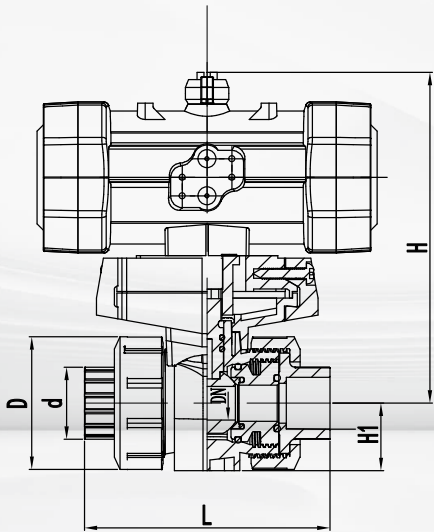

等级: PN10 Class: PN10 / 垫片: EPDM O 型圈 Gasket: EPDM O-ring
PTFE 球密封 Ball seals PTFE / 内置不锈钢固定螺帽 Inserting stainless fixed nut


执行器: 单作用, 弹簧自动复位, 常闭
Actuator: Single-acting, Spring automatic return , normally closed
打开及关闭时间: 1~2S
Open and close time:1-2 s
全塑料外壳, 可以在高腐蚀环境中使用
It can be used in high corrosive environment as it is all plastic material
可以配套电磁阀及位置开关使用
Matching with solenoid valves and position switch

产品参数

d (mm)	DN (mm)	D (mm)	L (mm)	H (mm)	H1 (mm)
20	15	50.00	130.00	159.00	17.00
25	20	59.00	143.00	168.00	19.50
32	25	70.00	150.00	168.00	23.00
40	30	85.00	170.00	202.00	27.00
50	40	99.00	190.00	202.00	32.00
63	50	125.00	220.00	225.00	38.50

SOCKET FUSION PLASTIC PNEUMATIC
TRUE UNION BALL VALVE

承插焊 全塑气动双由任球阀

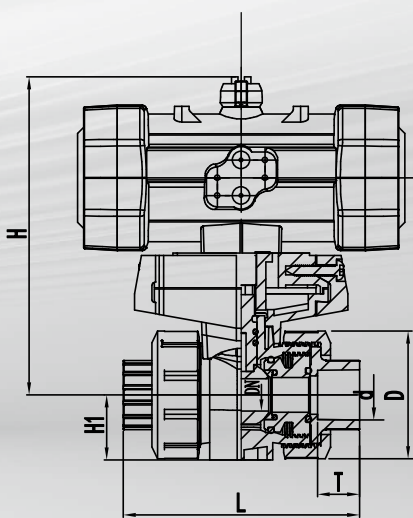

等级: PN10 Class: PN10 / 垫片: EPDM O 型圈 Gasket: EPDM O-ring
PTFE 球密封 Ball seals PTFE / 内置不锈钢固定螺帽 Inserting stainless fixed nut


执行器: 单作用, 弹簧自动复位, 常闭
Actuator: Single-acting, Spring automatic return , normally closed
打开及关闭时间: 1~2S
Open and close time:1-2 s
全塑料外壳, 可以在高腐蚀环境中使用
It can be used in high corrosive environment as it is all plastic material
可以配套电磁阀及位置开关使用
Matching with solenoid valves and position switch

产品参数

d (mm)	DN (mm)	D (mm)	L (mm)	H (mm)	H1 (mm)	T (mm)
20	15	50.00	93.00	159.00	17.00	16.00
25	20	59.00	106.00	168.00	19.50	18.00
32	25	70.00	116.00	168.00	23.00	20.00
40	30	85.00	138.00	202.00	27.00	23.00
50	40	99.00	148.00	202.00	32.00	26.00
63	50	125.00	168.00	225.00	38.50	30.00

BUTT
FUSION DIAPHRAGM VALVE

对焊 隔膜阀

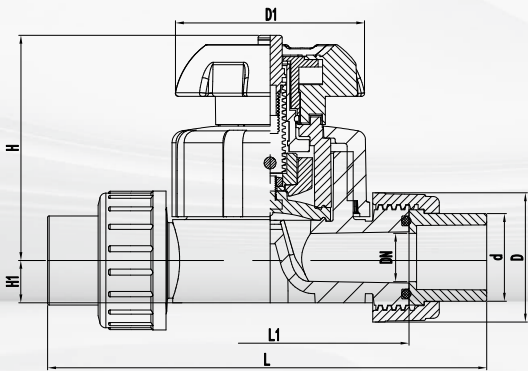


等级: PN10 Class: PN10 / 垫片: EPDM 膜片 /O 型圈 Gasket: EPDM diaphragm/O-ring
内置不锈钢固定螺帽 Inserting stainless fixed nut

产品参数

d (mm)	DN (mm)	D (mm)	L (mm)	L1 (mm)	H (mm)	H1 (mm)	D1 (mm)	weight (kg)
20	15	46.50	201.00	95.00	90.00	14.00	80.00	0.369
25	20	53.50	230.00	118.00	102.00	18.00	80.00	0.5
32	25	64.00	243.00	123.00	119.00	21.00	94.00	1.101
40	30	74.50	267.00	141.00	126.00	26.00	117.00	1.309
50	40	85.00	291.00	161.00	139.00	33.00	117.00	2.313
63	50	100.00	327.00	191.00	172.00	39.00	152.00	3.044

SOCKET
FUSION DIAPHRAGM VALVE

承插焊 隔膜阀

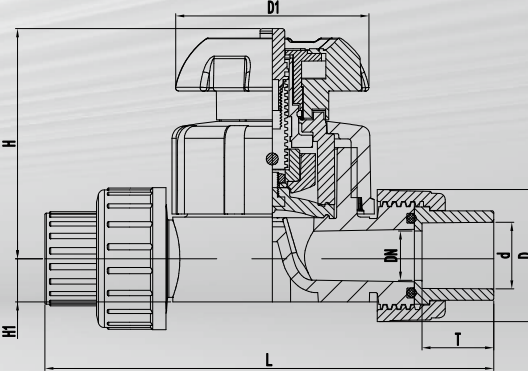


等级: PN10 Class: PN10 / 垫片: EPDM 膜片 /O 型圈 Gasket: EPDM diaphragm/O-ring
内置不锈钢固定螺帽 Inserting stainless fixed nut

产品参数

d (mm)	DN (mm)	D (mm)	L (mm)	L1 (mm)	H (mm)	H1 (mm)	D1 (mm)	T (mm)	weight (kg)
20	15	46.50	133.00	95.00	90.00	14.00	80.00	16.00	0.361
25	20	53.50	160.00	118.00	102.00	18.00	80.00	18.00	0.488
32	25	64.00	169.00	123.00	119.00	21.00	94.00	20.00	1.081
40	30	74.50	191.00	141.00	126.00	26.00	117.00	23.00	1.277
50	40	85.00	217.00	161.00	139.00	33.00	117.00	26.00	2.305
63	50	100.00	247.00	191.00	172.00	39.00	152.00	30.00	3.03

QUICK OPERATED
PNEUMATIC DIAPHRAGM VALVE

快接气动隔膜阀

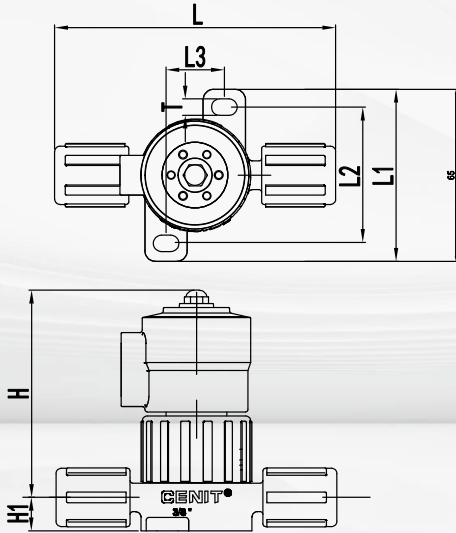

等级: PN6 Class: PN6 / 垫片: PTFE 膜片 Gasket: PTFE diaphragm


执行器: 单作用, 弹簧自动复位, 常闭
Actuator: Single-acting, Spring automatic return , normally closed
打开及关闭时间: 1~2S
Open and close time:1-2 s
全塑料外壳, 可以在高腐蚀环境中使用
It can be used in high corrosive environment as it is all plastic material

产品参数

d (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	H (mm)	H1 (mm)	T (mm)
3/8"	106.00	65.00	51.00	22.00	78.00	12.50	6.20

BUTT FUSION
PLASTIC PNEUMATIC DIAPHRAGM VALVE

对焊 全塑气动隔膜阀

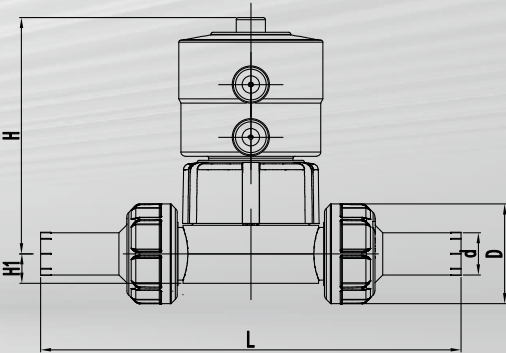

等级: PN6 Class: PN6 / 垫片: EPDM 膜片 /O 型圈 Gasket: EPDM diaphragm/O-ring


执行器: 单作用, 弹簧自动复位, 常闭
Actuator: Single-acting, Spring automatic return , normally closed
打开及关闭时间: 1~2S
Open and close time:1-2 s
全塑料外壳, 可以在高腐蚀环境中使用
It can be used in high corrosive environment as it is all plastic material

产品参数

d (mm)	L (mm)	D (mm)	H (mm)	H1 (mm)
20	152.50	46.50	112.00	14.00
25	165.50	53.50	120.00	18.00

SOCKET FUSION PLASTIC PNEUMATIC DIAPHRAGM VALVE

承插焊 全塑气动隔膜阀

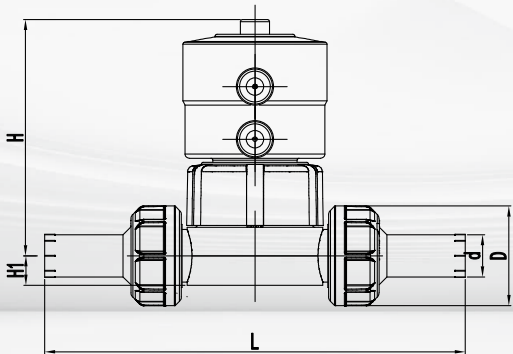

等级: PN6 Class: PN6 / 垫片: EPDM 膜片 /O 型圈 Gasket: EPDM diaphragm/O-ring

执行器: 单作用, 弹簧自动复位, 常闭
Actuator: Single-acting, Spring automatic return , normally closed
打开及关闭时间: 1~2S
Open and close time: 1-2 s
全塑料外壳, 可以在高腐蚀环境中使用
It can be used in high corrosive environment as it is all plastic material

产品参数

d (mm)	L (mm)	D (mm)	H (mm)	H1 (mm)
20	84.50	46.50	112.00	14.00
25	95.50	53.50	120.00	18.00