

工业 PVC-U/C 管材 / 管件 / 阀门

PVC-U/C PIPE / FITTING / VALVE
FOR INDUSTRY



PIPING SYSTEM PTE LTD

CONTENTS

目录

PRODUCT CATEGORY

产品类别

APPLICATIONS

行业应用



PIPE

管材

工业 PVC-U （国标）管材系列和规格尺寸
Specification of DIN(ISO,GB/T) Standard PVC-U Pipe for Industry

工业 PVC-U （美标）管材系列和规格尺寸
Specification of ASTM Standard PVC-U Pipe for Industry

工业 PVC-C （国标）管材系列和规格尺寸
Specification of DIN(ISO,GB/T) Standard PVC-C Pipe for Industry

工业 PVC-C （美标）管材系列和规格尺寸
Specification of ASTM Standard PVC-C Pipe for Industry

PVC-U/PVC-C 管管件执行标准一览表
List of Standards of PVC-U/PVC-C Pipes and Fittings

PVC-U 材料试验标准
Standards of PVC-U Material Testing

PVC-C 材料试验标准
Standards of PVC-C Testing Material



PIPE FITTING

管件

90° 弯头, PVC-U/C （国标、美标）
PVC-U/C ELBOW 90°

45° 弯头, PVC-U/C （国标、美标）
PVC-U/C ELBOW 45°

正三通, PVC-U/C （国标、美标）
PVC-U/C EQUAL TEE

异三通, PVC-U/C （国标、美标）
PVC-U/C REDUCING TEE

铜内丝 90° 弯头, PVC-U/C （国标）
PVC-U/C COPPER THREADED ELBOW 90°

正四通, PVC-U/C （国标、美标）
PVC-U/C EQUAL CROSS

变径（补芯）, PVC-U/C （国标、美标）
PVC-U/C BUSHING

铜内丝三通, PVC-U/C （国标）
PVC-U/C COPPER THREADED TEE

异径, PVC-U/C （国标、美标）
PVC-U/C REDUCER

铜内丝直接, PVC-U/C （国标）
PVC-U/C COPPER THREADED REDUCER

管堵, PVC-U/C （国标、美标）
PVC-U/C CAP

管箍, PVC-U/C （国标、美标）
PVC-U/C COUPLING

内丝, PVC-U/C （国标、美标）
PVC-U/C FEMALE ADAPTOR

外丝, PVC-U/C （国标、美标）
PVC-U/C MALE ADAPTOR

单片式法兰, PVC-U/C （国标、美标）
PVC-U/C ONE-PIECE FLANGE

活套平承法兰, PVC-U/C （国标、美标）
PVC-U/C VANSTONE FLANGE

盲法兰, PVC-U/C （国标、美标） PVC-U/C BLIND FLANGE
由任（由令）, PVC-U/C （国标、美标） PVC-U/C UNION
法兰垫, 三元乙丙橡胶, 氟橡胶 (EPDM, FPM) （国标、美标） FLANGE GASKET
管卡, PVC-U （国标） PVC-U BRACKET
双头外丝, PVC-U （美标） PVC-U HEX NIPPLE
斜三通, PVC-U （国标、美标） PVC-U Y-TEE



VALVE

阀门

插口双由令球阀, PVC-U/C （国标、美标、日标）
PVC-U/C SOCKET TRUE UNION BALL VALVE

丝口式双由令球阀, PVC-U/C （国标、美标、日标）
PVC-U/C THREADED TRUE UNION BALL VALVE

法兰式双由令球阀, PVC-U/C （国标、美标、日标）
PVC-U/C FLANGED TRUE UNION BALL VALVE

气动插口式双由令球阀, PVC-U/C （国标、美标、日标）
PVC-U/C PNEUMATIC SOCKET TRUE UNION BALL VALVE

气动法兰式双由令球阀, PVC-U/C （国标、美标、日标）
PVC-U/C PNEUMATIC FLANGED TRUE UNION BALL VALVE

气动丝口式双由令球阀, PVC-U/C （国标、美标、日标）
PVC-U/C PNEUMATIC THREADED TRUE UNION BALL VALVE

电动插口式双由令球阀, PVC-U/C （国标、美标、日标）
PVC-U/C ELECTRIC SOCKET TRUE UNION BALL VALVE

电动法兰式双由令球阀, PVC-U/C （国标、美标、日标）
PVC-U/C ELECTRIC FLANGED TRUE UNION BALL VALVE

电动丝口式双由令球阀, PVC-U/C （国标、美标、日标）
PVC-U/C ELECTRIC THREADED TRUE UNION BALL VALVE

手动式蝶阀, PVC-U/C （国标、美标、日标）
PVC-U/C ECCENTRIC BUTTERFLY VALVE (MANUAL TYPE)

齿轮式蝶阀（国标、美标、日标）
PVC-U/C ECCENTRIC BUTTERFLY VALVE (GEAR TYPE)

气动式蝶阀, PVC-U/C （国标、美标、日标）
PVC-U/C PNEUMATIC ECCENTRIC BUTTERFLY VALVE

电动式蝶阀, PVC-U/C （国标、美标、日标）
PVC-U/C ELECTRIC ECCENTRIC BUTTERFLFLY VALVE

法兰式隔膜阀, PVC-U/C （国标、美标、日标）
PVC-U/C FLANGED DIAPHRAGM VALVE

插口式隔膜阀, PVC-U/C （国标、美标）
PVC-U/C SOCKET DIAPHRAGM VALVE

由令式插口隔膜阀, PVC-U/C （国标、美标、日标）
PVC-U/C TRUE UNION DIAPHRAGM VALVE

插口式双由令止回阀, PVC-U/C （国标、美标、日标）
PVC-U/C SOCKET TURE UNION CHECK VALVE

， PVC-U/C （国标、美标、日标）
PVC-U/C THREADED TRUE UNION CHECK VALVE

法兰式双由令止回阀, PVC-U/C （国标）
PVC -U/C FLANGED TRUE UNION CHECK VALVE

旋启式止回阀, PVC-U/C （国标、美标、日标）
PVC-U/C SWING CHECK VALVE TOP-HINGED TYPE

单由令止回阀, PVC-U/C （国标）
PVC-U/C SINGLE UNION CHECK VALVE

单由令底阀, PVC-U/C （国标）
PVC-U/C SINGLE UNION FOOT VALVE

摆动式底阀, PVC-U/C （国标）
PVC-U/C SWING FOOT VALVE

摆动式止回阀, PVC-U/C （国标）
PVC-U/C SWING CHECK VALVE

取样阀, PVC-U/C （国标）
PVC-U/C SAMPLING VALVE

PRODUCT CATEGORY

产品类别

工业系列管材

PVC-U	20mm-800mm	S4/S5/S6.3/S8/S10/S12.5/S16/S20
	1/2" -24"	SCH40/SCH80
PVC-C	20mm-630mm	S4/S5/S6.3/S10
	1/2" -24"	SCH40/SCH80



管材 / PIPE

工业系列管件

胶粘式管件 (PN10.PN12.5.PN16) 20mm-630m
胶粘式管件 SCH80 1/2" -24"



管件 / PIPE FITTING

工业系列阀门

双由令球阀: (手柄式, 气动式, 电动式)
20mm-110mm 1/2 "-4 " 16A-100A

蝶阀: (手柄式, 齿轮式, 气动式, 电动式)
63mm-400mm 2 "-16 " 50A-318A

隔膜阀: (法兰式, 插口式, 由令式)
20mm-160mm 1/2 "-6 " 16A-150A

止回阀: (单由令式, 双由令式, 摆动式, 旋启式)
20mm-225mm 1/2 "-8 " 16A-200A

底阀: (由令式, 摆动式)
20mm-160mm



阀门 / VALVE

APPLICATIONS

行业应用



管路系统的专家级工厂 EXPERT IN PIPING SYSTEM



· 化工行业 · 建筑行业 · 水处理行业 · 医疗制药行业
· 光伏行业 · 电子行业 · 冶金行业 · 食品加工行业
· Chemical Industry · Construction Industry · Water Treatment Industry · Pharmaceutical Industry
· Photovoltaic Industry · Semiconductor Industry · Metallurgical Industry · Food-processing Industry



管材 PIPE



Specification of DIN(ISO,GB/T) Standard PVC-U Pipe for Industry

工业 PVC-U （国标）管材系列和规格尺寸

管材介绍

Pipe Introduction

管材特点

Features

1. 物化性能优良。用 PVC-U 生产的管材，耐腐蚀，抗冲强度高，流体阻力小（较同口径铸铁管流量提高 30%）。耐老化，使用寿命长（据权威机构测试资料说明，使用年限为 50 年），是工业用流体输送的理想材料。

2. 质地实用，安装方便。重量低于同口径铸铁管 20%，可大大加快工程进度和降低施工费用。

3. 内壁光滑，排水流畅，管道不易堵塞。

4. 节约施工费用。使用 PVC-U 管比使用同样规格的铸铁管的综合造价低，维修费用低。
1. Excellent physical and chemical properties. Pipes made of UPVC have corrosion resistance, high impact strength, and low fluid resistance (30% higher flow than cast iron pipes of the same diameter). Aging resistance and long service life (according to the test data of authoritative institutions, the service life is up to 50 years), it is an ideal material for industrial fluid transportation.

2. Lightweight and practical, easy to install. The weight is 20% lower thanthe cast iron pipe of the same diameter, which can greatly speed up the project progress and reduce the construction cost.

3. Smooth inner wall for smooth drainage and less clogging. Unique inspection port design makes inspection easy and without any tools.

4. Save on construction costs. The overall cost of using UPVC pipe is lower than that of cast iron pipe of the same specification, and the maintenance cost is lower.

国标 PVC-U 管材规格

Specification of DIN(ISO,GB/T) PVC-U Pipe

GB/T4219-2008 01 版 单位：毫米 unit:mm

公称外径 dn Nominal Outside Diameter Dn	公差 dn Tolerance of Nominal Outside Diameter Dn	公称压力 Nominal pressure															
		S20		S16		S12.5		S10		S8		S6.3		S5		S4	
		壁厚 Thickness	公差 Tolerance	壁厚 Thickness	公差 Tolerance	壁厚 Thickness	公差 Tolerance	壁厚 Thickness	公差 Tolerance	壁厚 Thickness	公差 Tolerance	壁厚 Thickness	公差 Tolerance	壁厚 Thickness	公差 Tolerance	壁厚 Thickness	公差 Tolerance
20	0.3(0.2)	-	-	-	-	-	-	-	-	-	-	2.0	0.4	2.0	0.4	2.3	0.5
25	0.3(0.2)	-	-	-	-	-	-	-	-	2.0	0.4	2.0	0.4	2.3	0.5	2.8	0.5
32	0.3(0.2)	-	-	-	-	-	-	2.0	0.4	2.0	0.4	2.4	0.5	2.9	0.5	3.6	0.6
40	0.3(0.2)	-	-	2.0	0.4	2.0	0.4	2.0	0.4	2.4	0.5	3.0	0.5	3.7	0.6	4.5	0.7
50	0.3(0.2)	-	-	2.0	0.4	2.0	0.4	2.4	0.5	3.0	0.5	3.7	0.6	4.6	0.7	5.6	0.9
63	0.3	-	-	2.0	0.4	2.5	0.5	3.0	0.5	3.8	0.6	4.7	0.8	5.8	0.9	7.1	1.1
75	0.3	-	-	2.3	0.5	2.9	0.5	3.6	0.6	4.5	0.7	5.6	0.9	6.9	1.1	8.4	1.3
90	0.3	-	-	2.8	0.5	3.5	0.6	4.3	0.7	5.4	0.9	6.7	1.1	8.2	1.3	10.1	1.6
110	0.4	2.7	0.5	3.4	0.6	4.2	0.7	5.3	0.8	6.6	1.1	8.1	1.3	10.0	1.2	-	-
125	0.4	3.1	0.6	3.9	0.6	4.8	0.8	6.0	0.9	7.4	1.2	9.2	1.4	11.4	1.4	-	-
140	0.5	3.5	0.6	4.3	0.7	5.4	0.9	6.7	1.1	8.3	1.3	10.3	1.6	12.7	1.5	-	-
160	0.5	4.0	0.6	4.9	0.8	6.2	1.0	7.7	1.2	9.5	1.5	11.8	1.8	14.6	1.7	-	-
180	0.6	4.4	0.7	5.5	0.9	6.9	1.1	8.6	1.3	10.7	1.7	13.3	2.0	16.4	1.9	-	-
200	0.6	4.9	0.8	6.2	1.0	7.7	1.2	9.6	1.5	11.9	1.8	14.7	2.3	18.2	2.1	-	-
225	0.7	5.5	0.9	6.9	1.1	8.6	1.3	10.8	1.7	13.4	2.1	16.6	2.5	-	-	-	-
250	0.8	6.2	1.0	7.7	1.2	9.6	1.5	11.9	1.8	14.8	2.3	18.4	2.8	-	-	-	-
280	0.9	6.9	1.1	8.6	1.3	10.7	1.7	13.4	2.1	16.6	2.5	20.6	3.1	-	-	-	-
315	1.0	7.7	1.2	9.7	1.5	12.1	1.9	15.0	2.3	18.7	2.9	23.2	3.5	-	-	-	-
355	1.1	8.7	1.4	10.9	1.7	13.6	2.1	16.9	2.6	21.1	3.2	26.1	4.0	-	-	-	-
400	1.2	9.8	1.5	12.3	1.9	15.3	2.3	19.1	2.9	23.7	3.6	29.4	4.5	-	-	-	-
450	1.4	11.0	1.7	13.8	2.1	17.2	2.6	21.5	3.3	26.7	4.1	33.1	4.9	-	-	-	-
500	1.5	12.3	1.9	15.3	2.3	19.1	2.9	23.9	3.6	29.7	4.5	36.8	5.6	-	-	-	-
560	1.7	13.7	2.1	17.2	2.6	21.4	3.3	26.7	4.1	-	-	-	-	-	-	-	-
630	1.9	15.4	2.4	19.3	2.9	24.1	3.7	30.0	4.5	-	-	-	-	-	-	-	-
710	2.0	17.4	2.7	21.8	3.3	27.2	4.1	-	-	-	-	-	-	-	-	-	-
800	2.0	19.6	3.0	24.5	3.7	30.6	4.6	-	-	-	-	-	-	-	-	-	-

c 值 C Value	管系列 S、标准尺寸比 SDR 与公称压力 PN 对照 Comparison Table of Nominal Pressure(PN) and S/SDR Values						
2.0	S20 SDR41	S16 SDR41	S12.5 SDR26	S10 SDR21	S8 SDR17	S6.3 SDR13.6	S5 SDR11
	PN0.63MPa	PN0.8MPa	PN1.0MPa	PN1.25MPa	PN1.6MPa	PN2.0MPa	PN2.5MPa
2.5	S20 SDR41	S16 SDR41	S12.5 SDR26	S10 SDR21	S8 SDR17	S6.3 SDR13.6	S5 SDR11
	PN0.5MPa	PN0.63MPa	PN0.8MPa	PN1.0MPa	PN1.25MPa	PN1.6MPa	PN2.0MPa
注：以上数据基于 MRS 值为 25 MPa。 PS: The above data is based on the MRS Value of 25Mpa							

Specification of ASTM Standard PVC-U Pipe for Industry

工业 PVC-U （美标）管材系列和规格尺寸

美标 PVC-U 管材规格

Specification of ASTM PVC-U Pipe

ASTM D1785 单位：毫米 unit:mm

外径（英制） Outside Diameter (inch)	外径（mm） Outside Diameter (mm)	外径公差（mm） Tolerance of Outside Diameter(mm)	SCH40		SCH80	
			壁厚 Thickness mm	公差 Tolerance mm	壁厚 Thickness mm	公差 Tolerance mm
1/2"	21.34	±0.1	2.77	0.51	3.73	0.51
3/4"	26.67	±0.1	2.87	0.51	3.91	0.51
1"	33.4	±0.13	3.38	0.51	4.55	0.51
1 1/4"	42.16	±0.13	3.56	0.51	4.85	0.51
1 1/2"	48.26	±0.15	3.68	0.51	5.08	0.61
2"	60.32	±0.15	3.91	0.51	5.54	0.66
2 1/2"	73.02	±0.18	5.16	0.61	7.01	0.84
3"	88.9	±0.20	5.49	0.66	7.62	0.91
4"	114.3	±0.23	6.02	0.71	8.56	1.02
5"	141.3	±0.25	6.55	0.79	9.52	1.14
6"	168.28	±0.28	7.11	0.86	10.97	1.32
8"	219.08	±0.38	8.18	0.99	12.70	1.52
10"	273.05	±0.38	9.27	1.12	15.06	1.80
12"	323.85	±0.38	10.31	1.24	17.45	2.08
14"	355.6	±0.38	11.10	1.35	19.05	2.29
16"	406.4	±0.48	12.70	1.52	21.41	2.57
18"	457.2	±0.48	14.27	1.70	23.80	2.84
20"	508	±0.58	15.06	1.80	26.19	3.15
24"	609.6	±0.79	17.45	2.08	30.94	3.71

Specification of DIN(ISO,GB/T) Standard PVC-C Pipe for Industry

工业 PVC-C （国标）管材系列和规格尺寸

管材介绍 Pipe Introduction

管材特点 Features

- 1.PVC-C 由聚氯乙烯（PVC）树脂氯化改性制得，是一种新型工程塑料。该产品为灰色或淡黄色无味、无臭、无毒的疏松颗粒或粉末。PVC 树脂经过氯化以后；化学稳定性增加；耐热性提高。
- 2.PVC-C 管道是以氯化聚氯乙烯树脂为主要原料，加入为提高其加工性能所必须的添加剂，经济出成型的产品。
- 1.PVC-C is a new type of engineering plastic prepared by chlorination modification of polyvinyl chloride (PVC) resin. The product is gray or yellowish tasteless, odorless, non-toxic loose particles or powder. After chlorination, the chemical stability and heat resistance of PVC resin increased.
- 2.PVC-C pipe is an extruded product with chlorinated polyvinyl chloride resin as the main raw material and additives necessary to improve its processability.

PVC-C 管材规格 Specification of DIN(ISO,GB/T) PVC-C Pipe

GB/T18998.2-2003 单位：毫米 unit:mm

公称外 径 dn Nominal Outside Diameter Dn	公称外径 公差 dn Tolerance of Nominal Outside Diameter Dn	公称压力 Nominal pressure											
		S12.5		S10		S8		S6.3		S5		S4	
		壁厚 Thickness mm	公差 Tolerance mm	壁厚 Thickness mm	公差 Tolerance mm	壁厚 Thickness mm	公差 Tolerance mm	壁厚 Thickness mm	公差 Tolerance mm	壁厚 Thickness mm	公差 Tolerance mm	壁厚 Thickness mm	公差 Tolerance mm
20	0.2	-	-	-	-	-	-	-	-	2.0	0.4	2.3	0.5
25	0.2	-	-	-	-	-	-	2.0	0.4	2.3	0.5	2.8	0.5
32	0.2	-	-	-	-	-	-	2.4	0.5	2.9	0.5	3.6	0.6
40	0.2	-	-	-	-	2.4	0.5	3.0	0.5	3.7	0.6	4.5	0.7
50	0.2	2.0	0.4	2.4	0.5	3.0	0.5	3.7	0.6	4.6	0.7	5.6	0.8
63	0.3	2.5	0.5	3.0	0.5	3.8	0.6	4.7	0.7	5.8	0.8	7.1	1.0
75	0.3	2.9	0.5	3.6	0.6	4.5	0.7	5.6	0.8	6.8	0.9	8.4	1.1
90	0.3	3.5	0.6	4.3	0.7	5.4	0.9	6.7	0.9	8.2	1.1	10.1	1.3
110	0.4	4.2	0.7	5.3	0.8	6.6	1.1	8.1	1.1	10.0	1.2	12.3	1.5
125	0.4	4.8	0.8	6.0	0.8	7.4	1.2	9.2	1.2	11.4	1.4	14.0	1.6
140	0.5	5.4	0.9	6.7	0.9	8.3	1.3	10.3	1.3	12.7	1.5	15.7	1.8
160	0.5	6.2	1.0	7.7	1.0	9.5	1.5	11.8	1.4	14.6	1.7	17.9	2.0
180	0.6	6.9	1.1	8.6	1.1	10.7	1.7	13.3	1.6	16.4	1.9	20.1	2.3
200	0.6	7.7	1.2	9.6	1.2	11.9	1.8	14.7	1.7	18.2	2.1	22.4	2.5
225	0.7	8.6	1.3	10.8	1.3	13.4	2.1	16.6	1.9	20.5	2.3	25.1	2.8
250	0.8	9.6	1.5	11.9	1.4	14.8	2.3	18.4	2.1	22.7	2.5	27.9	3.0
280	0.9	10.7	1.7	13.4	1.6	16.6	2.5	20.6	2.3	-	-	-	-
315	1.0	12.1	1.9	15.0	1.7	18.7	2.9	23.2	2.6	-	-	-	-
355	1.1	13.6	2.1	16.9	1.9	21.1	3.2	26.1	2.9	-	-	-	-
400	1.2	15.3	2.3	19.1	2.2	23.7	3.6	29.4	3.2	-	-	-	-
500	1.5	-	-	23.9	3.6	-	-	36.8	5.6	-	-	-	-
630	1.9	-	-	30.0	4.5	-	-	-	-	-	-	-	-

Specification of ASTM Standard PVC-C Pipe for Industry

工业 PVC-C （美标）管材系列和规格尺寸

产品参数 SPECIFICATIONS

ASTM F441 单位：毫米 unit:mm

外径（英制） Outside Diameter (inch)	外径（mm） Outside Diameter (mm)	外径公差 (mm) Tolerance of Outside Diameter(mm)	SCH40		SCH80	
			壁厚 Thickness mm	公差 Tolerance mm	壁厚 Thickness mm	公差 Tolerance mm
1/2"	21.34	±0.1	2.77	0.51	3.73	0.51
3/4"	26.67	±0.1	2.87	0.51	3.91	0.51
1"	33.4	±0.13	3.38	0.51	4.55	0.53
1 1/4"	42.16	±0.13	3.56	0.51	4.85	0.58
1 1/2"	48.26	±0.15	3.68	0.51	5.08	0.61
2"	60.32	±0.15	3.91	0.51	5.54	0.66
2 1/2"	73.02	±0.18	5.16	0.61	7.01	0.84
3"	88.9	±0.20	5.49	0.66	7.62	0.91
4"	114.3	±0.23	6.02	0.71	8.56	1.02
5"	141.3	±0.25	6.55	0.79	9.52	1.14
6"	168.28	±0.28	7.11	0.86	10.97	1.32
8"	219.08	±0.38	8.18	0.99	12.70	1.52
10"	273.05	±0.38	9.27	1.12	15.06	1.80
12"	323.85	±0.38	10.31	1.24	17.45	2.08
14"	355.6	±0.38	11.10	1.35	19.05	2.29
16"	406.4	±0.48	12.70	1.52	21.41	2.57
18"	457.2	±0.48	14.27	1.70	23.80	2.84
20"	508	±0.58	15.06	1.80	26.19	3.15
24"	609.6	±0.79	17.45	2.08	30.94	3.71

List of Standards of PVC-U/PVC-C Pipes and Fittings

PVC-U/PVC-C 管材管件执行标准一览表

种类 Type	执行标准 Product Standards
PVC-U 工业管件（国标）(DIN,ISO,GB/T) PVC-U Fittings For Industry	GB/T 4219.2-2015
PVC-U 牙口式美标管件 (ASTM)Threaded Type PVC-U Fittings	ASTM D2464
PVC-U 承插式美标管件 (ASTM)Socket Type PVC-U Fittings	ASTM D2467
PVC-C 工业管件（国标）(DIN,ISO,GB/T) PVC-C Fittings For Industry	GB/T 18998.3-2003
PVC-C 牙口式美标管件 (ASTM)Threaded Type PVC-C Fittings	ASTM F437
PVC-C 承插式美标管件 (ASTM)Socket Type PVC-C Fittings	ASTM F439
PVC-U 工业管材（国标）(DIN,ISO,GB/T) PVC-U Pipes For Industry	GB/T 4219.1-2008
PVC-U 美标 管材 (ASTM) PVC-U Pipes	ASTM D 1785
PVC-C 工业管材（国标）(DIN,ISO,GB/T) PVC-C Pipes For Industry	GB/T 18998.2-2003
PVC-C 美标管材 (ASTM) PVC-C Pipes	ASTM F441

Standards of PVC-U Material Testing

PVC-U 材料试验标准

指标名称 Item	单位 Unit	指标 Approval Standard	试验方法 Test Method
密度 Density	kg/m³	1350-1460	CB/T 1033.1-2008 方法 A: 浸渍法
维卡软化温度（管材） Vicat Softening Temperature(pipe)	°C	≥80	GB/T 8802
维卡软化温度（管件） Vika softening temperature (pipe fittings)	°C	≥74	GB/T 8802
烘箱试验 Oven test	/	无分层、无开裂 No layering, no cracking	GB/T 8803
纵向回缩率 LongituGB/T 4219.2al Reversion	%	≤5	GB/T 6671-2001 方法 B: 烘箱试验 Method B: oven test
二氯甲烷浸渍试验 Dichloromethane leaching test	/	试样表面无破坏 No damage to the sample surface	GB/T 13526
液压强度试验 Hydraulic strength test	/	无破裂、无渗漏 No crack, no leakage	GB/T 6111
坠落试验 Falling test	/	无破裂、无渗漏 No crack, no leakage	GB/T 8801
落锤冲击性能 Drop weight impact performance	/	TIR<5%	CB/T 14152
悬臂梁冲击强度 Impact strength of cantilever beam	J/m	≥34.7	ASTM D256
拉伸强度 Tensile strength	Mpa	≥48.3	ASTM D638
拉伸模量 Tensile modulus	Mpa	≥2758	ASTM D638
线膨胀系数 Line expansion coefficient	M/M/°C	7x10 ⁻⁵	GB/T 1036

Standards of PVC-C Testing Material

PVC-C 材料试验标准

指标名称 Item	单位 Unit	指标 Approval Standard	试验方法 Test Method
密度 Density	kg/m³	1450-1650	GB/T 1033-1986 方法 A Method A of GB/T 1033-1986
维卡软化温度（管材） Vicat Softening Temperature(Pipes)	°C	≥110	GB/T 8802
维卡软化温度（管件） Vicat Softening Temperature(Fittings)	°C	≥103	GB/T 8802
纵向回缩率 LongituGB/T 4219.2al Reversion	%	≤5	GB/T6671-2001 方法 B Method B of GB/T6671-2001
氯含量（质量百分比） Chlorine Concerntration (Mass Percent)	%	≥60	GB/T 6111
静液压试验 Hydrostatic Test	--	无破裂、无渗漏 No crack, no leakage	ISO 1167
静液压状态下热稳定试验 Hydrostatic Reheat Test	--	无破裂、无渗漏 No crack, no leakage	ISO 1167
落锤冲击试验 Drop Impact Test	%	TIR≤10%	GB/T 14152
烘箱试验 Oven Test	--	无分层，无开裂 No lamination,no crack	GB/T 8803
弹性模量 Modulus of Elasticity	--	≥2482	ASTM D638
拉伸强度 Tensile Strength	Mpa	≥48.3	ASTM D638
冲击强度 Impact Strength	5J/m	≥80.1	ASTM D256
线膨胀系数 Coefficient of Linear Expansion	m/m°C	7x10 ⁻⁵	--
热传导率 Thermal Conductivity	w/m°C	≤0.13	ASTM C177
阻燃性 Flame Retardant	--	归零 Reset to zero	UL-94


管件 PIPE FITTING



PVC-U/C

ELBOW 90°

90°弯头, PVC-U/C (国标、美标)

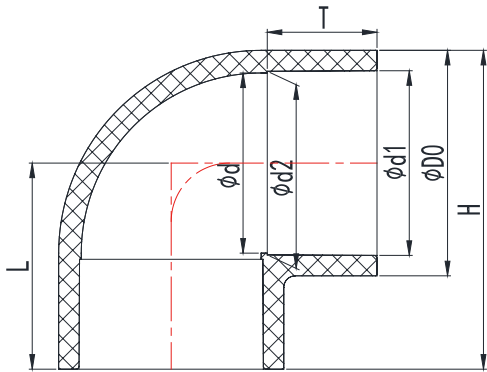

产品参数 (国标 GB/T 4219.2)

SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN	外形尺寸 Dimensions (mm)							公称压力 Nominal Pressure PN(kg/cm²)
	D0	d1	d2	d	T	L	H	
15	26.30	20.30	19.95	18.00	16.20	27.70	40.80	S5(PN20)
20	31.80	25.30	24.95	23.00	18.70	32.70	48.60	S5(PN20)
25	39.90	32.30	31.90	30.00	22.20	39.70	59.60	S5(PN20)
32	49.70	40.40	39.90	38.00	26.20	47.70	72.50	S5(PN20)
40	61.90	50.40	49.90	48.00	31.20	57.70	88.70	S5(PN20)
50	77.90	63.40	62.90	61.00	37.70	70.70	109.70	S5(PN20)
65	91.00	75.40	74.90	70.90	43.70	82.50	128.00	S6.3(PN16)
80	107.40	90.50	89.90	85.90	51.20	97.50	151.20	S6.3(PN16)
100	127.00	110.60	109.90	103.90	61.20	117.50	181.10	S6.3(PN16)
De125	144.30	125.70	124.90	118.90	68.70	132.50	204.70	S6.3(PN16)
125	162.30	140.80	139.90	133.90	76.20	148.00	229.10	S6.3(PN16)
150	184.60	160.80	159.90	153.50	86.20	168.50	260.80	S6.3(PN16)
De180	202.60	180.90	179.90	178.50	97.00	190.00	291.30	S6.3(PN16)
De200	230.50	201.00	199.90	193.50	106.20	208.00	323.30	S6.3(PN16)
200	259.40	226.20	224.90	216.90	119.10	233.60	363.20	S6.3(PN16)
De250	287.90	251.30	249.90	241.90	131.65	258.50	402.50	S8(PN16)
250	314.80	281.50	279.90	278.00	147.00	291.00	448.40	S8(PN16)
300	358.20	316.70	314.90	306.90	164.30	323.00	502.10	S8(PN16)
350	394.00	356.80	355.00	331.50	184.00	375.75	576.00	S8(PN16)
400	450.00	402.00	400.00	363.80	204.20	413.50	657.50	S8(PN16)
500	540.50	503.00	500.00	469.00	256.00	515.00	784.75	PN6
600	668.50	633.00	630.00	591.80	321.00	645.00	978.75	PN6

产品参数 (美标 SCH80)


SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size (* ")	外形尺寸 Dimensions (mm)						
	D0	d1	d2	d	T	L	H
1/2"	30.50	21.54	21.23	17.00	23.22	36.25	51.50
3/4"	36.90	26.87	26.57	22.50	26.40	41.40	59.85
1"	44.70	33.66	33.27	29.00	29.57	47.10	69.45
1-1/4"	54.00	42.42	42.04	38.00	32.75	55.75	82.75
1-1/2"	60.60	48.56	48.11	43.00	35.93	61.95	92.25
2"	73.10	60.63	60.17	55.00	39.10	70.85	107.40
2-1/2"	88.40	73.38	72.85	67.50	45.45	84.50	128.70
3"	105.30	89.31	88.70	83.00	48.63	97.63	149.30
4"	132.00	114.76	114.07	106.00	58.15	117.25	183.25
5"	161.90	141.81	141.04	133.00	67.68	143.50	224.45
6"	190.90	168.83	168.00	160.00	77.20	166.25	261.70
8"	245.90	219.84	218.69	208.00	102.60	216.30	340.55
10"	305.80	273.81	272.67	262.50	128.00	278.00	430.90
12"	361.60	324.60	323.47	288.50	153.40	328.50	509.70
14"	394.11	355.94	354.33	331.50	200.00	375.75	576.00
16"	450.00	407.19	405.33	363.80	230.66	431.50	657.50
20"	540.50	511.00	508.00	469.00	236.00	515.00	784.75
24"	668.50	612.60	609.60	591.80	306.00	645.00	978.75

PVC-U/C

ELBOW 45°

45°弯头，PVC-U/C（国标，美标）

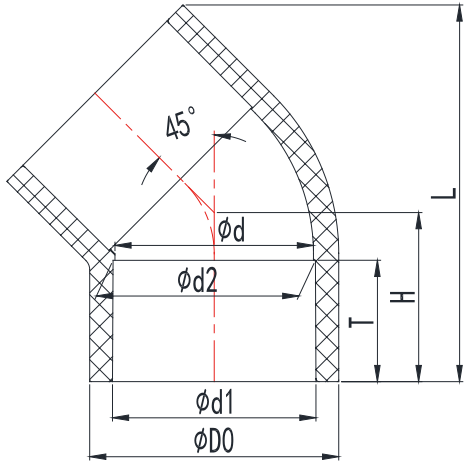

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN	外形尺寸 Dimensions（mm）							公称压力 Nominal Pressure PN(kg/cm²)
	D0	d1	d2	d	T	H	L	
15	26.30	20.30	19.95	18.00	16.20	22.10	46.90	S5(PN20)
20	31.80	25.30	24.95	23.00	18.70	25.70	54.90	S5(PN20)
25	38.60	32.30	31.90	30.00	22.20	30.60	66.20	S5(PN20)
32	49.70	40.40	39.90	38.00	26.20	36.30	79.30	S5(PN20)
40	61.90	50.40	49.90	48.00	31.20	43.30	95.70	S5(PN20)
50	77.50	63.40	62.90	61.00	37.70	52.50	116.90	S5(PN20)
65	91.20	75.40	74.90	70.90	43.70	64.60	142.50	S6.3(PN16)
80	107.60	90.50	89.90	85.90	51.20	75.60	166.90	S6.3(PN16)
100	127.00	110.60	109.90	103.90	61.20	89.20	197.60	S6.3(PN16)
De125	144.30	125.70	124.90	118.90	68.70	100.70	222.90	S6.3(PN16)
125	161.60	140.80	139.90	133.90	76.20	112.40	248.90	S6.3(PN16)
150	184.60	160.80	159.90	153.90	86.20	126.90	281.90	S6.3(PN16)
De180	202.60	180.90	179.90	178.50	97.00	137.90	307.00	S6.3(PN16)
De200	230.50	201.00	199.90	193.50	106.20	157.10	349.50	S6.3(PN16)
200	259.40	226.20	224.90	216.90	119.10	175.70	391.50	S6.3(PN16)
De250	287.90	251.30	249.90	241.90	131.65	193.30	432.20	S8(PN16)
250	314.80	281.50	279.90	278.00	147.00	209.60	469.10	S8(PN16)
300	358.20	316.70	314.90	306.90	164.30	242.80	541.20	S8(PN16)
350	394.11	356.80	355.00	331.50	184.00	270.94	602.20	S8(PN16)
400	450.00	402.00	400.00	369.80	363.80	306.81	662.20	S8(PN16)
500	540.50	503.00	500.00	469.00	256.00	377.00	834.00	PN6
600	668.50	633.00	630.00	591.80	321.00	471.00	1040.00	PN6

产品参数（美标 SCH80）


SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size (*")	外形尺寸 Dimensions（mm）					
	D0	d1	d2	d	T	H
1/2"	30.50	21.54	21.23	17.00	23.22	29.72
3/4"	35.27	26.87	26.57	22.50	26.40	34.40
1"	43.66	33.66	33.27	29.00	29.57	37.58
1-1/4"	53.02	42.42	42.04	38.00	32.75	42.75
1-1/2"	59.86	48.56	48.11	43.00	35.93	47.93
2"	72.22	60.63	60.17	55.00	39.10	55.10
2-1/2"	88.00	73.38	72.85	67.50	45.45	63.50
3"	105.30	89.31	88.70	83.00	48.63	68.63
4"	132.00	114.76	114.07	106.00	58.15	84.15
5"	161.90	141.81	141.04	133.00	67.68	104.55
6"	190.90	168.83	168.00	160.00	77.20	122.20
8"	245.90	219.84	218.69	208.00	102.60	153.80
10"	305.20	273.80	272.67	262.50	128.00	188.00
12"	358.15	324.60	323.47	311.00	164.30	242.80
14"	394.11	355.94	354.33	331.50	200.00	270.94
16"	450.00	407.19	405.33	363.80	230.66	306.81
20"	540.50	511.00	508.00	469.00	236.00	377.00
24"	668.50	612.60	609.60	591.80	306.00	471.00

PVC-U/C

EQUAL TEE

正三通，PVC-U/C（国标，美标）

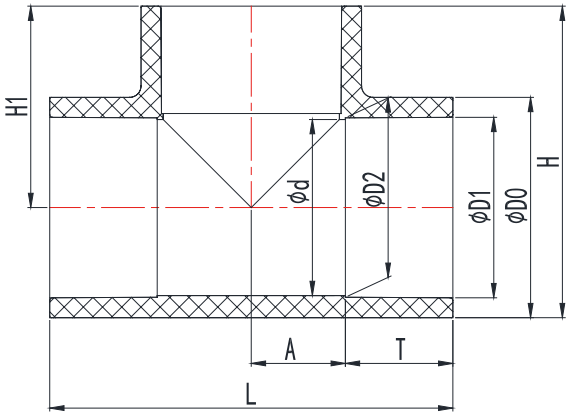

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS(DIN,ISO,GB/T)


尺寸 Size DN	外形尺寸 Dimensions（mm）								公称压力 Nominal Pressure PN(kg/cm²)
	D0	D1	D2	d	T	L	H1	H	
15	26.30	20.30	19.95	18.00	16.20	55.40	27.70	40.85	S5(PN20)
20	31.80	25.30	24.95	23.00	18.70	65.40	32.70	48.60	S5(PN20)
25	39.90	32.30	31.90	30.00	22.20	79.40	39.70	59.65	S5(PN20)
32	49.70	40.40	39.90	38.00	26.20	97.20	47.70	72.55	S5(PN20)
40	61.90	50.40	49.90	48.00	31.20	114.50	57.70	88.65	S5(PN20)
50	77.90	63.40	62.90	61.00	37.70	141.00	70.70	109.65	S5(PN20)
65	91.20	75.40	74.90	70.90	43.70	165.00	82.50	128.10	S6.3(PN16)
80	107.60	90.50	89.90	85.90	51.20	194.00	97.50	151.30	S6.3(PN16)
100	127.00	110.60	109.90	103.90	61.20	234.00	117.50	181.00	S6.3(PN16)
De125	144.30	125.70	124.90	118.90	68.70	264.00	132.50	204.65	S6.3(PN16)
125	161.60	140.80	139.90	133.90	76.20	296.00	148.00	228.80	S6.3(PN16)
150	184.60	160.80	159.90	153.90	86.20	334.00	168.00	260.30	S6.3(PN16)
De180	202.60	180.90	179.90	178.50	97.00	380.00	190.00	291.30	S6.3(PN16)
De200	230.50	201.00	199.90	193.50	106.20	415.00	208.00	323.25	S6.3(PN16)
200	259.40	226.20	224.90	216.90	119.10	463.50	233.50	363.20	S6.3(PN16)
De250	287.90	251.30	249.90	241.90	131.65	516.00	258.50	402.45	S8(PN16)
250	314.80	281.50	279.90	278.00	147.00	581.50	291.00	448.40	S8(PN16)
300	358.20	316.70	314.90	306.90	164.30	645.00	323.00	502.10	S8(PN16)
350	394.11	356.80	355.00	331.50	184.00	742.20	371.10	571.6	S8(PN16)
400	450.00	402.00	400.00	363.80	204.20	828.00	414.00	640.5	S8(PN16)
500	540.50	503.00	500.00	469.00	256.00	1029.00	514.50	784.75	PN6
600	668.50	633.00	630.00	591.80	321.00	1289.00	644.50	978.75	PN6

产品参数（美标 SCH80）

SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size （"）	外形尺寸 Dimensions（mm）							
	D0	D1	D2	d	T	H1	H	L
1/2"	30.14	21.54	21.23	17.00	23.22	36.25	51.50	72.50
3/4"	35.87	26.87	26.57	22.50	26.40	41.40	59.85	82.80
1"	44.30	33.66	33.27	29.00	29.57	47.10	69.45	94.20
1-1/4"	53.42	42.42	42.04	38.00	32.75	55.75	82.75	111.50
1-1/2"	60.40	48.56	48.11	43.00	35.93	62.00	92.25	124.00
2"	73.10	60.63	60.17	55.00	39.10	70.85	107.40	141.70
2-1/2"	88.40	73.38	72.85	67.50	45.45	83.28	128.70	166.55
3"	105.70	89.31	88.70	83.00	48.63	97.08	149.30	194.15
4"	132.50	114.76	114.07	106.00	58.15	117.25	183.25	234.50
5"	161.60	141.81	141.04	133.00	67.68	142.80	227.95	285.60
6"	192.00	168.83	168.00	160.00	77.20	166.25	261.70	332.50
8"	246.50	219.84	218.69	208.00	102.60	217.60	340.55	435.20
10"	305.80	273.81	272.67	262.50	128.00	278.00	430.90	556.00
12"	361.60	324.60	323.47	313.00	153.40	328.50	509.70	656.80
14"	394.11	355.94	354.33	331.50	200.00	371.10	571.60	742.20
16"	450.00	401.5	400	204.2	230.66	414.00	625	828.00
20"	540.50	511.00	508.00	469.00	236.00	514.50	784.75	1029.00
24"	668.50	612.60	609.60	591.80	306.00	644.50	978.75	1289.00

PVC-U/C
 REDUCING TEE
 异三通，PVC-U/C（国标，美标）

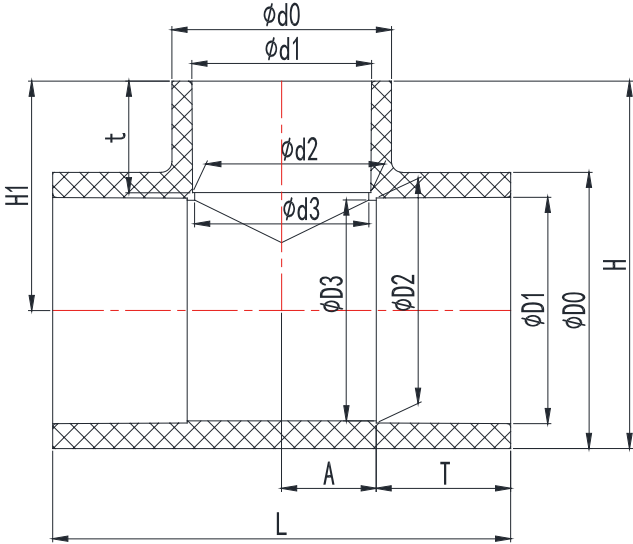

产品参数（国标 GB/T 4219.2） SPECIFICATIONS(DIN,ISO,GB/T)


尺寸 Size DN(De)	外形尺寸 Dimensions（mm）													公称压力 Nominal Pressure PN(kg/cm²)
	D0	D1	D2	D3	d0	d1	d2	d3	T	t	H1	H	L	
20X15(25*20)	31.80	25.25	24.95	23.00	26.30	20.30	19.95	18.00	18.70	16.20	30.20	46.1	60.40	S5(PN20)
25X15(32*20)	39.90	32.30	31.90	30.00	26.50	20.30	19.95	18.00	22.20	16.20	34.40	54.35	69.00	S5(PN20)
25X20(32*25)	39.90	32.30	31.90	30.00	31.80	25.30	24.95	23.00	22.20	16.20	36.20	56.15	72.10	S5(PN20)
32X15(40*20)	49.70	40.35	39.90	38.00	26.40	20.30	19.95	18.00	26.20	16.20	39.00	63.85	75.50	S5(PN20)
32X20(40*25)	49.70	40.35	39.90	38.00	31.10	25.30	24.95	23.00	26.20	18.70	40.70	65.55	80.60	S5(PN20)
32X25(40*32)	49.70	40.35	39.90	38.00	39.70	32.30	31.90	30.00	26.20	22.20	43.70	68.55	87.40	S5(PN20)
40X15(50*20)	61.90	50.35	49.90	48.00	26.30	20.30	19.95	18.00	31.20	16.20	45.20	76.15	85.40	S5(PN20)
40X20(50*25)	61.90	50.35	49.90	48.00	31.80	25.30	24.95	23.00	31.20	18.70	46.70	77.65	90.20	S5(PN20)
40X25(50*32)	61.90	50.35	49.90	48.00	39.90	32.30	31.90	30.00	31.20	22.20	49.50	80.45	97.40	S5(PN20)
40X32(50*40)	61.90	50.35	49.90	48.00	49.30	40.35	39.90	38.00	31.20	26.20	52.70	83.65	65.25	S5(PN20)
50X15(63*20)	77.90	63.40	62.90	61.00	26.60	20.30	19.95	18.00	37.70	16.20	53.20	92.15	98.25	S5(PN20)
50X20(63*25)	77.90	63.40	62.90	61.00	31.80	25.30	24.95	23.00	37.70	18.70	54.70	93.65	103.10	S5(PN20)
50X25(63*32)	77.90	63.40	62.90	61.00	40.00	32.30	31.90	30.00	37.70	22.20	57.20	96.15	110.40	S5(PN20)
50X32(63*40)	77.90	63.40	62.90	61.00	49.70	40.35	39.90	38.00	37.70	26.20	59.20	98.15	118.40	S5(PN20)
50X40(63*50)	77.90	63.40	62.90	61.00	61.50	50.35	49.90	48.00	37.70	31.20	64.20	103.15	127.70	S5(PN20)
65X15(75*20)	91.20	75.40	74.90	70.90	26.30	20.30	19.95	18.00	43.70	16.20	55.20	100.8	140.00	S6.3(PN16)
65X20(75*25)	91.20	75.40	74.90	70.90	31.80	25.30	24.95	23.00	43.70	18.70	57.70	103.3	140.00	S6.3(PN16)
65X25(75*32)	91.20	75.40	74.90	70.90	39.90	32.30	31.90	23.00	43.70	22.20	61.20	106.8	140.30	S6.3(PN16)
65X32(75*40)	91.20	75.40	74.90	70.90	49.70	40.35	39.90	30.00	43.70	26.20	65.20	110.8	140.00	S6.3(PN16)
65X40(75*50)	91.20	75.40	74.90	70.90	61.50	50.35	49.90	48.00	43.70	31.20	70.20	115.8	140.00	S6.3(PN16)
65X50(75*63)	91.20	75.40	74.90	70.90	77.30	63.40	62.90	61.00	43.70	37.70	77.30	122.9	152.20	S6.3(PN16)
80X20(90*25)	107.60	90.50	89.90	85.90	31.80	25.30	24.95	23.00	51.20	18.70	65.20	119	167.80	S6.3(PN16)
80X25(90*32)	107.60	90.50	89.90	85.90	39.50	32.30	31.90	23.00	51.20	22.20	68.70	122.5	168.20	S6.3(PN16)
80X32(90*40)	107.60	90.50	89.90	85.90	49.50	40.35	39.90	38.00	51.20	26.20	72.70	126.5	168.20	S6.3(PN16)
80X40(90*50)	107.60	90.50	89.90	85.90	61.90	50.35	49.90	48.00	51.20	31.20	77.70	131.5	168.00	S6.3(PN16)
80X50(90*63)	107.60	90.50	89.90	85.90	77.30	63.40	62.90	61.00	51.20	37.70	84.20	138	168.20	S6.3(PN16)
80X65(90*75)	107.60	90.50	89.90	85.90	91.20	75.40	74.90	70.90	51.20	43.70	92.30	146.1	180.70	S6.3(PN16)
100X20(110*25)	127.00	110.60	109.90	103.90	31.80	25.30	24.95	23.00	61.20	18.70	74.20	137.7	189.00	S6.3(PN16)
100X25(110*32)	127.00	110.60	109.90	103.90	40.10	32.30	31.90	23.00	61.20	22.20	77.70	141.2	190.00	S6.3(PN16)
100X32(110*40)	127.00	110.60	109.90	103.90	49.70	40.35	39.90	38.00	61.20	26.20	81.70	145.2	190.50	S6.3(PN16)
100X40(110*50)	127.00	110.60	109.90	103.90	61.90	50.35	49.90	48.00	61.20	31.20	86.70	150.2	189.00	S6.3(PN16)
100X50(110*63)	127.00	110.60	109.90	103.90	77.30	63.40	62.90	61.00	61.20	37.70	93.20	156.7	190.00	S6.3(PN16)
100X65(110*75)	127.00	110.60	109.90	103.90	91.20	75.40	74.90	70.90	61.20	43.70	99.00	162.5	201.50	S6.3(PN16)
100X80(110*90)	127.00	110.60	109.90	103.90	107.60	90.50	89.90	85.90	61.20	51.20	110.35	173.85	214.80	S6.3(PN16)
De125*110	144.30	125.70	124.90	118.90	127.00	110.60	109.90	103.90	68.70	61.20	127.80	199.95	251.00	S6.3(PN16)
125X40(140*50)	161.60	140.75	139.90	133.90	61.60	50.35	49.90	48.00	76.20	31.20	101.70	182.5	247.40	S6.3(PN16)
125X50(140*63)	161.60	140.75	139.90	133.90	77.30	63.40	62.90	61.00	76.20	37.70	108.20	189	247.00	S6.3(PN16)
125X65(140*75)	161.60	140.75	139.90	133.90	91.20	75.40	74.90	70.90	76.20	43.70	114.00	194.8	248.00	S6.3(PN16)
125X80(140*90)	161.60	140.75	139.90	133.90	107.40	90.50	89.90	85.90	76.20	51.20	121.50	202.3	247.00	S6.3(PN16)
125X100(140*110)	161.60	140.75	139.90	133.90	127.00	110.60	109.90	103.90	76.20	61.20	136.70	217.5	266.40	S6.3(PN16)
De140*125	161.60	140.75	139.90	133.90	144.30	125.70	124.90	118.90	76.20	68.70	142.40	223.2	280.50	S6.3(PN16)
150X50(160*63)	184.60	160.80	159.90	153.90	77.70	63.40	62.90	61.00	86.20	37.70	118.20	210.5	286.00	S6.3(PN16)
150X65(160*75)	184.60	160.80	159.90	153.90	89.90	75.40	74.90	70.90	86.20	43.70	124.00	216.3	285.00	S6.3(PN16)
150X80(160*90)	184.60	160.80	159.90	153.90	107.60	90.50	89.90	85.90	86.20	51.20	131.50	223.8	285.50	S6.3(PN16)
150X100(160*110)	184.60	160.80	159.90	153.90	127.30	110.60	109.90	103.90	86.20	61.20	142.50	234.8	286.00	S6.3(PN16)
150X125(160*140)	184.60	160.80	159.90	153.90	161.80	140.75	139.90	133.90	86.20	76.20	161.50	253.8	315.50	S6.3(PN16)
De180*160	202.60	180.80	180.10	178.50	184.60	160.80	159.90	153.90	97.00	86.20	180.00	281.3	326.00	S6.3(PN16)
De200*90	230.50	201.00	199.90	193.50	107.70	90.50	89.90	85.90	106.20	51.20	151.50	266.75	356.50	S6.3(PN16)
De200*110	230.50	201.00	199.90	193.50	127.50	110.60	109.90	103.90	106.20	61.20	162.50	277.75	357.00	S6.3(PN16)
De200*140	230.50	201.00	199.90	193.50	162.20	140.75	139.90	133.90	106.20	76.20	178.00	293.25	356.50	S6.3(PN16)
De200*160	230.50	201.00	199.90	193.50	184.60	160.80	159.90	153.90	106.20	86.20	197.50	312.75	415.50	S6.3(PN16)
200X50(225*63)	259.40	226.20	224.90	216.90	77.30	63.40	62.90	61.00	119.10	37.70	149.70	279.4	384.00	S6.3(PN16)
200X65(225*75)	259.40	226.20	224.90	216.90	91.20	75.40	74.90	70.90	119.10	43.70	155.50	285.2	384.00	S6.3(PN16)

200X80(225*90)	259.40	226.20	224.90	216.90	107.60	90.50	89.90	85.90	119.10	51.20	163.00	292.7	384.00	S6.3(PN16)
200X100(225*110)	259.40	226.20	224.90	216.90	127.00	110.60	109.90	103.90	119.10	61.20	174.00	303.7	384.00	S6.3(PN16)
200X125(225*140)	259.40	226.20	224.90	216.90	161.90	140.75	139.90	133.90	119.10	76.20	189.50	319.2	384.00	S6.3(PN16)
200X150(225*160)	259.40	226.20	224.90	216.90	185.00	160.80	159.90	153.90	119.10	86.20	209.70	339.4	403.00	S6.3(PN16)
De225*200	259.40	226.20	224.90	216.90	230.50	201.00	199.90	193.50	119.10	106.20	231.50	361.2	384.00	S6.3(PN16)
De250*63	281.10	251.30	249.90	241.90	77.30	63.40	62.90	61.00	132.00	37.70	162.00	302.55	429.50	S8(PN16)
De250*75	281.10	251.30	249.90	241.90	91.20	75.40	74.90	70.90	132.00	43.70	167.80	308.35	429.50	S8(PN16)
De250*90	281.10	251.30	249.90	241.90	107.80	90.50	89.90	85.90	132.00	51.20	175.30	315.85	429.50	S8(PN16)
De250*110	281.10	251.30	249.90	241.90	127.00	110.60	109.90	103.90	132.00	61.20	186.30	326.85	429.50	S8(PN16)
De250*140	281.10	251.30	249.90	241.90	161.60	140.75	139.90	153.90	132.00	76.20	201.80	342.35	429.50	S8(PN16)
De250*160	281.10	251.30	249.90	241.90	184.60	160.80	159.90	178.50	132.00	86.20	211.80	352.35	429.50	S8(PN16)
De250*225	287.90	251.30	249.90	241.90	259.40	226.20	224.90	218.90	132.00	119.10	254.00	397.95	429.50	S8(PN16)
De280*225	314.80	281.50	279.90	278.00	259.20	226.20	224.90	218.90	147.00	132.00	276.00	433.40	526.50	S8(PN16)
300X80(315*90)	354.70	316.70	314.90	306.90	107.60	90.50	89.90	85.90	164.30	51.20	198.70	376.05	445.90	S8(PN16)
300X100(315*110)	354.70	316.70	314.90	306.90	127.00	110.60	109.90	103.90	164.30	61.20	209.70	387.05	600.10	S8(PN16)
300X125(315*140)	354.70	316.70	314.90	306.90	161.60	140.75	139.90	133.90	164.30	76.20	225.20	402.55	600.10	S8(PN16)
300X150(315*160)	354.70	316.70	314.90	306.90	184.60	160.80	159.90	153.90	164.30	86.20	235.20	412.55	600.10	S8(PN16)
De315*200	354.70	316.70	314.90	306.90	230.50	201.00	199.90	193.50	164.30	106.20	268.50	445.85	538.00	S8(PN16)
300X200(315*225)	354.70	316.70	314.90	306.90	259.40	226.20	224.90	220.90	164.30	119.10	269.20	446.55	600.10	S8(PN16)
De315*250	354.70	316.70	314.90	306.90	288.60	251.30	249.90	241.90	164.30	132.00	282.00	459.35	644.00	S8(PN16)
300X250(315*280)	391.00	316.70	314.90	306.90	314.50	281.50	279.90	278.00	164.30	147.00	321.50	517.00	647.00	S8(PN16)
De355*200	388.00	356.80	355.00	326.00	230.50	201.00	199.90	193.50	184.30	106.20	285.50	478.00	590.50	PN6
350X225(355*250)	388.00	356.80	355.00	326.00	281.10	251.30	249.90	241.90	184.30	132.00	311.50	504.60	639.00	PN6
350X300(355*315)	388.00	356.80	400.00	326.00	344.20	316.70	314.90	306.90	184.30	164.30	350.60	544.60	693.00	PN6
De400*200	432.70	401.60	400.00	398.50	220.90	200.90	199.85	197.00	107.00	208.00	318.60	534.95	623.00	PN6
400X225(400*250)	432.40	401.60	400.00	398.50	273.50	251.15	249.41	247.00	132.00	208.00	342.80	559.00	672.00	PN6
400X300(400*315)	432.70	401.60	400.00	398.50	344.50	316.55	315.05	312.00	165.00	208.00	370.00	586.35	752.00	PN6
De500*200	540.50	502.00	499.00	469.00	228.90	201.00	199.50	168.70	256.00	106.00	364.70	635.00	728.70	PN6
DN500X300(500X315)	540.50	502.00	499.00	469.00	346.60	316.50	314.50	284.00	256.00	163.50	422.20	692.50	844.00	PN6

产品参数（美标 SCH80） SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size (英寸)	外形尺寸 Dimensions (mm)											
	D0	D1	D2	D3	d0	d1	d2	d3	t	T	H	L
3/4"×1/2"	35.87	26.87	26.57	22.50	30.14	21.54	21.23	17.00	23.22	26.40	56.50	82.80
1"×1/2"	44.30	33.66	33.27	29.00	30.14	21.54	21.23	17.00	23.22	29.57	63.90	94.20
1"×3/4"	44.30	33.66	33.27	29.00	35.87	26.87	26.57	22.50	26.40	29.57	66.80	94.20
1-1/4"×3/4"	53.42	42.42	42.04	38.00	35.87	26.87	26.57	22.50	26.40	32.75	75.80	111.50
1-1/4"×1"	53.42	42.42	42.04	38.00	44.30	33.66	33.27	29.00	29.57	32.75	78.30	111.50
1-1/2"×1"	60.40	48.56	48.11	43.00	44.30	33.66	33.27	29.00	29.57	35.93	84.60	124.00
1-1/2"×1-1/4"	60.40	48.56	48.11	43.00	53.42	42.42	42.04	38.00	32.75	35.93	88.70	124.00
2"×1-1/4"	73.10	60.63	60.17	55.00	53.42	42.42	42.04	38.00	32.75	39.10	100.60	141.70
2"×1-1/2"	73.10	60.63	60.17	55.00	60.40	48.56	48.11	43.00	35.93	39.10	104.00	141.70
2-1/2"×1-1/2"	88.40	73.38	72.85	67.50	60.40	48.56	48.11	43.00	35.93	45.45	117.90	169.00
2-1/2"×2"	88.40	73.38	72.85	67.50	73.10	60.63	60.17	55.00	39.10	45.45	121.30	169.00
3"×2"	105.70	89.31	88.70	83.00	73.10	60.63	60.17	55.00	39.10	48.63	137.50	194.15
3"×2-1/2"	105.70	89.31	88.70	83.00	88.40	73.38	72.85	67.50	45.45	48.63	144.90	194.15
4"×2-1/2"	132.50	114.76	114.07	106.00	88.40	73.38	72.85	67.50	45.45	58.15	169.30	234.50
4"×3"	132.50	114.76	114.07	106.00	105.70	89.31	88.70	83.00	48.63	58.15	173.90	234.50
5"×2"	161.60	141.81	141.04	133.00	72.70	60.63	60.17	55.00	39.10	67.68	185.90	285.60
6"×2"	192.00	168.83	168.00	160.00	73.10	60.63	60.17	55.00	39.10	77.20	224.90	332.50
6"×4"	192.00	168.83	168.00	160.00	132.50	114.76	114.07	106.00	58.15	77.20	240.30	332.50
8"×4"	246.50	219.84	218.69	208.00	132.50	114.76	114.07	106.00	58.15	102.60	286.00	435.20
8"×6"	246.50	219.84	218.69	208.00	192.00	168.83	168.00	160.00	77.20	102.60	313.50	435.20
10"×6"	305.80	273.81	272.67	262.50	192.00	168.83	168.00	160.00	77.20	128.00	370.40	446.60
10"×8"	305.80	273.81	272.67	262.50	246.50	219.84	218.69	208.00	102.60	128.00	297.90	496.50
12"×8"	361.60	324.60	323.47	313.00	246.50	219.84	218.69	208.00	102.60	153.40	450.10	583.00
12"×10"	361.60	324.60	323.47	313.00	305.80	273.81	272.67	262.50	128.00	153.40	477.60	656.80
20"X12"	540.50	511.00	508.00	469.00	346.60	324.70	323.20	284.00	236.00	163.70	692.50	844.00

PVC-U/C COPPER THREADED
 ELBOW 90°
 铜内丝 90°弯头，PVC-U/C（国标）

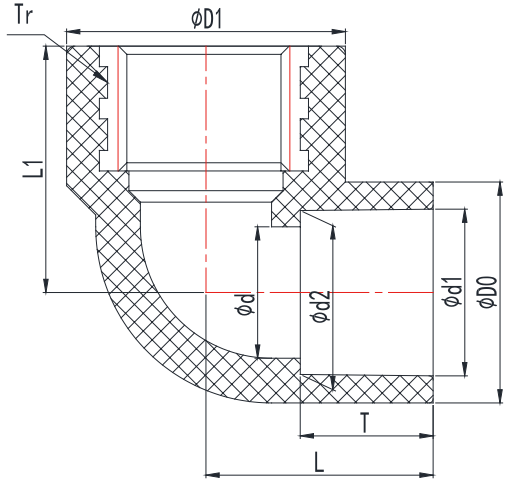


产品参数（国标 GB/T 4219.2） SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions (mm)									公称压力 Nominal Pressure PN(kg/cm²)
	D0	D1	d1	d2	d	T	L1	L	Tr 螺纹 PT	
15(20)	26.90	34.00	20.30	19.95	16.00	16.20	27.70	43.50	1/2"	S5(PN20)
20(25)	32.60	39.50	25.30	24.95	21.00	18.70	32.70	50.30	3/4"	S5(PN20)
25(32)	40.10	46.50	32.30	31.90	28.00	22.20	39.70	60.30	1"	S5(PN20)

PVC-U/C

EQUAL CROSS

正四通，PVC-U/C（国标，美标）

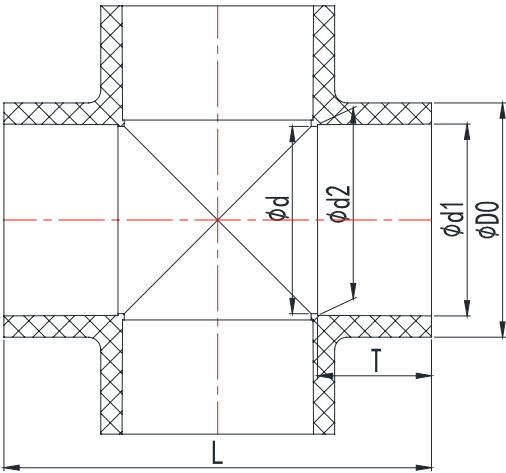

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN	外形尺寸 Dimensions（mm）						公称压力 Nominal Pressure PN(kg/cm²)
	D0	D1	D2	d	T	L	
15	26.30	20.30	19.95	18.00	16.20	55.40	S5(PN20)
20	31.80	25.30	24.95	21.00	18.70	65.40	S5(PN20)
25	39.90	32.30	31.90	28.00	22.20	79.40	S5(PN20)
32	49.50	40.35	39.90	36.00	26.20	95.40	S5(PN20)
40	61.50	50.35	49.90	46.00	31.20	115.40	S5(PN20)
50	77.40	63.40	62.90	59.00	37.70	141.00	S5(PN20)
65	91.20	75.40	74.90	70.90	43.70	165.00	S6.3(PN16)
80	107.60	90.50	89.90	85.90	51.20	194.50	S6.3(PN16)
100	127.00	110.60	109.90	103.90	61.20	234.50	S6.3(PN16)
De125	144.30	125.70	124.90	118.90	68.70	263.80	S6.3(PN16)
125	161.60	140.75	139.90	133.90	76.20	295.00	S6.3(PN16)
150	185.30	160.80	159.90	153.90	86.20	336.00	S6.3(PN16)
De200	230.00	201.00	199.90	193.90	106.20	414.00	S6.3(PN16)
200	259.40	226.20	224.90	216.90	119.10	465.00	S6.3(PN16)
De250	287.90	251.30	249.90	241.40	131.65	515.50	S6.3(PN16)
250	314.80	281.20	280.10	276.00	147.00	582.00	S8(PN16)
300	354.00	316.70	314.90	307.00	164.30	643.00	S8(PN16)

产品参数（美标 SCH80）


SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size (*")	外形尺寸 Dimensions（mm）					
	D0	d1	d2	d	T	L
1/2"	29.54	21.54	21.23	17.00	23.22	72.50
3/4"	35.36	26.87	26.57	22.50	26.40	82.80
1"	43.66	33.66	33.27	29.00	29.57	94.20
1-1/4"	53.02	42.42	42.04	38.00	32.75	111.50
1-1/2"	59.86	48.56	48.11	43.00	35.93	124.00
2"	72.23	60.63	60.17	55.00	39.10	143.70
2-1/2"	88.00	73.38	72.85	67.50	45.45	169.00
3"	105.30	89.31	88.70	83.00	48.63	193.26
4"	132.00	114.76	114.07	106.00	58.15	234.50
5"	162.00	141.81	141.04	133.00	67.68	287.00
6"	190.85	168.83	168.00	160.00	77.20	332.50

PVC-U/C

BUSHING

变径（补芯），PVC-U/C（国标，美标）

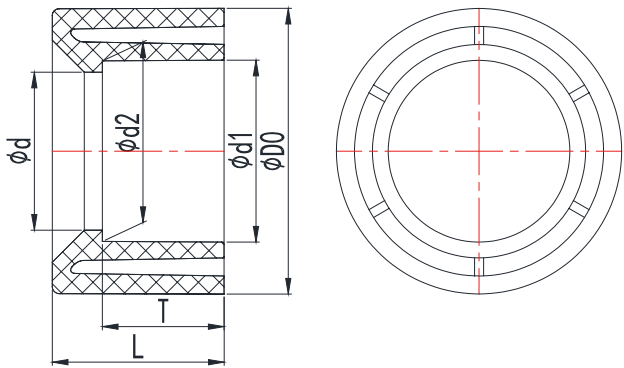

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）					
	D0	d1	d2	d	T	L
20X15(25*20)	25.00	20.30	19.95	16.00	17.00	19.20
25X15(32*20)	32.00	20.30	19.95	16.00	17.00	22.20
25X20(32*25)	32.00	25.30	24.95	21.00	19.50	22.20
32X15(40*20)	40.00	20.30	19.95	16.00	17.00	26.30
32X20(40*25)	40.00	25.30	24.95	21.00	19.50	26.30
32X25(40*32)	40.00	32.30	31.90	27.50	23.00	26.30
40X15(50*20)	50.00	20.30	19.95	16.00	17.00	31.20
40X20(50*25)	50.00	25.30	24.95	21.00	19.50	31.20
40X25(50*32)	50.00	32.30	31.90	27.50	23.00	31.20
40X32(50*40)	50.00	40.35	39.90	35.00	27.00	31.20
50X15(63*20)	63.00	20.30	19.95	16.00	17.00	38.10
50X20(63*25)	63.00	25.30	24.95	21.00	19.50	38.10
50X25(63*32)	63.00	32.30	31.90	27.50	23.00	38.10
50X32(63*40)	63.00	40.35	39.90	35.00	27.00	38.10
50X40(63*50)	63.00	50.35	49.90	45.00	32.00	38.10
65X20(75*25)	75.00	25.30	24.95	21.00	19.50	44.10
65X25(75*32)	75.00	32.30	31.90	27.50	23.00	44.10
65X32(75*40)	75.00	40.35	39.90	35.00	27.00	44.10
65X40(75*50)	75.00	50.35	49.90	45.00	32.00	44.10
65X50(75*63)	75.00	63.40	62.90	56.00	38.50	44.10
80X25(90*32)	90.00	32.30	31.90	27.50	23.00	51.00
80X32(90*40)	90.00	40.35	39.90	35.00	27.00	51.00
80X40(90*50)	90.00	50.35	49.90	45.00	32.00	51.00
80X50(90*63)	90.00	63.40	62.90	56.00	38.50	51.00
80X65(90*75)	90.00	75.40	74.90	67.00	44.50	51.00
100X40(110*50)	110.00	50.35	49.90	45.00	32.00	61.00
100X50(110*63)	110.00	63.40	62.90	56.00	38.50	61.00
100X65(110*75)	110.00	75.40	74.90	67.00	44.50	61.00
100X80(110*90)	110.00	90.50	89.90	80.50	52.00	61.00
De125*110	125.00	110.40	109.90	102.00	62.00	68.70
125X50(140*63)	140.00	63.40	62.90	102.00	62.00	77.00
125X65(140*75)	140.00	75.40	74.90	117.00	68.70	76.20
125X80(140*90)	140.00	90.50	89.90	56.00	38.50	76.20
125X100(140*110)	140.00	110.60	109.90	67.00	44.50	76.20
De140*125	140.00	125.70	124.90	80.50	52.00	76.20
150X50(160*63)	160.00	63.40	62.90	96.00	62.00	86.00
150X65(160*75)	160.00	75.40	74.90	130.00	77.00	86.00
150X80(160*90)	160.00	90.50	89.90	56.00	38.50	86.00
150X100(160*110)	160.00	110.60	109.90	67.00	44.50	86.00
150X125(160*140)	160.00	125.70	139.90	80.50	52.00	86.00
De180*160	180.00	160.80	159.90	150.90	86.20	96.00
De200*160	200.00	160.80	159.90	151.50	85.50	106.50
De200*180	200.00	180.90	179.90	169.70	96.00	106.20
200X100(225*110)	225.00	110.60	109.90	96.00	62.00	118.70
200X125(225*140)	225.00	140.75	139.90	130.00	77.00	118.70
200X150(225*160)	225.00	160.80	159.90	150.50	85.50	118.70
De225*200	225.00	201.00	199.90	188.80	106.20	118.70
De250*110	250.00	110.60	109.90	96.00	62.00	131.20
De250*160	250.00	160.80	159.90	150.50	85.50	131.20
De250*200	250.00	201.00	199.90	188.80	106.20	131.20
De250*225	250.00	226.20	224.90	210.80	119.10	131.20
250X200(280*225)	280.00	226.20	224.90	208.80	119.10	146.20

300X100(315*110)	315.00	110.60	109.90	96.00	62.00	163.70
300X150(315*160)	315.00	160.80	159.90	150.50	85.50	163.70
De315*200	315.00	201.00	199.90	188.80	106.20	163.70
300X200(315*225)	315.00	226.20	224.90	210.80	119.10	163.70
De315*250	315.00	251.15	249.90	239.00	131.65	163.70
300X250(315*280)	315.00	281.50	279.90	263.50	146.20	163.70
De355*200	355.00	201.00	199.90	188.80	106.20	183.70
350X200(355*225)	355.00	226.20	224.90	210.80	119.10	183.70
De355*250	355.00	251.15	249.90	239.00	131.65	183.70
350X300(355*315)	355.00	316.55	314.90	305.00	164.30	183.70
De400*200	400.00	201.00	199.90	188.80	106.20	206.20
400X200(400*225)	400.00	226.20	224.90	210.80	119.10	206.20
De400*250	400.00	251.15	249.90	239.00	131.65	206.20
400X300(400*315)	400.00	316.60	314.90	305.00	164.30	206.20
400X350(400*355)	400.00	356.70	354.90	345.00	183.70	206.20

产品参数（美标 SCH80）


SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size (英寸)	外形尺寸 Dimensions (mm)						
	D0	d1	d2	d	T	d1	L
1/2"×1/4"	21.34	14.02	13.60	10.00	16.50	23.50	29.00
1/2"×3/8"	21.34	17.45	17.04	12.00	19.50	23.50	29.00
3/4"×1/2"	26.67	21.54	21.23	17.00	23.22	26.40	31.90
1"×3/8"	33.40	17.45	17.04	12.00	19.50	29.58	35.58
1"×1/2"	33.40	21.54	21.23	17.00	23.22	29.58	35.58
1"×3/4"	33.40	26.87	26.57	22.50	26.40	29.58	35.58
1-1/4"×1/2"	42.16	21.54	21.23	17.00	23.22	30.00	36.00
1-1/4"×3/4"	42.16	26.87	26.57	22.50	26.40	30.00	36.00
1-1/4"×1"	42.16	33.66	33.27	29.00	29.57	30.00	36.00
1-1/2"×1/2"	48.26	21.54	21.23	17.00	23.22	35.93	41.93
1-1/2"×3/4"	48.26	26.87	26.57	22.50	26.40	35.93	41.93
1-1/2"×1"	48.26	33.66	33.27	29.00	29.57	35.93	41.93
1-1/2"×1-1/4"	48.26	42.42	42.04	38.00	32.75	35.93	41.93
2"×1/2"	60.33	21.54	21.23	17.00	23.22	39.10	45.10
2"×3/4"	60.33	26.87	26.57	22.50	26.40	39.10	45.10
2"×1"	60.33	33.66	33.27	29.00	29.57	39.10	45.10
2"×1-1/4"	60.33	42.42	42.04	38.00	32.75	39.10	45.10
2"×1-1/2"	60.33	48.56	48.11	43.00	35.93	39.10	45.10
2-1/2"×1-1/2"	70.03	48.56	48.11	43.00	35.93	45.00	51.00
2-1/2"×2"	70.03	60.63	60.17	55.00	39.10	45.00	51.00
3"×1-1/2"	88.90	48.56	48.11	43.00	35.93	49.00	57.00
3"×2"	88.90	60.63	60.17	55.00	39.10	49.00	57.00
3"×2-1/2"	88.90	48.56	48.11	67.50	35.93	49.00	57.00
4"×2"	114.30	60.63	60.17	55.00	39.10	59.00	67.00
4"×2-1/2"	114.30	48.56	48.11	67.50	35.93	59.00	67.00
4"×3"	114.30	89.31	88.70	83.00	48.63	59.00	67.00
5"×4"	141.30	114.76	114.07	106.00	58.15	69.00	79.00
6"×3"	168.30	89.31	88.70	83.00	48.63	78.00	90.00
6"×4"	168.30	114.76	114.07	106.00	58.15	78.00	90.00
6"×5"	168.30	141.81	141.04	133.00	67.68	78.00	90.00
8"×4"	219.10	114.76	114.07	106.00	58.15	103.00	115.00
8"×6"	219.10	168.83	168.00	160.00	77.20	103.00	115.00
10"×3"	273.05	89.31	88.70	83.00	48.63	127.00	148.00
10"×4"	273.05	114.76	114.07	106.00	58.15	127.00	148.00
10"×6"	273.05	168.83	168.00	160.00	77.20	127.00	148.00
10"×8"	273.05	219.84	218.69	208.00	102.60	127.00	148.00
12"×4"	323.85	114.76	114.07	106.00	58.15	151.00	169.00
12"×6"	323.85	168.83	168.00	160.00	77.20	151.00	169.00
12"×8"	323.85	219.84	218.69	208.00	102.60	151.00	169.00
12"×10"	323.85	273.81	272.67	262.50	128.00	151.00	169.00
14"×12"	355.35	324.7	323.2	305	163.7	183.7	169.00
16"×14"	406.3	356.7	354.9	345	183.7	206.2	169.00

PVC-U/C

COPPER THREADED TEE

铜内丝三通，PVC-U/C（国标）

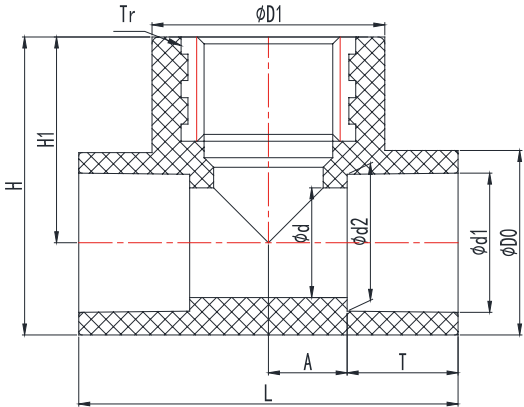

产品参数（国标 GB/T 4219.2）


SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN	外形尺寸 Dimensions (mm)										公称压力 Nominal Pressure PN(kg/cm²)
	D0	D1	d1	d2	d	T	H1	H	L	Tr 螺纹 PT	
15	26.90	34.00	20.30	19.95	16.00	16.20	30.00	43.45	55.40	1/2"	S5(PN20)
20	32.60	39.50	25.30	24.95	21.00	18.70	34.00	50.30	65.40	3/4"	S5(PN20)
25	40.10	46.50	32.30	31.90	28.00	22.20	40.00	60.05	79.40	1"	S5(PN20)

PVC-U/C

REDUCER

异径，PVC-U/C（国标，美标）

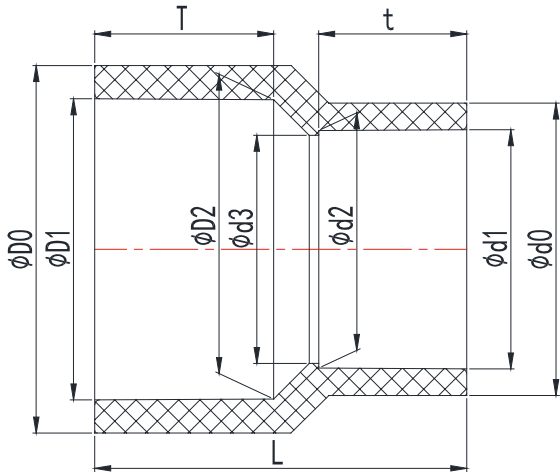

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions (mm)										公称压力 Nominal Pressure PN(kg/cm²)
	D0	D1	D2	d0	d1	d2	d3	t	T	L	
20X15(25*20)	31.80	25.30	24.95	26.30	20.30	19.95	18.00	16.20	18.70	40.00	S5(PN20)
25X15(32*20)	39.90	32.30	31.90	26.30	20.30	19.95	18.00	16.20	22.20	48.50	S5(PN20)
25X20(32*25)	39.90	32.30	31.90	31.80	25.30	24.95	23.00	18.70	22.20	47.40	S5(PN20)
32X15(40*20)	49.40	40.35	39.90	26.30	20.30	19.95	18.00	16.20	26.20	56.50	S5(PN20)
32X20(40*25)	49.30	40.35	39.90	31.80	25.30	24.95	23.00	18.70	26.20	56.80	S5(PN20)
32X25(40*32)	49.40	40.35	39.90	39.70	32.30	31.90	30.00	22.20	26.20	54.80	S5(PN20)
40X15(50*20)	61.50	50.35	49.90	26.30	20.30	19.95	18.00	16.20	31.20	66.00	S5(PN20)
40X20(50*25)	61.50	50.35	49.90	31.80	25.30	24.95	23.00	18.70	31.20	66.00	S5(PN20)
40X25(50*32)	61.50	50.35	49.90	39.90	32.30	31.90	30.00	22.20	31.20	67.00	S5(PN20)
40X32(50*40)	61.90	50.35	49.90	49.70	40.35	39.90	38.00	26.20	31.20	65.00	S5(PN20)
50X15(63*20)	77.20	63.40	62.90	26.30	20.30	19.95	18.00	16.20	37.70	79.00	S5(PN20)
50X20(63*25)	77.30	63.40	62.90	31.80	25.30	24.95	23.00	18.70	37.70	79.00	S5(PN20)
50X25(63*32)	77.90	63.40	62.90	39.90	32.30	31.90	30.00	22.20	37.70	80.00	S5(PN20)
50X32(63*40)	77.30	63.40	62.90	49.70	40.35	39.90	38.00	26.20	37.70	80.00	S5(PN20)
50X40(63*50)	77.30	63.40	62.90	61.90	50.35	49.90	48.00	31.20	37.70	77.70	S5(PN20)
65X15(75*20)	90.80	75.40	74.90	26.30	20.30	19.95	18.00	16.20	43.70	93.00	S6.3(PN16)
65X20(75*25)	90.80	75.40	74.90	31.80	25.30	24.95	23.00	18.70	43.70	92.70	S6.3(PN16)
65X25(75*32)	90.80	75.40	74.90	39.90	32.30	31.90	30.00	22.20	43.70	93.50	S6.3(PN16)
65X32(75*40)	90.80	75.40	74.90	49.40	40.35	39.90	38.00	26.20	43.70	93.00	S6.3(PN16)
65X40(75*50)	91.00	75.40	74.90	61.70	50.35	49.90	48.00	31.20	43.70	93.30	S6.3(PN16)
65X50(75*63)	91.00	75.40	74.90	77.50	63.40	62.90	61.00	37.70	43.70	92.50	S6.3(PN16)
80X20(90*25)	107.30	90.50	89.90	32.00	25.30	24.95	23.00	18.70	51.20	108.00	S6.3(PN16)
80X25(90*32)	107.20	90.50	89.90	40.40	32.30	31.90	30.00	22.20	51.20	108.10	S6.3(PN16)
80X32(90*40)	107.20	90.50	89.90	49.70	40.35	39.90	38.00	26.20	51.20	108.50	S6.3(PN16)
80X40(90*50)	107.30	90.50	89.90	61.60	50.35	49.90	48.00	31.20	51.20	108.20	S6.3(PN16)
80X50(90*63)	107.30	90.50	89.90	77.30	63.40	62.90	61.00	37.70	51.20	108.00	S6.3(PN16)
80X65(90*75)	107.30	90.50	89.90	91.20	75.40	74.90	70.90	43.70	51.20	107.30	S6.3(PN16)
100X20(110*25)	127.00	110.60	109.90	32.00	25.30	24.95	23.00	18.70	61.20	127.80	S6.3(PN16)
100X25(110*32)	127.00	110.60	109.90	40.10	32.30	31.90	30.00	22.20	61.20	128.30	S6.3(PN16)
100X32(110*40)	126.80	110.60	109.90	49.70	40.35	39.90	38.00	26.20	61.20	128.60	S6.3(PN16)
100X40(110*50)	127.00	110.60	109.90	61.70	50.35	49.90	48.00	31.20	61.20	128.00	S6.3(PN16)
100X50(110*63)	127.40	110.60	109.90	77.50	63.40	62.90	61.00	37.70	61.20	128.00	S6.3(PN16)
100X65(110*75)	127.00	110.60	109.90	90.80	75.40	74.90	70.90	43.70	61.20	128.60	S6.3(PN16)
100X80(110*90)	127.00	110.60	109.90	107.30	90.50	89.90	85.90	51.20	61.20	127.40	S6.3(PN16)
De125*110	144.00	125.70	124.90	127.00	110.60	109.90	103.90	61.20	68.70	142.60	S6.3(PN16)
125X40(140*50)	161.60	140.75	139.90	61.60	50.30	49.90	48.00	31.11	76.20	157.60	S6.3(PN16)
125X50(140*63)	161.60	140.75	139.90	77.60	63.40	62.90	61.00	37.59	76.20	158.00	S6.3(PN16)
125X65(140*75)	161.60	140.75	139.90	91.00	75.35	74.90	70.90	43.57	76.20	158.50	S6.3(PN16)
125X80(140*90)	161.70	140.75	139.90	77.50	90.50	89.90	85.90	52.00	76.20	158.30	S6.3(PN16)
125X100(140*110)	161.80	140.75	139.90	127.20	110.60	109.90	103.90	61.02	76.20	157.70	S6.3(PN16)
De140*125	161.80	140.75	139.90	144.60	125.65	124.90	118.90	68.70	76.20	157.50	S6.3(PN16)
150X50(160*63)	184.60	160.70	159.90	127.00	63.35	62.90	61.00	37.82	87.00	180.50	S6.3(PN16)
150X65(160*75)	184.60	160.70	159.90	91.20	75.35	74.90	70.90	43.83	87.00	179.00	S6.3(PN16)
150X80(160*90)	184.60	160.70	159.90	107.70	90.50	89.90	85.90	51.36	87.00	178.70	S6.3(PN16)
150X100(160*110)	184.60	160.70	159.90	127.50	110.60	109.90	103.90	61.40	87.00	180.20	S6.3(PN16)
150X125(160*140)	184.60	160.70	159.90	161.90	140.75	139.90	133.90	77.00	87.00	177.30	S6.3(PN16)
De180*160	202.60	180.80	179.90	180.00	160.70	159.90	153.90	87.00	97.00	202.20	S6.3(PN16)
De200*160	230.00	201.00	199.90	184.00	160.80	159.90	153.90	86.20	106.20	217.50	S6.3(PN16)

200X150(225*160)	259.40	226.20	224.90	184.00	160.80	159.90	153.90	86.20	119.10	242.50	S6.3(PN16)
De225*200	259.40	226.20	224.90	230.50	201.00	199.90	193.50	106.20	119.10	243.00	S6.3(PN16)
De250*225	287.90	251.30	249.90	259.00	226.20	224.90	216.90	119.10	131.65	269.50	S8(PN16)
250X200(280*225)	314.80	281.30	279.90	259.40	226.20	224.90	216.90	119.10	147.00	304.50	S8(PN16)
300X250(315*280)	354.60	316.60	314.90	314.80	281.30	279.90	278.00	147.00	164.30	338.00	S8(PN16)
350X300(355*315)	391.00	356.80	355.00	354.60	316.60	314.90	306.90	164.30	184.30	384.00	PN6
400X300(400*315)	442.00	402.00	400.00	344.00	316.60	314.90	306.90	164.30	207.00	435.00	PN6
400X350(400*355)	442.00	402.00	400.00	384.25	356.80	355.00	326.00	184.30	207.00	430.70	PN6
500X400(500*400)	540.50	503.00	500.00	433.80	401.50	400.00	390.00	206.00	261.00	540.00	PN6
600X300(630*315)	668.50	633.00	630.00	346.50	316.50	315.00	305.00	163.50	321.00	680.00	PN6
600X400(630*400)	668.50	633.00	630.00	433.80	401.50	400.00	390.00	206.00	321.00	680.00	PN6
600X500(630*500)	668.50	633.00	630.00	540.50	503.00	500.00	490.00	256.00	321.00	680.00	PN6

产品参数（美标 SCH80）

SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size (英寸)	外形尺寸 Dimensions (mm)									
	D0	D1	D2	d0	d1	d2	d3	t	T	L
3/4"*1/2"	36.90	26.87	26.57	30.50	21.54	21.23	17.00	23.22	26.40	58.60
1"*1/2"	44.70	33.66	33.27	30.50	21.54	21.23	17.00	23.22	29.57	65.10
1"*3/4"	44.70	33.66	33.27	36.90	26.87	26.57	22.50	26.40	29.57	66.30
1-1/4"*1/2"	54.00	42.42	42.04	30.50	21.54	21.23	17.00	23.22	32.75	72.68
1-1/4"*3/4"	54.00	42.42	42.04	36.90	26.87	26.57	22.50	26.40	32.75	73.80
1-1/4"*1"	54.00	42.42	42.04	44.70	33.66	33.27	29.00	29.57	32.75	73.80
1-1/2"*3/4"	60.60	48.56	48.11	36.90	26.87	26.57	22.50	26.40	35.93	80.00
1-1/2"*1"	60.60	48.56	48.11	40.70	33.66	33.27	29.00	29.57	35.93	80.00
1-1/2"*1-1/4"	60.60	48.56	48.11	54.00	42.42	42.04	38.00	32.75	35.93	78.70
2"*1"	73.10	60.63	60.17	44.70	33.66	33.27	29.00	29.57	39.10	88.20
2"*1-1/4"	73.10	60.63	60.17	54.00	42.42	42.04	38.00	32.75	39.10	88.20
2"*1-1/2"	73.10	60.63	60.17	60.60	48.56	48.11	43.00	35.93	39.10	88.50
10"*8"	305.00	273.81	272.67	245.90	219.84	218.69	208.00	102.60	128.00	269.75
20"x16"	540.50	511.00	508.00	433.80	401.50	400.00	390.00	183.7	236.00	540.00
24"x16"	668.50	612.60	609.60	433.80	401.50	400.00	390.00	183.7	306.00	680.00
24"x20"	668.50	612.60	609.60	540.50	511.00	508.00	490.00	236.00	306.00	680.00

EXPERT IN PIPING SYSTEM


管路系统专家



PVC-U/C

COPPER THREADED REDUCER

铜内丝直接，PVC-U/C（国标）

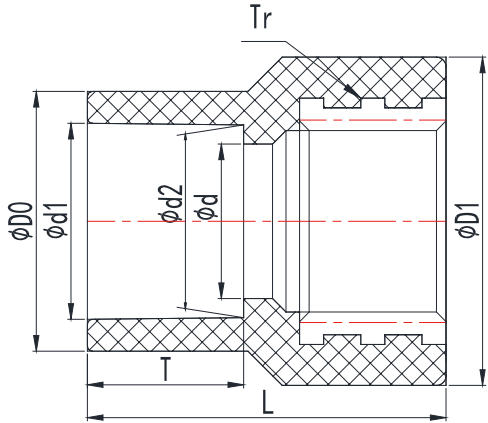

产品参数（国标 GB/T 4219.2）


SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN	外形尺寸 Dimensions (mm)								公称压力 Nominal Pressure PN(kg/cm²)
	D0	D1	d1	d2	T	d	L	Tr 螺纹 PT	
15	26.90	34.00	20.30	19.95	16.20	16.00	37.20	1/2"	S5(PN20)
20	32.60	39.50	25.30	24.95	18.70	21.00	40.70	3/4"	S5(PN20)
25	40.10	46.50	32.30	31.90	22.20	28.00	47.90	1"	S5(PN20)

PVC-U/C

CAP

管堵，PVC-U/C（国标，美标）

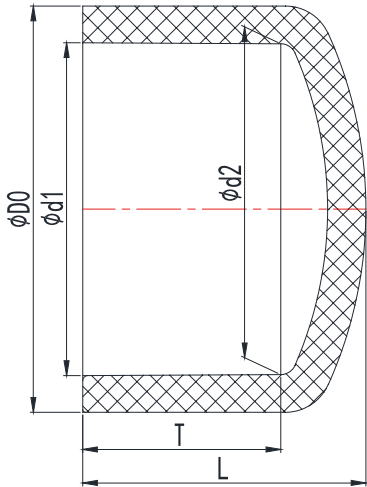

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN	外形尺寸 Dimensions（mm）					公称压力 Nominal Pressure PN(kg/cm²)
	D0	d1	d2	T	L	
15	26.30	20.30	19.95	16.20	21.90	S5(PN20)
20	31.80	25.30	24.95	18.70	25.70	S5(PN20)
25	39.90	32.30	31.90	22.20	30.70	S5(PN20)
32	49.70	40.40	39.90	26.20	36.90	S5(PN20)
40	61.90	50.40	49.90	31.20	44.70	S5(PN20)
50	77.90	63.40	62.90	37.70	54.00	S5(PN20)
65	91.20	75.40	74.90	43.70	62.60	S6.3(PN16)
80	107.60	90.50	89.90	51.20	73.30	S6.3(PN16)
100	127.00	110.60	109.90	61.20	84.50	S6.3(PN16)
De125	144.30	125.70	124.90	68.70	96.10	S6.3(PN16)
125	161.60	140.80	139.90	76.20	109.70	S6.3(PN16)
150	184.60	160.80	159.90	86.20	126.20	S6.3(PN16)
De180	202.60	180.90	179.90	97.00	142.90	S6.3(PN16)
De200	230.50	201.00	199.90	106.20	151.10	S6.3(PN16)
200	259.40	226.20	224.90	119.10	170.40	S6.3(PN16)
De250	287.90	251.30	249.90	131.65	186.90	S8(PN16)
250	314.80	281.50	279.90	147.00	212.50	S8(PN16)
300	358.20	316.70	314.90	164.30	234.50	S8(PN16)
350	391.00	356.80	355.00	184.30	265.00	PN6
400	442.00	402.00	400.00	204.20	294.00	PN6

产品参数（美标 SCH80）


SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size (*")	外形尺寸 Dimensions（mm）				
	D0	d1	d2	T	L
1/2"	29.54	21.54	21.23	23.22	30.80
3/4"	35.31	26.87	26.57	26.40	35.13
1"	43.70	33.66	33.27	29.57	40.00
1-1/4"	53.05	42.42	42.04	32.75	45.00
1-1/2"	59.86	48.56	48.11	35.93	49.00
2"	72.23	60.63	60.17	39.10	53.95
2-1/2"	87.98	73.38	72.85	45.45	64.20
3"	105.30	89.31	88.70	48.63	58.00
4"	132.00	114.76	114.07	58.15	81.00
5"	161.80	141.81	141.04	67.68	106.50
6"	190.85	168.83	168.00	77.20	119.55
8"	245.85	219.84	218.69	102.60	141.70
10"	305.80	273.81	272.67	128.00	186.25
12"	358.20	324.7	323.2	163.70	234.50

PVC-U/C

COUPLING

管箍，PVC-U/C（国标，美标）

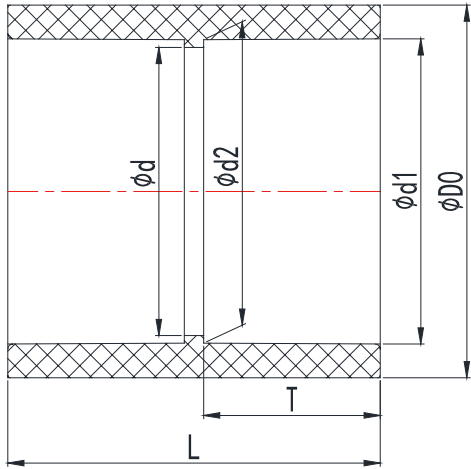

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN	外形尺寸 Dimensions（mm）						公称压力 Nominal Pressure PN(kg/cm²)
	D0	d1	d2	d	T	L	
15	26.30	20.30	19.95	18.00	16.20	34.40	S5(PN20)
20	31.80	25.30	24.95	23.00	18.70	39.00	S5(PN20)
25	39.90	32.30	31.90	30.00	22.20	46.40	S5(PN20)
32	49.40	40.40	39.90	38.00	26.20	54.40	S5(PN20)
40	61.40	50.40	49.90	48.00	31.20	64.40	S5(PN20)
50	77.10	63.40	62.90	61.00	37.70	77.10	S5(PN20)
65	91.00	75.40	74.90	68.20	43.70	90.00	S6.3(PN16)
80	107.60	90.50	89.90	83.80	51.20	106.40	S6.3(PN16)
100	127.20	110.60	109.90	103.00	61.20	128.30	S6.3(PN16)
De125	144.30	125.70	124.90	118.60	68.70	144.00	S6.3(PN16)
125	161.60	140.80	139.90	133.80	76.20	159.50	S6.3(PN16)
150	184.60	160.80	159.90	153.80	86.20	179.70	S6.3(PN16)
De180	202.60	180.90	179.90	178.50	97.00	199.00	S6.3(PN16)
De200	230.30	201.00	199.90	193.50	106.20	217.50	S6.3(PN16)
200	259.40	226.20	224.90	216.90	119.10	243.00	S6.3(PN16)
De250	287.90	251.30	249.90	241.90	131.65	268.30	S8(PN16)
250	314.50	281.50	279.90	278.00	147.00	300.00	S8(PN16)
300	354.00	316.70	314.90	306.90	164.30	335.40	S8(PN16)
350	384.25	356.80	355.00	326.00	184.30	373.50	S8(PN16)
400	430.15	402.00	400.00	369.80	205.50	422.80	S8(PN16)
500(500)	540.50	503.00	500.00	469.00	256.00	540.00	PN6
600(630)	668.50	633.00	630.00	591.80	321.00	680.00	PN6

产品参数（美标 SCH80）


SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size (英寸)	外形尺寸 Dimensions（mm）					
	D0	d1	d2	d	T	L
1/2"	30.50	21.54	21.23	17.00	23.22	50.40
3/4"	36.90	26.87	26.57	22.50	26.40	56.80
1"	44.70	33.66	33.27	29.00	29.57	63.10
1-1/4"	54.00	42.42	42.04	38.00	32.75	69.50
1-1/2"	60.60	48.56	48.11	43.00	35.93	75.80
2"	73.10	60.63	60.17	55.00	39.10	82.20
2-1/2"	88.40	73.38	72.85	67.50	45.45	96.00
3"	105.30	89.31	88.70	83.00	48.63	102.30
4"	132.00	114.76	114.07	106.00	58.15	124.00
5"	161.90	141.81	141.04	133.00	67.68	144.00
6"	190.90	168.83	168.00	160.00	77.20	164.40
8"	245.90	219.84	218.69	208.00	102.60	215.20
10"	305.80	273.81	272.67	262.50	128.00	266.00
12"	360.60	324.60	323.47	313.00	153.40	316.80
14"	394.11	355.94	354.33	331.50	200.00	378.00
16"	450.00	407.19	405.33	363.80	230.66	420.00
20"	540.50	511.00	508.00	469.00	236.00	540.00
24"	668.50	612.60	609.60	591.80	306.00	680.00

PVC-U/C

FEMALE ADAPTOR

内丝，PVC-U/C（国标，美标）

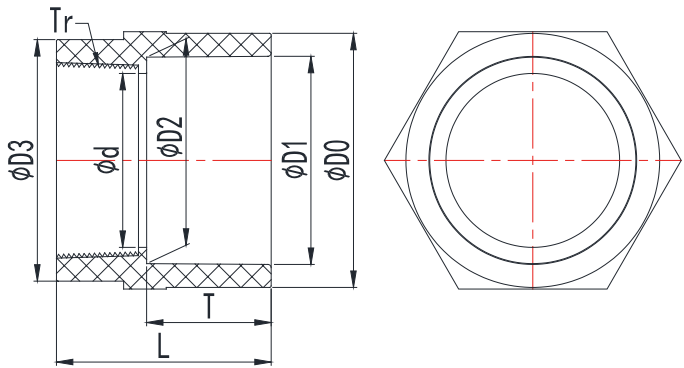

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN	外形尺寸 Dimensions（mm）								公称压力 Nominal Pressure PN(kg/cm²)
	D0	D1	D2	D3	d	T	L	Tr 螺纹 PT	
15	27.10	20.30	19.95	27.60	16.50	16.50	33.50	1/2"	S5(PN20)
20	32.50	25.30	24.95	33.60	22.00	19.00	37.00	3/4"	S5(PN20)
25	40.30	32.30	31.90	41.30	28.00	22.50	42.20	1"	S5(PN20)
32	49.50	40.35	39.90	51.10	36.00	26.50	49.00	1-1/4"	S5(PN20)
40	61.60	50.35	49.90	59.00	42.00	31.50	54.00	1-1/2"	S5(PN20)
50	77.40	63.40	62.90	73.60	53.00	38.00	65.50	2"	S5(PN20)
65	90.40	75.40	74.90	90.20	68.00	44.00	76.00	2-1/2"	S6.3(PN16)
80	106.50	90.50	89.90	107.60	80.00	51.50	86.50	3"	S6.3(PN16)
100	126.90	110.60	109.90	129.40	104.50	61.50	103.00	4"	S6.3(PN16)

产品参数（美标 SCH80）

SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size (*)	外形尺寸 Dimensions（mm）							
	D0	D1	D2	D3	d	T	L	Tr 螺纹 NPT
1/2"	29.70	21.54	21.23	29.22	16.00	23.22	40.22	1/2"
3/4"	35.30	26.87	26.57	34.97	20.60	26.40	44.40	3/4"
1"	43.70	33.66	33.27	43.35	26.00	29.57	49.60	1"
1-1/4"	53.10	42.42	42.04	52.58	36.00	32.75	55.25	1-1/4"
1-1/2"	59.90	48.56	48.11	59.45	41.00	35.93	58.45	1-1/2"
2"	73.10	60.63	60.17	72.10	52.00	39.10	66.60	2"
2-1/2"	88.00	73.38	72.85	87.30	64.00	45.45	77.50	2-1/2"
3"	105.30	89.31	88.70	104.60	78.00	48.63	83.65	3"
4"	132.00	114.76	114.07	131.65	102.50	58.15	99.70	4"

EXPERT IN PIPING SYSTEM


管路系统专家



PVC-U/C

MALE ADAPTOR

外丝，PVC-U/C（国标，美标）

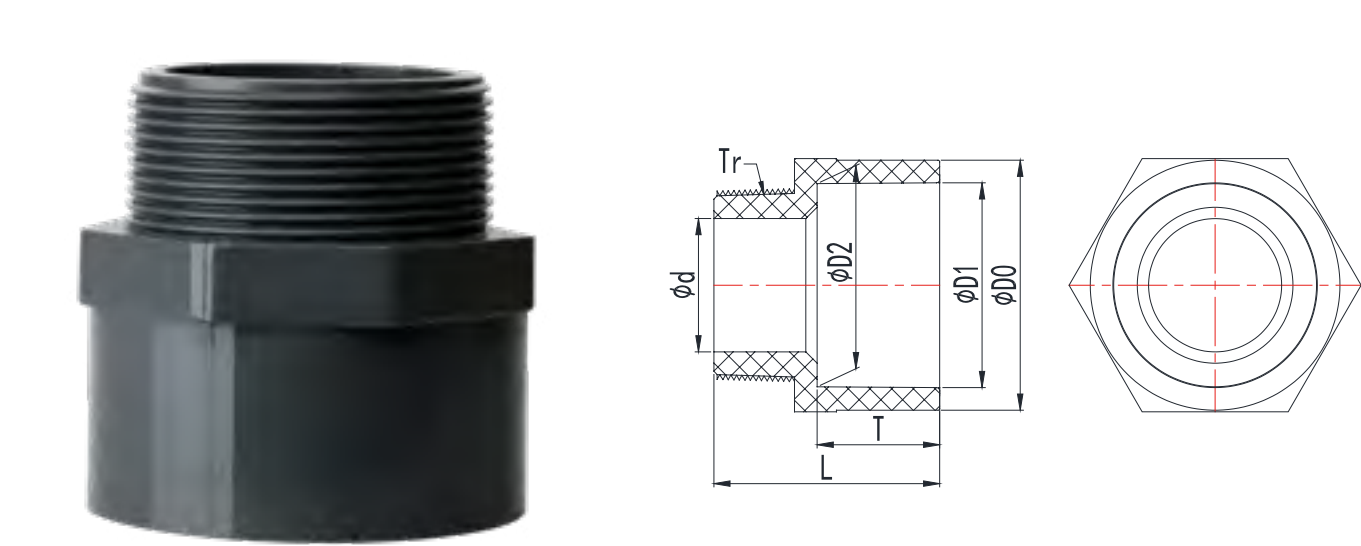

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN	外形尺寸 Dimensions（mm）							公称压力 Nominal Pressure PN(kg/cm²)
	D0	D1	D2	d	T	L	Tr 螺纹 PT	
15	26.80	20.30	19.95	11.30	16.50	35.00	1/2"	S5(PN20)
20	32.50	25.30	24.95	16.10	19.00	38.50	3/4"	S5(PN20)
25	40.30	32.30	31.90	21.40	22.50	44.50	1"	S5(PN20)
32	49.50	40.35	39.90	28.80	26.50	51.00	1-1/4"	S5(PN20)
40	61.60	50.35	49.90	32.50	31.50	56.50	1-1/2"	S5(PN20)
50	77.00	63.40	62.90	41.30	38.00	69.40	2"	S5(PN20)
65	90.40	75.40	74.90	55.80	44.00	79.90	2-1/2"	S6.3(PN16)
80	106.50	90.50	89.90	67.30	51.50	91.50	3"	S6.3(PN16)
100	126.90	110.60	109.90	91.60	61.50	108.00	4"	S6.3(PN16)

产品参数（美标 SCH80）

SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size (*")	外形尺寸 Dimensions（mm）						
	D0	D1	D2	d	T	L	Tr 螺纹 NPT
1/2"	29.55	21.54	21.23	11.30	23.22	41.50	1/2"
3/4"	35.30	26.87	26.57	16.00	26.40	45.90	3/4"
1"	43.66	33.66	33.27	21.35	29.57	51.50	1"
1-1/4"	50.00	42.42	42.04	28.80	32.75	56.80	1-1/4"
1-1/2"	59.85	48.56	48.11	32.50	35.93	61.50	1-1/2"
2"	72.25	60.63	60.17	41.30	39.10	71.00	2"
2-1/2"	88.00	73.38	72.85	55.80	45.45	82.00	2-1/2"
3"	105.45	89.31	88.70	67.30	48.63	88.65	3"
4"	132.00	114.76	114.07	91.60	58.15	104.65	4"

EXPERT IN PIPING SYSTEM


管路系统专家



PVC-U/C

ONE-PIECE FLANGE

单片式法兰，PVC-U/C（国标，美标）

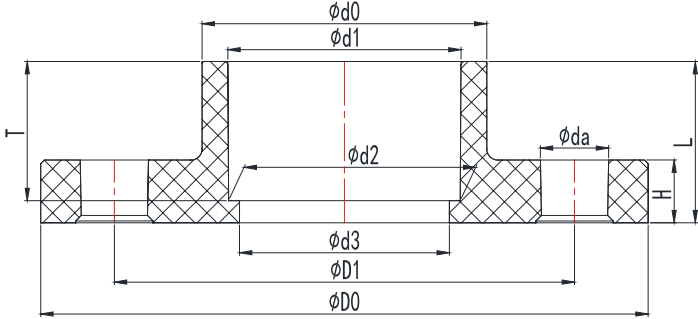

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN	外形尺寸 Dimensions（mm）											公称压力 Nominal Pressure PN(kg/cm²)
	D0	D1	d0	d1	d2	d3	da	T	H	L	螺孔数 n Number of bolt hole	
15	95.00	65.00	26.80	20.30	19.95	16.00	14.00	16.20	12.40	20.20	4	PN16
20	105.00	75.00	32.50	25.30	24.95	21.00	14.00	18.70	13.50	22.70	4	PN16
25	115.00	85.00	40.30	32.30	31.90	28.00	14.00	22.20	15.00	26.20	4	PN16
32	140.00	100.00	49.30	40.35	39.90	36.00	18.00	26.20	14.40	31.20	4	PN16
40	150.00	110.00	61.60	50.35	49.90	46.00	18.00	31.20	15.50	36.20	4	PN16
50	165.00	125.00	77.40	63.40	62.90	57.00	18.00	37.70	15.50	43.70	4	PN16
65	185.00	145.00	90.40	75.40	74.90	69.00	18.00	43.70	17.30	50.20	4	PN16
80	200.00	160.00	106.50	90.50	89.90	83.00	18.00	51.20	18.50	58.70	8	PN16
100	220.00	180.00	126.90	110.60	109.90	103.00	18.00	61.20	20.30	68.70	8	PN16
De125	250.00	210.00	144.00	125.70	124.90	117.00	18.00	68.70	22.00	77.20	8	PN16
125	250.00	210.00	161.30	140.75	139.90	131.50	18.00	76.20	22.20	84.70	8	PN16
150	285.00	240.00	184.30	160.80	159.90	151.00	22.00	86.20	25.00	95.70	8	PN16
De180	285.00	240.00	202.60	180.80	179.90	166.00	22.00	97.00	25.50	115.00	8	PN10
De200	340.00	295.00	227.00	201.00	199.90	190.00	22.00	106.20	26.30	116.20	8	PN10
200	340.00	295.00	254.10	226.20	224.90	216.00	22.00	119.10	27.00	129.70	8	PN10
De250	395.00	350.00	281.30	251.30	249.90	239.50	22.00	131.65	28.00	142.20	12	PN10
250	405.00	350.00	310.40	281.50	279.90	264.00	22.00	147.00	29.00	169.00	12	PN10
300	445.00	400.00	354.60	316.70	314.90	302.00	22.00	167.70	31.50	179.70	12	PN10

产品参数（美标 SCH80）


SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size (英寸)	外形尺寸 Dimensions（mm）										
	D0	D1	d0	d1	d2	d3	da	T	H	L	螺孔数 n Number of bolt hole
1/2"	89.00	60.30	29.54	21.54	21.23	17.00	16.00	23.22	13.00	27.72	4
3/4"	89.00	69.85	35.27	26.87	26.57	22.50	16.00	26.40	14.00	30.90	4
1"	108.00	79.38	43.66	33.66	33.27	29.00	16.00	29.57	15.00	34.10	4
1-1/4"	117.00	88.90	53.02	42.42	42.04	38.00	16.00	32.75	15.00	38.75	4
1-1/2"	127.00	98.43	59.86	48.56	48.11	43.00	16.00	35.93	17.00	41.95	4
2"	152.00	120.65	72.23	60.63	60.17	55.00	19.00	39.10	19.00	46.10	4
2-1/2"	178.00	139.70	88.00	73.38	72.85	67.50	19.00	45.45	20.00	53.00	4
3"	191.00	152.40	105.30	89.31	88.70	83.00	19.00	48.63	20.50	57.15	4
4"	229.00	190.50	132.00	114.76	114.07	106.00	19.00	58.15	21.00	66.65	8
5"	254.00	216.00	162.00	141.81	141.04	133.00	22.00	67.68	23.50	77.50	8
6"	284.00	241.30	190.85	168.83	168.00	160.00	22.00	77.20	26.50	88.20	8
8"	343.00	298.45	245.84	219.84	218.69	208.00	22.00	102.60	27.00	113.60	8

PVC-U/C

VANSTONE FLANGE

活套平承法兰，PVC-U/C（国标，美标）

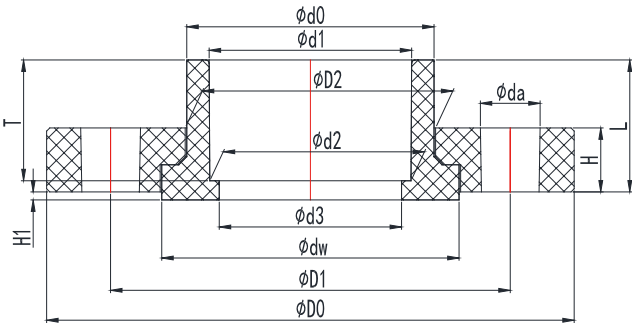

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN	外形尺寸 Dimensions（mm）														公称压力 Nominal Pressure PN(kg/cm²)
	D0	D1	D2	d0	d1	d2	d3	dw	da	T	H1	H	L	螺孔数 n Number of bolt hole	
15	95	65	31	30.5	20.3	19.95	16	37.6	14	23.22	2.5	13	24.7	4	PN16
20	105	75	37.9	36.9	25.35	24.95	20.6	47	14	26.4	2.5	14	27.9	4	PN16
25	115	85	45.7	44.7	32.35	31.95	27	56	14	29.58	2.5	15	31.08	4	PN16
32	140	100	55	54	40.4	39.95	36	64	18	32.75	2.5	15	35.25	4	PN16
40(50)	150.00	110.00	62.60	61.60	50.35	49.90	45.00	74.00	18.00	31.20	2.50	18.00	33.70	4	PN16
50(63)	165.00	125.00	78.40	77.40	63.40	62.90	57.00	93.00	18.00	37.70	2.50	20.00	41.20	4	PN16
65(75)	185.00	145.00	91.40	90.40	75.40	74.90	69.00	110.00	18.00	43.70	2.50	23.00	47.20	4	PN16
80(90)	200.00	160.00	107.50	106.50	90.50	89.90	83.00	126.00	18.00	51.20	2.50	26.00	55.70	8	PN16
100(110)	220.00	180.00	127.90	126.90	110.60	109.90	103.00	147.00	18.00	61.20	2.50	28.00	65.70	8	PN16
De125	250.00	210.00	145.00	144.00	125.70	124.90	117.00	164.00	18.00	68.70	2.50	29.00	74.20	8	PN16
125(140)	250.00	210.00	162.30	161.30	140.75	139.90	131.50	181.00	18.00	76.20	2.50	30.00	81.70	8	PN16
150(160)	285.00	240.00	186.30	184.30	160.80	159.90	151.00	204.00	22.00	86.20	3.00	32.00	92.20	8	PN16
De180	285.00	240.00	229.00	227.00	201.00	199.90	190.00	257.40	22.00	106.20	3.00	36.00	112.20	8	PN10
De200	340.00	295.00	229.00	227.00	201.00	199.90	190.00	256.00	22.00	106.20	3.00	36.00	112.20	12	PN16
200(225)	340.00	295.00	256.10	254.10	226.20	224.90	216.00	271.00	22.00	118.70	3.00	38.00	127.70	12	PN16
De200	340.00	295.00	229.00	227.00	201.00	199.90	190.00	256.00	22.00	106.20	3.00	36.00	112.20	8	PN10
200(225)	340.00	295.00	256.10	254.10	226.20	224.90	216.00	271.00	22.00	118.70	3.00	38.00	127.70	8	PN10
De250	395.00	350.00	283.30	281.30	251.30	249.90	239.50	310.00	22.00	131.20	3.50	40.00	138.20	12	PN10
250(280)	398.00	351.50	308.00	305.50	281.50	280.15	272.00	325.00	22.00	147.00	10.00	35.00	159.00	12	PN10
300(315)	445.00	400.00	356.60	354.60	316.70	314.90	302.00	373.00	22.00	167.70	5.00	44.00	175.70	12	PN10
350(355)	510.00	460.00	388.60	386.60	356.80	355.00	326.00	417.00	22.00	184.00	32.00	40.00	197.00	16	PN10
400(400)	570.00	515.00	438.00	432.00	402.00	400.00	388.00	463.00	26.00	208.00	35.00	43.80	220.00	16	PN10
De450	620.00	565.00	488.50	486.00	451.94	450.05	447.00	518.00	26.00	233.00	38.00	45.00	245.00	20	PN10
500	670.00	620.00	541.00	536.50	502.80	500.60	486.00	573.00	26.00	256.00	38.00	50.00	268.00	20	PN10
600	813.00	725.00	670.00	668.50	633.00	629.00	621.00	697.00	30.00	321.00	37.00	50.00	316.00	20	PN10

产品参数（美标 SCH80）


SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size (*")	外形尺寸 Dimensions (mm)													
	D0	D1	D2	d0	d1	d2	d3	dw	da	T	H1	H	L	螺孔数 n Number of bolt hole
1/2"	89	61	31	30.5	21.54	21.23	16	37.6	16	23.22	2.5	13	24.72	4
3/4"	98	70	37.9	36.9	26.87	26.57	20.6	47	16	26.4	2.5	14	27.9	4
1"	108	79	45.7	44.7	33.66	33.27	27	56	16	29.58	2.5	15	31.08	4
1-1/4"	117	89	55	54	42.42	42.04	36	64	16	32.75	2.5	15	35.25	4
1-1/2"	127	98	62.6	61.6	50.46	50.46	45	72.4	16	35.93	2.5	18	38.43	4
2"	152	121	74.1	73.1	60.63	60.17	52.5	88.5	19	39.1	2.5	20	42.6	4
2-1/2"	178	140	89.4	88.4	73.38	72.85	65	108	19	45.5	2.5	23	49	4
3"	191	152	106.3	105.3	89.31	88.7	80	124.8	19	48.63	2.5	26	53.13	4
4"	229	191	133	132	114.76	114.07	102	152	19	58.15	2.5	28	62.65	8
5"	254	216	162.9	161.9	141.81	141.04	122	181.5	22	68	2.5	30	73.5	8
6"	284	241	192.5	191.5	168.83	168	150	209.5	22	77.2	3	32	83.2	8
8"	343	298	247.9	246.9	219.84	218.69	193	264.9	22	102.6	3	36	108.6	8
10"	410	362	309.8	305.8	273.81	272.67	262.5	327.37	24	128	3	42	138	12
12"	482.6	432	366.6	362.6	324.6	323.47	313.	384.60	24	153.4	3	44	166	12
14"	534	476.3	402	399.2	356.6	355.5	331.5	426.6	28.6	183.5	3	52	186	12
16"	600	540.8	456	451.6	407.6	406.36	342.5	482.4	28.6	208	3	60	210	16
20"	698.00	635.00	541.00	536.50	511.00	508.00	486.00	573.00	26	236.00	38.00	42.90	268.00	20
24"	813.00	725.00	670.00	668.50	612.60	609.60	621.00	697.00	33	306.00	37.00	47.70	316.00	20

PVC-U/C

BLIND FLANGE

盲法兰，PVC-U/C（国标，美标）

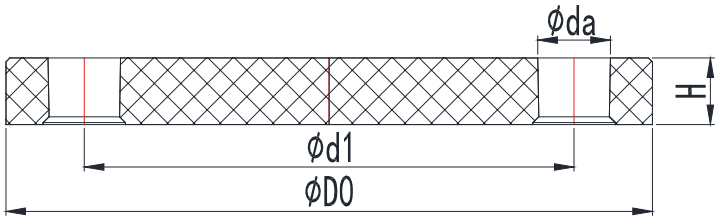

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN	外形尺寸 Dimensions（mm）					公称压力 Nominal Pressure PN(kg/cm²)
	D0	d1	da	H	螺孔数 n Number of bolt hole	
15(20)	95.00	65.00	14.00	12.50	4	PN16
20(25)	105.00	75.00	14.00	13.40	4	PN16
25(32)	115.00	85.00	14.00	14.00	4	PN16
32(40)	140.00	100.00	18.00	14.40	4	PN16
40(50)	150.00	110.00	18.00	16.40	4	PN16
50(63)	165.00	125.00	18.00	16.20	4	PN16
65(75)	185.00	145.00	18.00	17.50	4	PN16
80(90)	200.00	160.00	18.00	18.00	8	PN16
100(110)	220.00	180.00	18.00	22.00	8	PN16
125(140)	250.00	210.00	18.00	27.00	8	PN16
150(160)	285.00	240.00	22.00	28.00	8	PN16
200(225)	340.00	295.00	22.00	29.50	8	PN10
250(280)	405.00	350.00	22.00	33.00	12	PN10
300(315)	445.00	400.00	22.00	31.50	12	PN10
350(355)	510.00	450.00	24.00	40.00	16	PN10
400(400)	570.00	500.00	27.00	33.00	16	PN10
500(500)	670.00	620.00	27.00	45.00	20	PN10
600(630)	813.00	725.00	30.00	53.00	20	PN10


产品参数（美标 SCH80）

SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size (*)	外形尺寸 Dimensions (mm)				
	D0	d1	da	H	螺孔数 n Number of bolt hole
1/2"	89.00	60.30	16.00	14.50	4
3/4"	89.00	69.85	16.00	15.30	4
1"	108.00	79.38	16.00	16.30	4
1-1/4"	117.00	88.90	16.00	15.80	4
1-1/2"	127.00	98.43	16.00	18.50	4
2"	152.00	120.65	19.00	20.50	4
2-1/2"	178.00	139.70	19.00	21.30	4
3"	191.00	152.40	19.00	22.00	4
4"	229.00	190.50	19.00	23.20	8
5"	254.00	216.00	22.00	25.00	8
6"	284.00	241.30	22.00	28.30	8
8"	343.00	298.45	22.00	28.70	8
10"	410.00	362.00	24.00	40.00	12
12"	482.60	432.00	24.00	42.00	12
14"	534.00	476.30	28.60	45.00	12
16"	598.35	540.80	28.60	52.00	16
20"	698.00	635.00	26.00	42.90	20
24"	813.00	725.00	30.00	47.70	20

PVC-U/C
UNION

由任（由令），PVC-U/C（国标，美标）

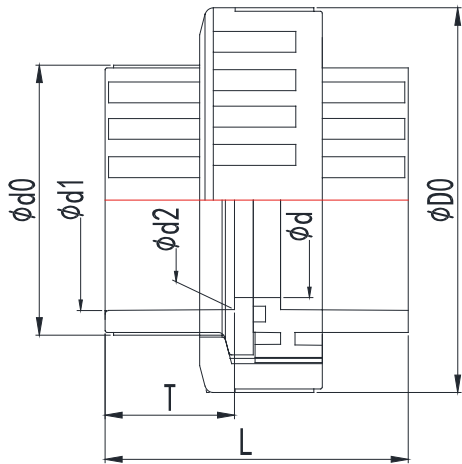

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN	外形尺寸 Dimensions（mm）							公称压力 Nominal Pressure PN(kg/cm²)
	D0	d0	d1	d2	d	T	L	
15	47.00	26.80	20.30	19.95	15.50	16.50	41.50	PN10
20	53.90	32.00	25.30	24.95	20.00	19.00	48.00	PN10
25	67.00	40.30	32.30	31.90	26.00	22.50	55.00	PN10
32	78.50	49.10	40.35	39.90	34.00	26.50	63.50	PN10
40	93.00	61.60	50.35	49.90	43.00	31.50	75.50	PN10
50	110.60	76.00	63.40	62.90	56.00	38.00	89.50	PN10
65	130.00	89.60	75.40	74.90	67.00	44.00	102.00	PN10
80	147.50	105.50	90.50	89.90	82.00	51.50	120.00	PN10
100	173.00	126.50	110.60	109.90	102.00	61.50	140.00	PN10


产品参数（美标 SCH80）

SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size （* "）	外形尺寸 Dimensions（mm）						
	D0	d0	d1	d2	d	T	L
1/2"	47.00	29.54	21.54	21.23	17.00	23.22	48.20
3/4"	54.00	35.36	26.87	26.57	22.50	26.40	55.50
1"	67.00	43.66	33.66	33.27	29.00	29.57	62.10
1-1/4"	78.50	53.02	42.42	42.04	38.00	32.75	70.00
1-1/2"	93.00	59.86	48.56	48.11	43.00	35.93	80.00
2"	110.60	72.23	60.63	60.17	55.00	39.10	90.50
2-1/2"	130.60	88.00	73.38	72.85	67.50	45.45	104.00
3"	148.50	105.30	89.31	88.70	83.00	48.63	117.00
4"	173.50	132.00	114.76	114.07	106.00	58.15	136.60

FLANGE GASKET

法兰垫片（三元乙丙橡胶 EPDM, 氟橡胶 FPM）（国标，美标）

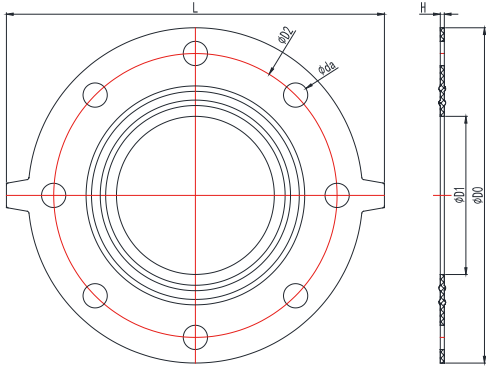

产品参数（国标 GB/T 4219.2） SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN	外形尺寸 Dimensions（mm）						
	D0	D1	D2	da	H	L	螺孔数 n Number of bolt hole
15	93.00	16.00	65.00	14.00	3.00	115.00	4
20	103.00	21.00	75.00	14.00	3.00	125.00	4
25	113.00	28.00	85.00	14.00	3.00	135.00	4
32	138.00	36.00	100.00	18.00	3.00	160.00	4
40	148.00	45.00	110.00	18.00	3.00	170.00	4
50	163.00	57.00	125.00	18.00	3.00	185.00	4
65	183.00	69.00	145.00	18.00	3.00	205.00	4
80	198.00	83.00	160.00	18.00	3.00	220.00	8
100	218.00	103.00	180.00	18.00	3.00	250.00	8
De125	248.00	117.00	210.00	18.00	3.00	280.00	8
125	248.00	131.50	210.00	18.00	3.00	280.00	8
150	283.00	151.00	240.00	22.00	3.00	315.00	8
De180	283.00	166.00	240.00	22.00	3.00	315.00	8
De200	338.00	190.00	295.00	22.00	3.00	370.00	8
200	338.00	203.00	295.00	22.00	3.00	370.00	8
De250	393.00	239.50	350.00	22.00	3.00	430.00	12
300	443.00	302.00	400.00	22.00	3.00	485.00	12
350	500.00	320.00	450.00	22.00	3.00	550.00	16
400	550.00	350.00	500.00	22.00	3.00	590.00	16


产品参数（美标 SCH80） SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size （"）	外形尺寸 Dimensions（mm）						
	D0	D1	D2	da	H	L	螺孔数 n Number of bolt hole
1/2"	87.00	16.00	60.33	3.00	16.00	109.00	4
3/4"	96.00	20.60	69.85	3.00	16.00	118.00	4
1"	106.00	27.00	79.38	3.00	16.00	128.00	4
1-1/4"	115.00	36.00	88.90	3.00	16.00	134.70	4
1-1/2"	125.00	41.50	98.43	3.00	16.00	146.60	4
2"	150.00	52.50	120.65	3.00	19.00	172.00	4
2-1/2"	176.00	65.00	139.70	3.00	19.00	198.00	4
3"	189.00	80.00	152.40	3.00	19.00	209.00	4
4"	226.00	102.00	190.50	3.00	19.00	258.00	8
5"	250.00	122.00	215.90	3.00	22.00	282.00	8
6"	281.00	150.00	241.30	3.00	22.00	313.00	8
8"	340.00	193.00	298.45	3.00	22.00	372.00	8
10"	408.00	262.50	362.00	3.00	25.00	450.00	12
12"	482.00	313.00	432.00	3.00	25.00	524.00	12
14"	543.00	342.50	476.30	3.00	28.60	573.00	12
16"	600.00	388.00	540.80	3.00	28.60	630.00	16

PVC-U

BRACKET

管卡，PVC-U（国标）

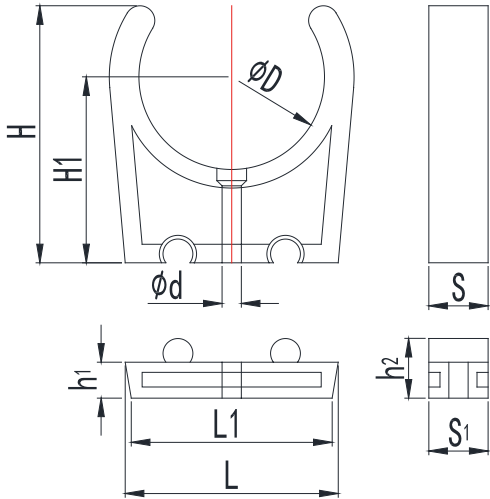

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN	外形尺寸 Dimensions（mm）									
	D	H	H1	d	S	L	L1	h1	h2	S1
15	20.20	35.40	27.20	5.20	16.00	-	-	-	-	-
20	25.10	41.00	30.50	5.20	16.00	-	-	-	-	-
25	32.10	52.80	40.00	5.20	16.00	-	-	-	-	-
32	40.10	59.30	44.00	5.20	16.00	-	-	-	-	-
40	50.10	71.20	52.00	5.20	16.00	-	-	-	-	-
50	63.10	88.50	65.00	5.20	16.00	-	-	-	-	-
65	75.10	91.80	62.50	5.20	16.00	82.85	79.11	20.00	26.90	16.00
80	90.10	103.90	69.00	5.20	20.00	97.22	91.87	30.00	36.90	20.00
100	110.10	124.50	85.00	5.20	20.00	105	96.38	30.00	36.90	20.00
125	140.10	154.50	108.00	9.00	25.40					


EXPERT IN PIPING SYSTEM

管路系统专家



PVC-U HEX NIPPLE

双头外丝，PVC-U（美标）

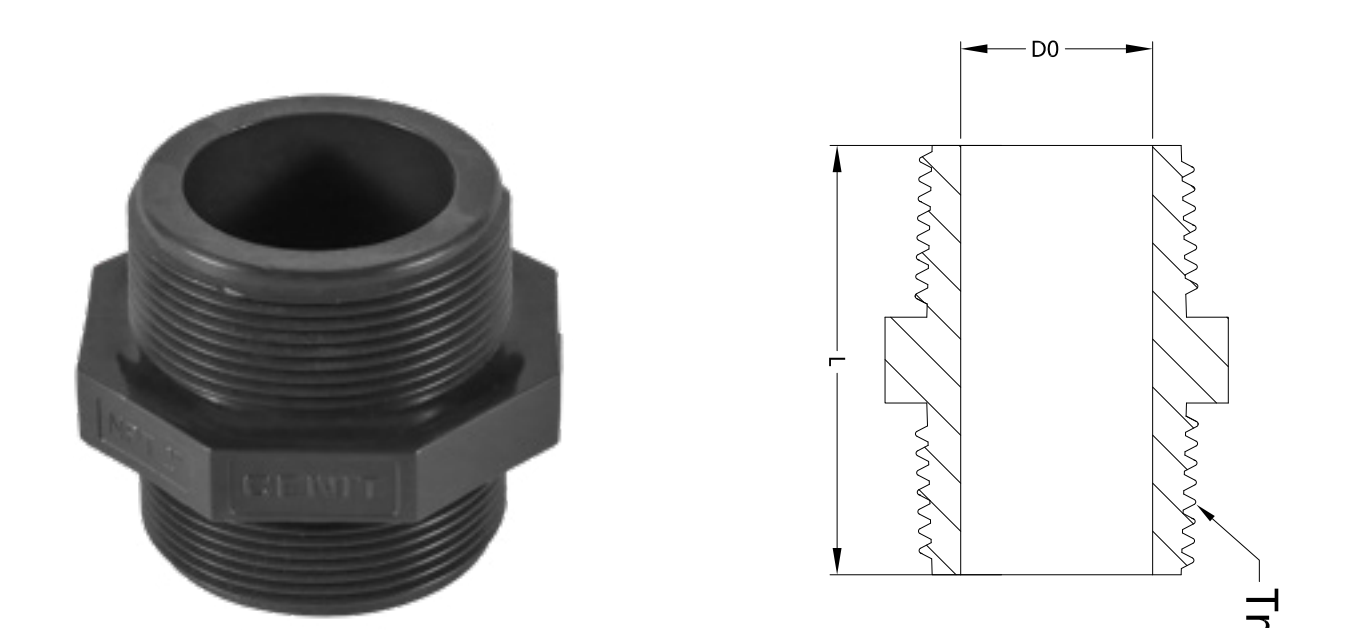


产品参数（美标 SCH80） SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）		
	D0	L	Tr 螺纹 NPT
1/2"	11.30	38	1/2"
3/4"	16.10	40	3/4"
1"	21.40	46	1"
1-1/4"	28.80	51	1-1/4"
1-1/2"	32.50	52	1-1/2"
2"	41.30	63	2"

PVC-U Y-TEE

斜三通，PVC-U（美标）

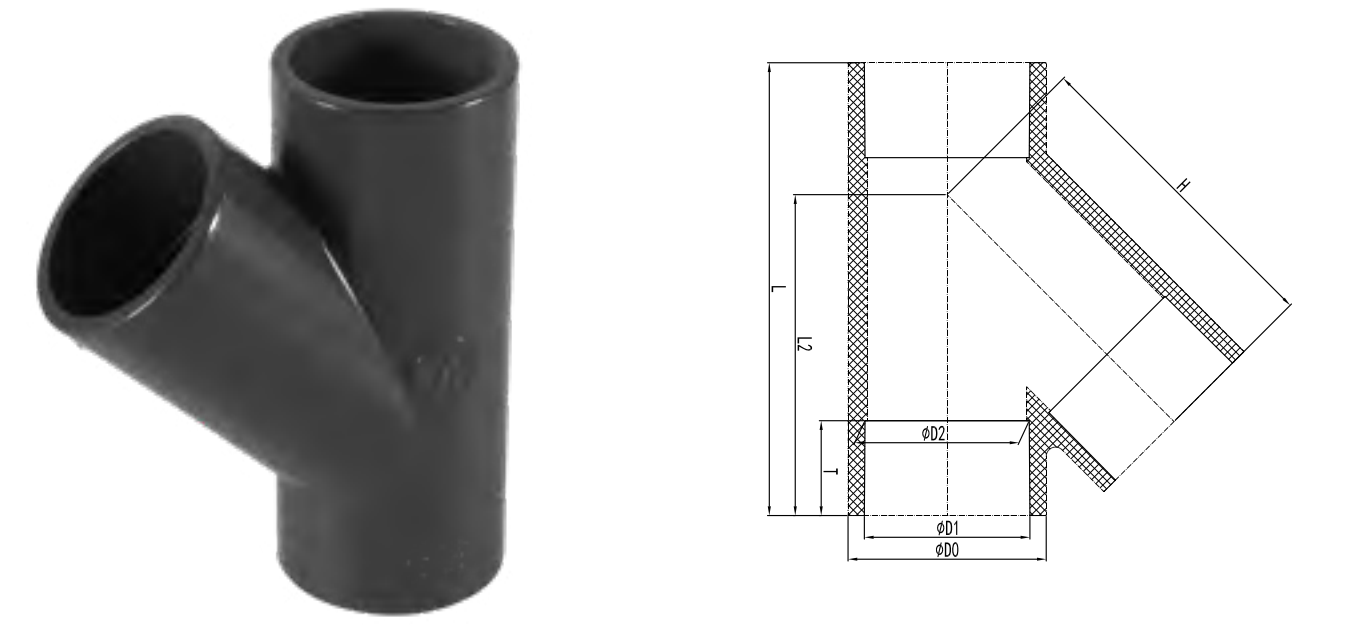


产品参数（国标 GB/T 4219.2） SPECIFICATIONS(DIN,ISO,GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）							压力等级 Pressure level
	D1	d1	d2	T	L	L2	H	
15(20)	29.10	20.30	19.95	23.22	82.50	53.22	53.22	PN16
20(25)	34.90	25.30	24.95	26.40	97.80	62.40	62.40	PN16
25(32)	42.90	32.30	31.90	29.58	114.20	74.58	74.58	PN16
32(40)	52.00	40.40	39.90	32.75	131.50	88.75	88.75	PN16
40(50)	60.00	50.40	49.90	35.93	149.90	101.93	101.93	PN16
50(63)	75.00	63.40	62.90	39.10	177.20	124.10	124.10	PN16
65(75)	91.00	75.40	74.90	45.50	210.00	146.50	146.50	PN16
80(90)	107.00	90.50	89.90	51.20	244.50	173.20	173.20	PN16
100(110)	134.00	110.60	109.90	61.20	298.50	210.20	210.20	PN16
125(140)	168.00	140.70	139.90	76.20	376.40	266.20	266.20	PN16
150(160)	191.00	160.80	159.90	86.20	426.40	299.20	299.20	PN16
200(225)	260.00	226.20	224.90	118.70	587.40	414.70	414.70	PN16

产品参数（美标 SCH80） SPECIFICATIONS(ASTM D2467 SCH80)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）						
	D1	d1	d2	T	L	L2	H
1/2"	29.10	21.54	21.23	23.22	82.50	53.22	53.22
3/4"	34.90	26.87	26.57	26.40	97.80	62.40	62.40
1"	42.90	33.66	33.27	29.58	114.20	74.58	74.58
1-1/4"	52.00	42.42	42.02	32.75	131.50	88.75	88.75
1-1/2"	60.00	48.56	48.11	35.93	149.90	101.93	101.93
2"	75.00	60.63	60.17	39.10	177.20	124.10	124.10
2-1/2"	91.00	73.38	72.85	45.50	210.00	146.50	146.50
3"	107.00	89.31	88.70	51.20	244.50	173.20	173.20
4"	134.00	114.76	114.07	61.20	298.50	210.20	210.20
5"	168.00	141.81	141.04	76.20	376.40	266.20	266.20
6"	191.00	168.83	168.00	86.20	426.40	299.20	299.20
8"	260.00	219.84	218.69	118.70	587.40	414.70	414.70

PVC-U/C
SOCKET TRUE UNION BALL VALVE
插口式双由令球阀, PVC-U/C (国标, 美标, 日标)

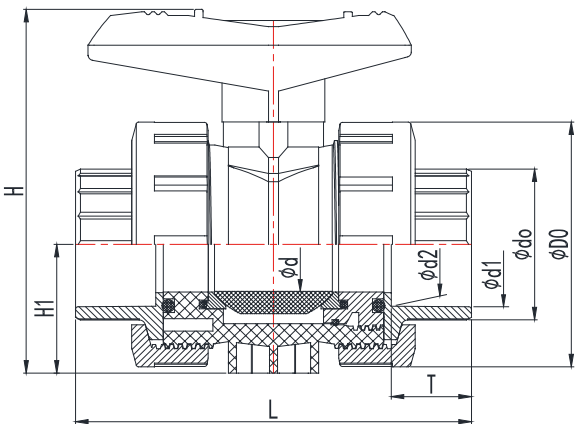

产品介绍

阀门描述
Valve Description

- 1. 材质: PVC -U/C
Material: PVC -U/C
- 2. 尺寸: DN15-100 1/ 2" -4" 16A-100A
Size: DN15-100 1/ 2" -4" 16A-100A
- 3. 标准: 国标, 美标, 日标
Standard: DIN,ASTM,JIS,GB/T4219.2
- 4. 连接: 插口
Connection: socket
- 5. 颜色: 把手红色, 本体: 深灰
Color: handle red, body: dark gray

产品特性
Product Features

- 1. 开关扭力小
Small switch torque
- 2. 简单经济
Compact and economical
- 3. 材料经过纳米改性, 提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
- 4. 阀体加厚处理, 抗压性能高
Thickened valve body for high compression resistance
- 5. 阀门出厂 100% 压力测试
100% pressure test before delivery

阀门 VALVE

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）								
	D0	d0	d1	d2	d	T	H1	H	L
15(20)	51.50	27.40	20.30	19.95	15.50	17.00	26.30	82.80	95.50
20(25)	59.00	32.70	25.30	24.95	20.50	19.50	30.60	92.80	109.10
25(32)	70.00	41.30	32.30	31.90	26.00	23.00	39.10	109.20	122.60
32(40)	85.40	49.60	40.35	39.90	33.00	27.00	44.20	131.80	147.30
40(50)	98.90	60.20	50.35	49.90	39.00	32.00	52.20	143.20	158.80
50(63)	122.20	76.00	63.40	62.90	51.00	38.50	71.30	175.70	182.80
65(75)	158.60	89.60	75.40	74.90	64.00	44.50	82.80	231.50	234.00
80(90)	192.10	105.40	90.50	89.90	81.00	52.00	99.30	260.60	255.00
100(110)	223.60	128.40	110.60	109.90	99.00	62.00	115.20	292.10	297.00

产品参数（美标 SCH80）

SPECIFICATIONS (ASTM SCH80)

尺寸 Size (*)	外形尺寸 Dimensions（mm）								
	D0	d0	d1	d2	d	H1	H	T	L
1/2"	51.50	27.40	21.54	21.23	15.50	26.30	82.80	23.22	107.90
3/4"	59.00	32.70	26.87	26.57	20.50	30.60	92.80	26.40	122.90
1"	70.00	41.30	33.66	33.27	26.00	39.10	109.20	29.57	135.70
1-1/4"	85.40	49.60	42.42	42.04	33.00	44.20	131.80	32.75	158.80
1-1/2"	98.90	60.20	48.56	48.11	39.00	52.20	143.20	32.00	166.80
2"	122.20	76.00	60.63	60.17	51.00	71.30	175.70	39.10	182.80
2-1/2"	158.60	89.60	73.38	72.85	64.00	82.80	231.50	44.50	236.00
3"	192.10	105.40	89.31	88.70	81.00	99.30	260.60	48.60	249.00
4"	223.60	128.40	114.76	114.07	99.00	115.20	292.10	58.15	289.00

产品参数（日标）



SPECIFICATONS (JIS)

尺寸 Size A	外形尺寸 Dimensions（mm）								
	D0	d0	d1	d2	d	H1	H	T	L
16	51.50	30.50	22.40	21.60	15.50	26.30	82.80	30.00	121.80
20	59.00	34.11	26.45	25.51	20.50	30.60	92.80	35.00	140.60
25	70.00	41.30	32.66	31.50	26.00	39.10	109.20	40.00	157.10
30	85.40	48.16	38.60	37.43	33.00	44.20	131.80	44.00	184.00
40	98.90	59.10	48.85	47.38	39.00	52.20	143.20	55.00	207.20
50	122.20	72.10	61.00	59.27	51.00	71.30	175.70	63.00	235.00
65	158.60	89.23	77.10	75.73	64.00	82.80	231.50	63.00	273.00
75	192.10	105.33	89.60	88.58	81.00	99.30	260.60	64.00	279.00
100	223.60	133.07	114.70	113.55	99.00	115.20	292.10	84.00	342.60

配件明细


PARTS LIST

序号 NO.	名称 Name	数量 Quantity	材料 Material
01	手柄 Lever	1	PVC-U/PP+GF30
02	连接杆 Shaft	1	PVC-U/C
03	螺帽 Nut	2	PVC-U/C
04	承口 Faucet	2	PVC-U/C
05	阀体 Body	1	PVC-U/C
06	球心 Ball	1	PVC-U/C
07	止泻圈 Ball Seat	2	PTFE
08	O 型圈 1 O-ring1	2	EPDM/FPM
09	O 型圈 2 O-ring2	2	EPDM/FPM
10	调节单盖 Seal Carrier	1	PVC-U/C
11	O 型圈 3 O-ring3	1	EPDM/FPM
12	O 型圈 4 O-ring4	2	EPDM/FPM

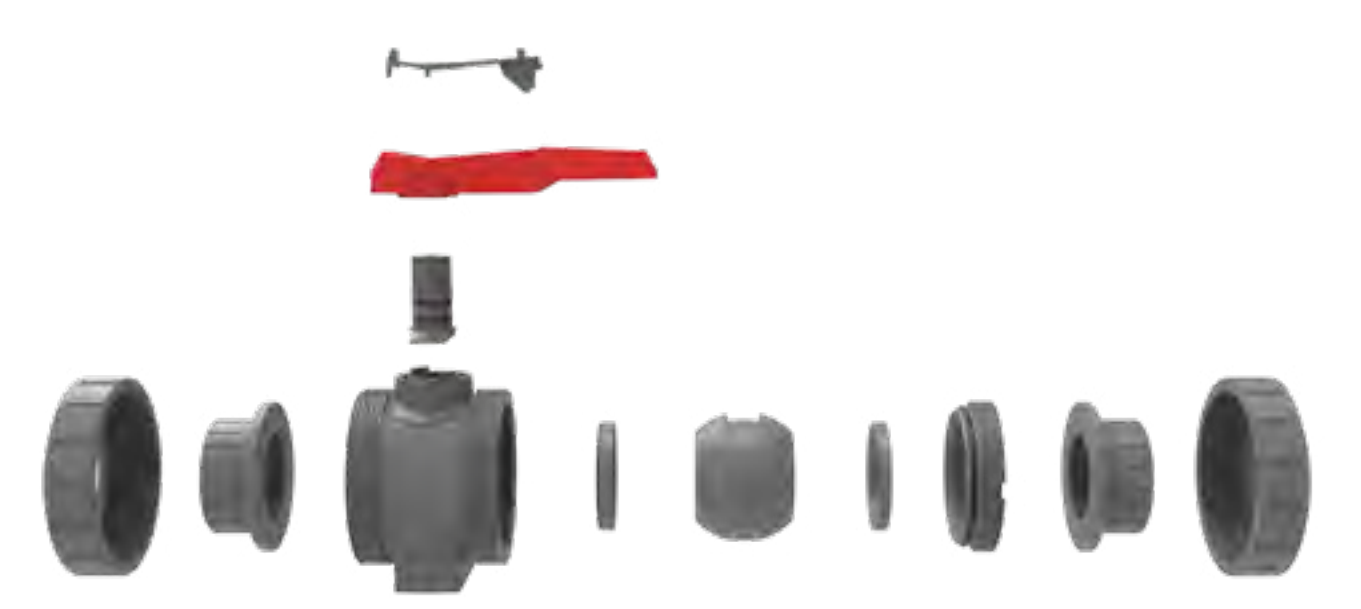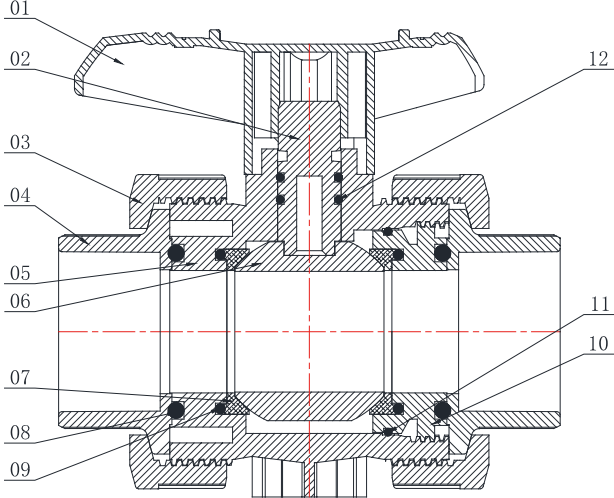

PVC-U/C THREADED TRUE UNION BALL VALVE

丝口式双由令球阀，PVC-U/C (国标，美标，日标)

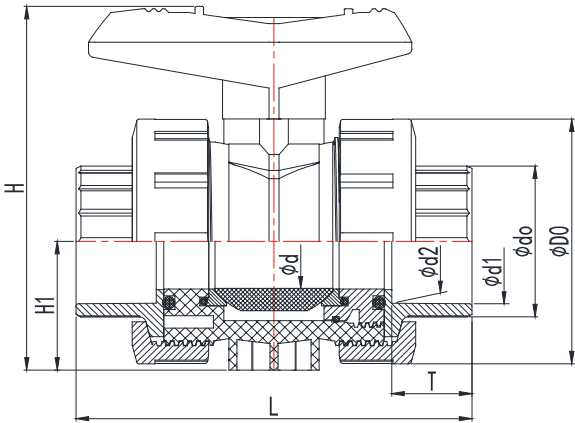

产品介绍

阀门描述 Valve Description

1. 材质：PVC -U/C
Material: PVC -U/C
2. 尺寸：DN15-100 1/ 2" -4" 16A-100A
Size: DN15-100 1/ 2" -4" 16A-100A
3. 标准：国标，美标，日标
Standard: DIN,ASTM,JIS,GB/T4219.2
4. 连接：丝口
Connection: Threaded connection
5. 颜色：把手红色，本体深灰
Color: handle red, body dark gray

产品特性 Product Features

1. 开关扭力小
Small switch torque
2. 简单经济
Compact and economical
3. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
4. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
5. 阀门出厂 100% 压力测试
100% pressure test before delivery

产品参数 (国标 GB/T 4219.2) SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions (mm)								
	D0	d0	d3	d	H1	H	T	L	Tr 螺纹 PT
15(20)	51.50	30.43	16.00	15.50	26.30	82.80	17.00	95.50	1/2"
20(25)	59.00	36.30	20.60	20.50	30.60	92.80	19.50	109.10	3/4"
25(32)	70.00	44.61	26.00	26.00	39.10	109.20	23.00	122.60	1"
32(40)	85.40	53.87	33.00	33.00	44.20	131.80	27.00	147.30	1-1/4"
40(50)	98.90	61.12	39.00	39.00	52.20	143.20	32.00	158.80	1-1/2"
50(63)	122.20	73.83	51.00	51.00	71.30	175.70	38.50	182.80	2"
65(75)	158.60	87.71	64.00	64.00	82.80	231.50	44.50	234.00	2-1/2"
80(90)	192.10	106.81	81.00	81.00	99.30	260.60	52.00	255.00	3"
100(110)	223.60	133.46	99.00	99.00	115.20	292.10	62.00	297.00	4"

产品参数 (美标 SCH80) SPECIFICATIONS (ASTM SCH80)


尺寸 Size (* ")	外形尺寸 Dimensions (mm)										
	D0	d0	d1	d2	d3	d	H1	H	T	L	Tr 螺纹 NPT
1/2"	51.50	30.43	20.95	18.63	16.00	15.50	26.30	82.80	17.00	95.50	1/2"
3/4"	59.00	36.30	26.44	24.12	20.60	20.50	30.60	92.80	19.50	109.10	3/4"
1"	70.00	44.61	33.25	30.29	26.00	26.00	39.10	109.20	23.00	122.60	1"
1-1/4"	85.40	53.87	41.91	38.95	33.00	33.00	44.20	131.80	27.00	147.30	1-1/4"
1-1/2"	98.90	61.12	47.80	44.85	39.00	39.00	52.20	143.20	32.00	158.80	1-1/2"
2"	122.20	73.83	59.61	56.66	51.00	51.00	71.30	175.70	38.50	182.80	2"
2-1/2"	158.60	87.71	75.18	74.23	64.00	64.00	82.80	231.50	44.50	234.00	2-1/2"
3"	192.10	106.81	87.88	84.93	81.00	81.00	99.30	260.60	52.00	255.00	3"
4"	223.60	133.46	113.03	110.07	99.00	99.00	115.20	292.10	62.00	297.00	4"

产品参数 (日标) SPECIFICATONS (JIS)

尺寸 Size A	外形尺寸 Dimensions (mm)										
	D0	d0	d1	d2	d3	d	H1	H	T	L	Tr 螺纹
16	51.50	30.43	20.95	18.63	16.00	15.50	26.30	82.80	17.00	95.50	1/2"
20	59.00	36.30	26.44	24.12	20.60	20.50	30.60	92.80	19.50	109.10	3/4"
25	70.00	44.61	33.25	30.29	26.00	26.00	39.10	109.20	23.00	122.60	1"
30	85.40	53.87	41.91	38.95	33.00	33.00	44.20	131.80	27.00	147.30	1-1/4"
40	98.90	61.12	47.80	44.85	39.00	39.00	52.20	143.20	32.00	158.80	1-1/2"
50	122.20	73.83	59.61	56.66	51.00	51.00	71.30	175.70	38.50	182.80	2"
65	158.60	87.71	75.18	74.23	64.00	64.00	82.80	231.50	44.50	234.00	2-1/2"
75	192.10	106.81	87.88	84.93	81.00	81.00	99.30	260.60	52.00	255.00	3"
100	223.60	133.46	113.03	110.07	99.00	99.00	115.20	292.10	62.00	297.00	4"

配件明细 PARTS LIST


序号 NO.	名称 Name	数量 Quantity	材料 Material
01	手柄 Lever	1	PVC-U/PP+GF30
02	连接杆 Shaft	1	PVC-U/C
03	螺帽 Nut	2	PVC-U/C
04	承口 Faucet	2	PVC-U/C
05	阀体 Body	1	PVC-U/C
06	球心 Ball	1	PVC-U/C
07	止泻圈 Ball Seat	2	PTFE
08	O 型圈 1 O-ring1	2	EPDM/FPM
09	O 型圈 2 O-ring2	2	EPDM/FPM
10	调节单盖 Seal Carrier	1	PVC-U/C
11	O 型圈 3 O-ring3	1	EPDM/FPM
12	O 型圈 4 O-ring4	2	EPDM/FPM

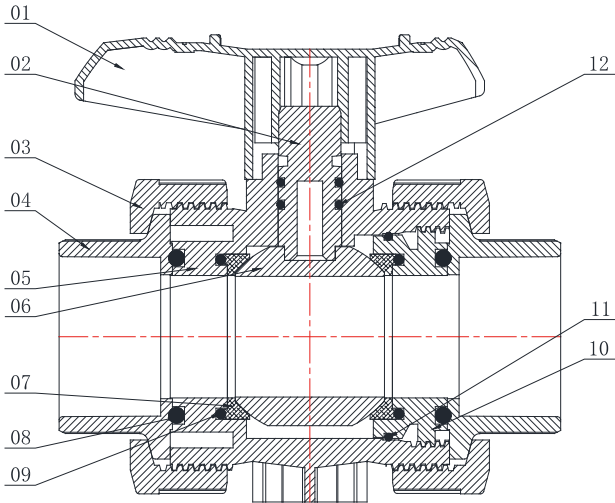

EXPERT IN PIPING SYSTEM

管路系统专家

PVC-U/C
 FLANGED TRUE UNION BALL VALVE
 法兰式双由令球阀, PVC-U/C (国标, 美标, 日标)

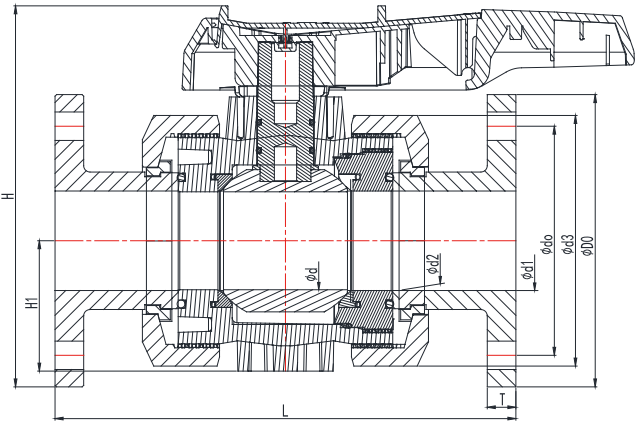

产品介绍

阀门描述
 Valve Description

1. 材质: PVC -U/C
Material: PVC -U/C
2. 尺寸: DN15-100 , 1/2" ~4, 16A~100A
Size: DN15-100 , 1/2"~4 , 16A~100A
3. 标准: 国标, 美标 ASTM , 日标 JIS
Standard: DIN,ASTM,JIS,GB/T4219.2
4. 连接: 法兰
Connection: Flanged connection
5. 颜色: 把手红色, 本体: 深灰
Color: handle red, body: dark gray

产品特性
 Product Features

1. 开关扭力小
Small switch torque
2. 简单经济
Compact and economical
3. 材料经过纳米改性, 提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
4. 阀体加厚处理, 抗压性能高
Thickened valve body for high compression resistance
5. 阀门出厂 100% 压力测试
100% pressure test before delivery

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）												
	D0	d0	d1	d2	d3	d	H1	H	T	L	法兰中心距 Center distance	法兰孔径 Diameter	法兰孔数量 Number of holes
15(20)	95.00	65.00	20.30	19.95	51.50	15.50	26.30	103.90	13.00	143.00	65.00	14.00	4
20(25)	105.00	75.00	25.30	24.95	59.00	20.50	30.60	114.66	14.00	172.00	75.00	14.00	4
25(32)	115.00	85.00	32.30	31.90	70.00	26.00	39.10	127.56	15.00	187.00	85.00	14.00	4
32(40)	140.00	100.00	40.35	39.90	85.40	33.00	44.20	157.51	15.00	190.00	100.00	16.00	4
40(50)	150.00	110.00	50.35	49.90	98.90	39.00	52.20	166.00	17.00	212.00	110.00	16.00	4
50(63)	165.00	125.00	63.40	62.90	122.20	51.00	71.30	197.50	17.00	234.00	125.00	19.00	4
65(75)	185.00	145.00	75.40	74.90	158.60	64.00	82.80	241.20	18.00	290.00	145.00	19.00	4
80(90)	200.00	160.00	90.50	89.90	192.10	81.00	99.30	261.20	18.00	310.00	160.00	19.00	8
100(110)	220.00	180.00	110.60	109.90	223.60	99.00	115.20	286.68	18.00	372.00	180.00	19.00	8

产品参数（美标 SCH80）

SPECIFICATIONS (ASTM SCH80)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）												
	D0	d0	d1	d2	d3	d	H1	H	T	L	法兰中心距 Center distance	法兰孔径 Diameter	法兰孔数量 Number of holes
1/2"	89.00	60.30	20.30	19.95	51.50	15.50	26.30	103.90	13.00	143.00	60.33	16.00	4
3/4"	89.00	69.85	25.30	24.95	59.00	20.50	30.60	114.66	14.00	172.00	69.85	16.00	4
1"	108.00	79.38	32.30	31.90	70.00	26.00	39.10	127.56	15.00	187.00	79.38	16.00	4
1-1/4"	117.00	88.90	40.35	39.90	85.40	33.00	44.20	157.51	15.00	190.00	88.90	18.00	4
1-1/2"	127.00	98.43	50.35	49.90	98.90	39.00	52.20	166.00	17.00	212.00	98.43	18.00	4
2"	152.00	120.65	63.40	62.90	122.20	51.00	71.30	197.50	17.00	234.00	120.65	18.00	4
2-1/2"	178.00	139.70	75.40	74.90	158.60	64.00	82.80	241.20	18.00	290.00	139.70	18.00	4
3"	191.00	152.40	90.50	89.90	192.10	81.00	99.30	261.20	18.00	310.00	152.40	18.00	4
4"	229.00	190.50	110.60	109.90	223.60	99.00	115.20	286.68	18.00	372.00	190.50	18.00	8

产品参数（日标）


SPECIFICATONS (JIS)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）												
	D0	d0	d1	d2	d3	d	H1	H	T	L	法兰中心距 Center distance	法兰孔径 Diameter	法兰孔数量 Number of holes
16A	95.00	70.00	22.40	19.95	51.50	15.00	26.30	103.90	15.00	145.00	70.00	15.00	4
20A	100.00	75.00	26.45	24.95	59.00	20.00	30.60	114.66	15.00	175.00	75.00	15.00	4
25A	125.00	90.00	32.55	31.90	70.00	25.00	39.10	127.56	15.00	190.00	90.00	19.00	4
30A	135.00	100.00	38.60	39.90	85.40	30.00	44.20	157.51	16.00	195.00	100.00	19.00	4
40A	140.00	105.00	48.70	49.90	98.90	40.00	52.20	166.00	17.00	220.00	105.00	19.00	4
50A	155.00	120.00	60.80	62.90	122.20	50.00	71.30	197.50	21.00	234.00	120.00	19.00	4
65A	175.00	140.00	76.80	74.90	158.60	63.00	82.80	241.20	22.00	300.00	140.00	19.00	4
75A	185.00	150.00	89.60	89.90	192.10	80.00	99.30	261.20	22.00	320.00	150.00	19.00	8
100A	210.00	175.00	114.70	109.90	223.60	100.00	115.20	286.68	22.00	387.00	175.00	19.00	8

配件明细


PARTS LIST

序号 NO.	名称 Name	数量 Quantity	材料 Material
01	手柄 Lever	1	PVC-U/PP+GF30
02	连接杆 Shaft	1	PVC-U/C
03	螺帽 Nut	2	PVC-U/C
04	法兰头 Flange	2	PVC-U/C
05	阀体 Body	1	PVC-U/C
06	球心 Ball	1	PVC-U/C
07	止泻圈 Ball Seat	2	PTFE
08	O 型圈 1 O-ring1	2	EPDM/FPM
09	调节单盖 Seal Carrier	1	PVC-U/C
10	O 型圈 2 O-ring2	2	EPDM/FPM
11	O 型圈 3 O-ring3	1	EPDM/FPM
12	固定卡环 Fixed snap ring	2	PVC-U/C
13	O 型圈 4 O-ring4	2	EPDM/FPM

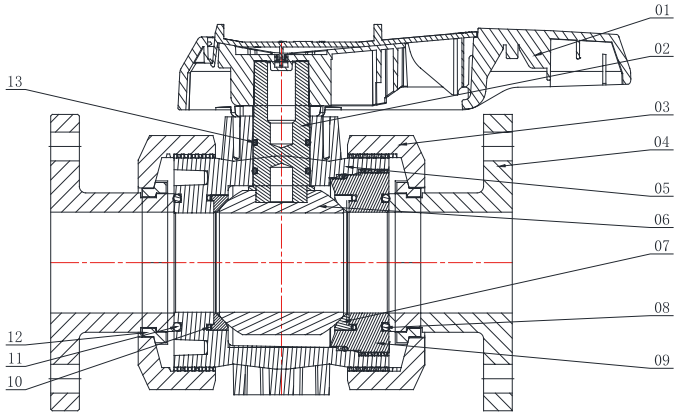

PVC-U/C
PNEUMATIC SOCKET TRUE UNION BALL VALVE

气动插口式双由令球阀，PVC-U/C（国标，美标，日标）

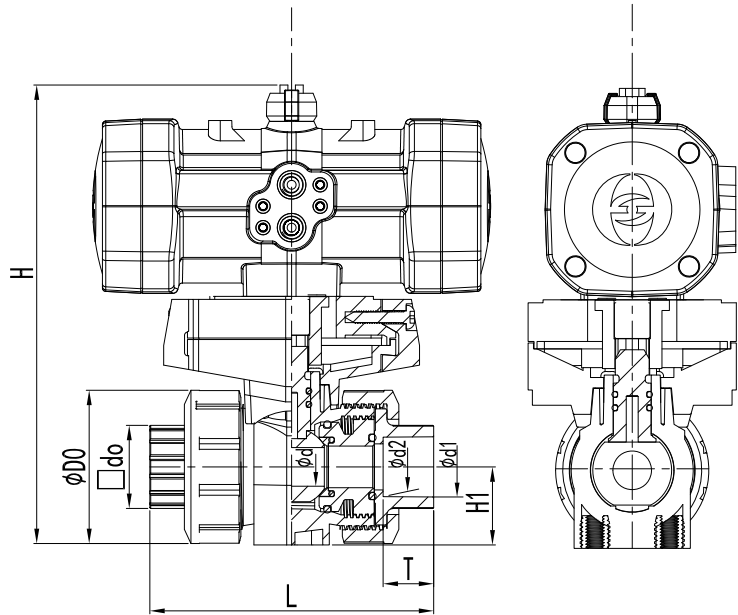

产品介绍

阀门描述
Valve Description

1. 材质：PVC -U/C
Material: PVC -U/C
2. 尺寸：DN15-100 1/ 2" -4" 16A-100A
Size: DN15-100 1/ 2" -4" 16A-100A
3. 标准：国标，美标，日标
Standard: DIN,ASTM,JIS,GB/T4219.2
4. 连接：插口
Connection: socket
5. 颜色：本体：灰
Color: body: gray
6. 全塑气动执行器耐腐蚀
Whole plastic actuator shell for better corrosion resistance

产品特性
Product Features

1. 开关扭力小
Small switch torque
2. 部件可更换，简单经济
Replaceable parts, compact and economical
3. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
4. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
5. 阀门出厂 100% 压力测试
100% pressure test before delivery
6. 执行器进行 300 万次开启关闭试验
Actuator passed 3000,000 opening and closing tests
7. 可以选配单作用执行器及各种电磁阀，回讯位置开关
Optional single-acting actuator and various solenoid valves, position monitoring switch

产品参数（国标 GB/T 4219.2） SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）								
	D0	d0	d1	d2	d	H1	H	T	L
15(20)	51.50	27.40	20.30	19.95	15.50	26.30	156.50	17.00	95.50
20(25)	59.00	32.70	25.30	24.95	20.50	30.60	194.00	19.50	109.10
25(32)	70.00	41.30	32.30	31.90	26.00	39.10	210.00	23.00	122.60
32(40)	85.40	49.60	40.35	39.90	33.00	44.20	243.40	27.00	147.30
40(50)	98.90	60.20	50.35	49.90	39.00	52.20	268.90	32.00	158.80
50(63)	122.20	76.00	63.40	62.90	51.00	71.30	301.20	38.50	182.80
65(75)	158.60	89.60	75.40	74.90	64.00	82.80	373.60	44.50	234.00
80(90)	192.10	105.40	90.50	89.90	81.00	99.30	430.10	52.00	255.00
100(110)	223.60	128.40	110.60	109.90	99.00	115.20	493.60	62.00	297.00

产品参数（美标 SCH80） SPECIFICATIONS (ASTM SCH80)


尺寸 Size (*")	外形尺寸 Dimensions（mm）								
	D	d0	d1	d2	d	H1	H	T	L
1/2"	51.50	27.40	21.54	21.23	15.50	26.30	156.50	23.22	107.90
3/4"	59.00	32.70	26.87	26.57	20.50	30.60	194.00	26.40	122.90
1"	70.00	41.30	33.66	33.27	26.00	39.10	210.00	29.57	135.70
1-1/4"	85.40	49.60	42.42	42.04	33.00	44.20	243.40	32.75	158.80
1-1/2"	98.90	60.20	48.56	48.11	39.00	52.20	268.90	32.00	166.80
2"	122.20	76.00	60.63	60.17	51.00	71.30	301.20	39.10	182.80
2-1/2"	158.60	89.60	73.38	72.85	64.00	82.80	373.60	44.50	236.00
3"	192.10	105.40	89.31	88.70	81.00	99.30	430.10	48.60	249.00
4"	223.60	128.40	114.76	114.07	99.00	115.20	493.60	58.15	289.00

产品参数（日标） SPECIFICATONS (JIS)

尺寸 Size A	外形尺寸 Dimensions（mm）								
	D0	d0	d1	d2	d	H1	H	T	L
16	51.50	30.50	22.40	21.60	15.50	26.30	156.50	30.00	121.80
20	59.00	34.11	26.45	25.51	20.50	30.60	194.00	35.00	140.60
25	70.00	41.30	32.66	31.50	26.00	39.10	210.00	40.00	157.10
30	85.40	48.16	38.60	37.43	33.00	44.20	243.40	44.00	184.00
40	98.90	59.10	48.85	47.38	39.00	52.20	268.90	55.00	207.20
50	122.20	72.10	61.00	59.27	51.00	71.30	301.20	63.00	235.00
65	158.60	89.23	77.10	75.73	64.00	82.80	373.60	63.00	273.00
75	192.10	105.33	89.60	88.58	81.00	99.30	430.10	64.00	279.00
100	223.60	133.07	114.70	113.55	99.00	115.20	493.60	84.00	342.60


配件明细 PARTS LIST

序号 NO.	名称 Name	数量 Quantity	材料 Material
01	气动执行器 Pneumatic Actuator	1	铝合金 / 塑料 Aluninum alloy/plastic
02	连接件上盖 Actuator adaptor top cover	1	PPS+GF40%
03	螺栓 Bolt	2	Stainless steel 304
04	连接件下盖 Actuator adaptor bottom cover	1	PPS+GF40%
05	螺帽 Nut	2	PVC-U/C
06	承口 Faucet	2	PVC-U/C
07	调节单盖 Seal Carrier	1	PVC-U/C
08	止泻圈 Ball Seat	2	PTFE
09	O 型圈 1 O-ring1	2	EPDM/FPM
10	O 型圈 2 O-ring2	2	EPDM/FPM
11	O 型圈 3 O-ring3	1	EPDM/FPM
12	球心 Ball	1	PVC-U/C
13	O 型圈 4 O-ring4	2	EPDM/FPM
14	固定卡扣 Fixed buckle	2	PPS+GF40%
15	连接件 Actuator adaptor	1	PPS+GF40%
16	螺栓 Bolt	4	Stainless steel 304
17	阀体 Body	1	PVC-U/C

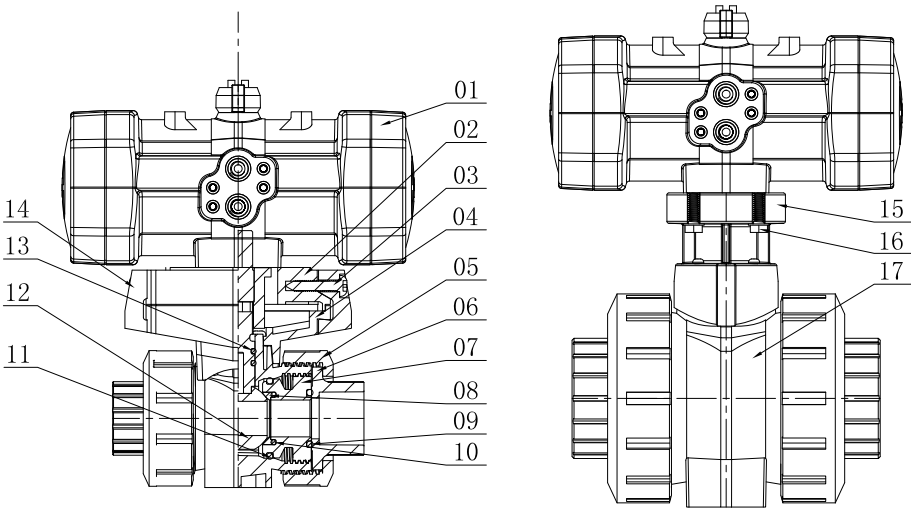

PVC-U/C
PNEUMATIC FLANGED TRUE UNION BALL VALVE

气动法兰式双由令球阀，PVC-U/C（国标，美标，日标）

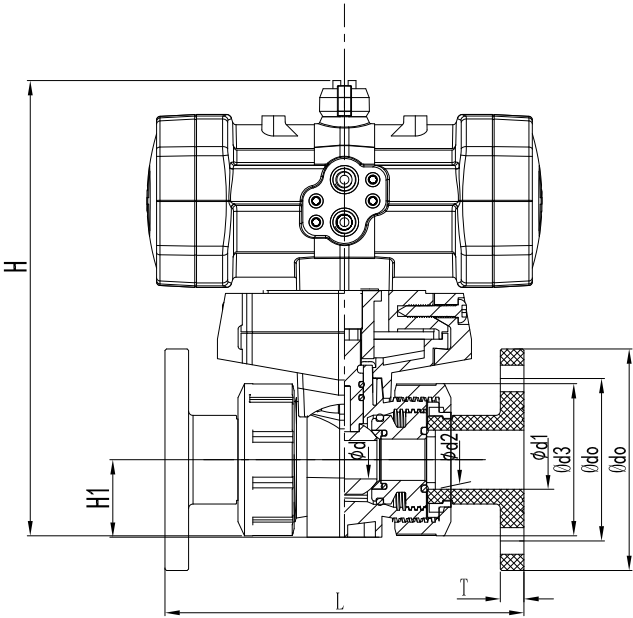

产品介绍

阀门描述
Valve Description

1. 材质：PVC -U/C

Material: PVC -U/C
2. 尺寸：DN15-100, 1/2" ~4, 16A~100A

Size: DN15-100, 1/2" ~4, 16A~100A
3. 标准：国标，美标，日标

Standard: DIN,ASTM,JIS,GB/T4219.2
4. 连接：法兰

Connection: Flanged connection
5. 颜色：本体：灰

Color: body: gray
6. 全塑气动执行器耐腐蚀

Whole plastic actuator shell for better corrosion resistance

产品特性
Product Features

1. 开关扭力小

Small switch torque
2. 部件可更换，简单经济

Replaceable parts, compact and economical
3. 材料经过纳米改性，提高产品的耐压性及抗冲击性

The material is nano-modified to improve the pressure resistance and impact resistance of the product
4. 阀体加厚处理，抗压性能高

Thickened valve body for high compression resistance
5. 阀门出厂 100% 压力测试

100% pressure test before delivery
6. 可以选配单作用执行器及各种电磁阀，回讯位置开关

Optional single-acting actuator and various solenoid valves, position monitoring switch
7. 执行器进行 300 万次开启关闭试验

Actuator passed 3000,000 opening and closing tests

产品参数（国标 GB/T 4219.2）SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）								
	D0	d0	d1	d2	d	H1	H	T	L
15(20)	95.00	65.00	20.30	19.95	15.50	26.30	178.25	13.00	143.00
20(25)	105.00	75.00	25.30	24.95	20.50	30.60	217.00	14.00	172.00
25(32)	115.00	85.00	32.30	31.90	26.00	39.10	232.50	15.00	187.00
32(40)	140.00	100.00	40.35	39.90	33.00	44.20	270.70	15.00	190.00
40(50)	150.00	110.00	50.35	49.90	39.00	52.20	294.45	17.00	212.00
50(63)	165.00	125.00	63.40	62.90	51.00	71.30	322.60	17.00	234.00
65(75)	185.00	145.00	75.40	74.90	64.00	82.80	386.80	18.00	290.00
80(90)	200.00	160.00	90.50	89.90	81.00	99.30	434.05	18.00	310.00
100(110)	220.00	180.00	110.60	109.90	99.00	115.20	491.80	18.00	372.00

产品参数（美标 SCH80）SPECIFICATIONS (ASTM SCH80)


尺寸 Size DN(De)	外形尺寸 Dimensions（mm）									
	D0	d0	d1	d2	d3	d	H1	H	T	L
1/2"	89.00	60.30	20.30	19.95	51.50	15.50	26.30	178.25	13.00	143.00
3/4"	89.00	69.85	25.30	24.95	59.00	20.50	30.60	217.00	14.00	172.00
1"	108.00	79.38	32.30	31.90	70.00	26.00	39.10	232.50	15.00	187.00
1-1/4"	117.00	88.90	40.35	39.90	85.40	33.00	44.20	270.70	15.00	190.00
1-1/2"	127.00	98.43	50.35	49.90	98.90	39.00	52.20	294.45	17.00	212.00
2"	152.00	120.65	63.40	62.90	122.20	51.00	71.30	322.60	17.00	234.00
2-1/2"	178.00	139.70	75.40	74.90	158.60	64.00	82.80	386.80	18.00	290.00
3"	191.00	152.40	90.50	89.90	192.10	81.00	99.30	434.05	18.00	310.00
4"	229.00	190.50	110.60	109.90	223.60	99.00	115.20	491.80	18.00	372.00

产品参数（日标）SPECIFICATONS (JIS)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）									
	D0	d0	d1	d2	d3	d	H1	H	T	L
16A	95.00	70.00	22.40	19.95	51.50	15.00	26.30	178.25	15.00	145.00
20A	100.00	75.00	26.45	24.95	59.00	20.00	30.60	217.00	15.00	175.00
25A	125.00	90.00	32.55	31.90	70.00	25.00	39.10	232.50	15.00	190.00
30A	135.00	100.00	38.60	39.90	85.40	30.00	44.20	270.70	16.00	195.00
40A	140.00	105.00	48.70	49.90	98.90	40.00	52.20	294.45	17.00	220.00
50A	155.00	120.00	60.80	62.90	122.20	50.00	71.30	322.60	21.00	234.00
65A	175.00	140.00	76.80	74.90	158.60	63.00	82.80	386.80	22.00	300.00
75A	185.00	150.00	89.60	89.90	192.10	80.00	99.30	434.05	22.00	320.00
100A	210.00	175.00	114.70	109.90	223.60	100.00	115.20	491.80	22.00	387.00

配件明细 PARTS LIST


序号 NO.	名称 Name	数量 Quantity	材料 Material
01	气动执行器 Pneumatic Actuator	1	铝合金 / 塑料 Aluminium alloy/Plastic
02	连接件上盖 Actuator adaptor top cover	1	PPS+GF40%
03	螺栓 Bolt	2	Stainless steel 304
04	连接件下盖 Actuator adaptor bottom cover	1	PPS+GF40%
05	螺帽 Nut	2	PVC-U/C
06	法兰头 Flange	2	PVC-U/C
07	调节单盖 Seal Carrier	1	PVC-U/C
08	止泻圈 Ball Seat	2	PTFE
09	O 型圈 1 O-ring1	2	EPDM/FPM
10	O 型圈 2 O-ring2	2	EPDM/FPM
11	O 型圈 3 O-ring3	1	EPDM/FPM
12	球心 Ball	1	PVC-U/C
13	O 型圈 4 O-ring4	2	EPDM/FPM
14	固定卡扣 Fixed buckle	2	PPS+GF40%
15	连接件 Actuator adaptor	1	PPS+GF40%
16	螺栓 Bolt	4	Stainless steel 304
17	阀体 Body	1	PVC-U/C
18	卡环 Snap ring	2	PVC-U/C

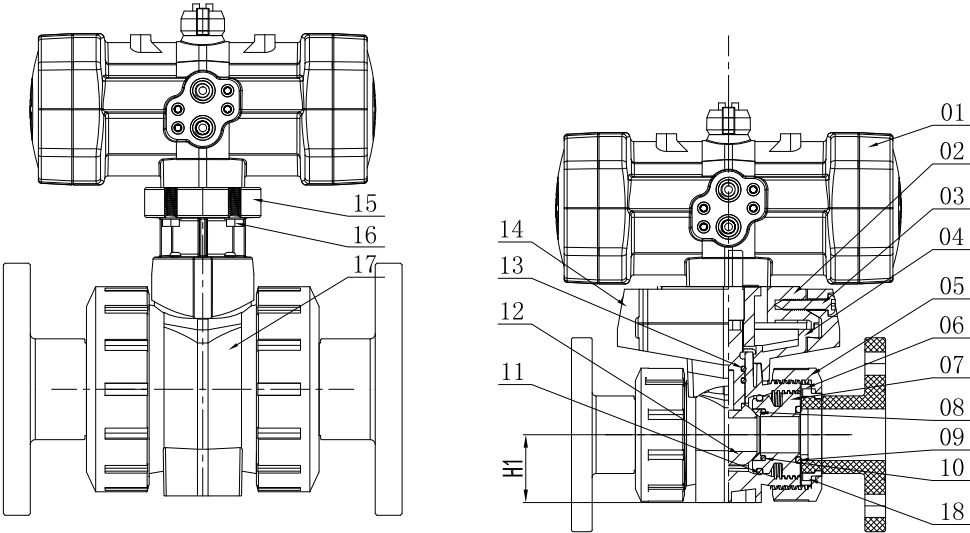

PVC-U/C

PNEUMATIC THREADED TRUE UNION BALL VALVE

气动丝口式双由令球阀，PVC-U/C（国标，美标，日标）

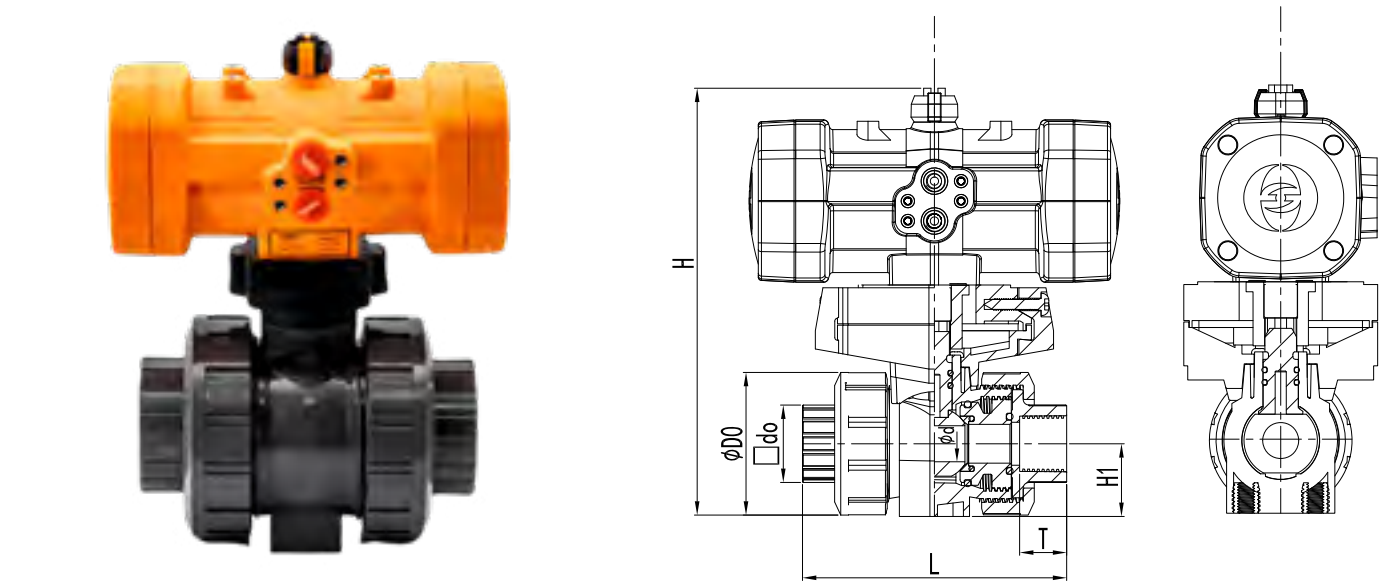

产品介绍

- 阀门描述
Valve Description
1. 材质：PVC -U/C
Material: PVC -U/C

2. 尺寸：DN15-100，1/2”~4，16A~100A
Size: DN15-100, 1/2”~4, 16A~100A

3. 标准：国标，美标，日标
Standard: DIN,ASTM,JIS,GB/T4219.2

4. 连接：法兰
Connection: Threaded connection

5. 颜色：本体：灰
Color: body: gray

6. 全塑气动执行器耐腐蚀
Whole plastic actuator shell for better corrosion resistance

- 产品特性
Product Features
1. 开关扭力小
Small switch torque

2. 部件可更换，简单经济
Replaceable parts, compact and economical

3. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product

4. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance

5. 阀门出厂 100% 压力测试
100% pressure test before delivery

6. 执行器进行 300 万次开启关闭试验
Actuator passed 3000,000 opening and closing tests

7. 可以选配单作用执行器及各种电磁阀，回讯位置开关
Optional single-acting actuator and various solenoid valves, position monitoring switch

产品参数（国标 GB/T 4219.2） SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）								
	D0	d0	d1	d2	d	H1	H	T	L
15(20)	51.50	30.43	20.95	18.63	15.50	26.30	156.50	17.00	95.50
20(25)	59.00	36.30	26.44	24.12	20.50	30.60	194.00	19.50	109.10
25(32)	70.00	44.61	33.25	30.29	26.00	39.10	210.00	23.00	122.60
32(40)	85.40	53.87	41.91	38.95	33.00	44.20	243.40	27.00	147.30
40(50)	98.90	61.12	47.80	44.85	39.00	52.20	268.90	32.00	158.80
50(63)	122.20	73.83	59.61	56.66	51.00	71.30	301.20	38.50	182.80
65(75)	158.60	87.71	75.18	74.23	64.00	82.80	373.60	44.50	234.00
80(90)	192.10	106.81	87.88	84.93	81.00	99.30	430.10	52.00	255.00
100(110)	223.60	133.46	113.03	110.07	99.00	115.20	493.60	62.00	297.00

产品参数（美标 SCH80） SPECIFICATIONS (ASTM SCH80)



尺寸 Size (")	外形尺寸 Dimensions（mm）								
	D	d0	d1	d2	d	H1	H	T	L
1/2"	51.50	30.43	20.95	18.63	15.50	26.30	156.50	17.00	95.50
3/4"	59.00	36.30	26.44	24.12	20.50	30.60	194.00	19.50	109.10
1"	70.00	44.61	33.25	30.29	26.00	39.10	210.00	23.00	122.60
1-1/4"	85.40	53.87	41.91	38.95	33.00	44.20	243.40	27.00	147.30
1-1/2"	98.90	61.12	47.80	44.85	39.00	52.20	268.90	32.00	158.80
2"	122.20	73.83	59.61	56.66	51.00	71.30	301.20	38.50	182.80
2-1/2"	158.60	87.71	75.18	74.23	64.00	82.80	373.60	44.50	234.00
3"	192.10	106.81	87.88	84.93	81.00	99.30	430.10	52.00	255.00
4"	223.60	133.46	113.03	110.07	99.00	115.20	493.60	62.00	297.00

产品参数（日标） SPECIFICATONS (JIS)

尺寸 Size A	外形尺寸 Dimensions（mm）								
	D0	d0	d1	d2	d	H1	H	T	L
16	51.50	30.43	20.95	18.63	15.50	26.30	156.50	17.00	95.50
20	59.00	36.30	26.44	24.12	20.50	30.60	194.00	19.50	109.10
25	70.00	44.61	33.25	30.29	26.00	39.10	210.00	23.00	122.60
30	85.40	53.87	41.91	38.95	33.00	44.20	243.40	27.00	147.30
40	98.90	61.12	47.80	44.85	39.00	52.20	268.90	32.00	158.80
50	122.20	73.83	59.61	56.66	51.00	71.30	301.20	38.50	182.80
65	158.60	87.71	75.18	74.23	64.00	82.80	373.60	44.50	234.00
75	192.10	106.81	87.88	84.93	81.00	99.30	430.10	52.00	255.00
100	223.60	133.46	113.03	110.07	99.00	115.20	493.60	62.00	297.00


配件明细 PARTS LIST

序号 NO.	名称 Name	数量 Quantity	材料 Material
01	气动执行器 Pneumatic Actuator	1	铝合金 / 塑料 Aluninum alloy/plastic
02	连接件上盖 Actuator adaptor top cover	1	PPS+GF40%
03	螺栓 Bolt	2	Stainless steel 304
04	连接件下盖 Actuator adaptor bottom cover	1	PPS+GF40%
05	螺帽 Nut	2	PVC-U/C
06	承口 Faucet	2	PVC-U/C
07	调节单盖 Seal Carrier	1	PVC-U/C
08	止泻圈 Ball Seat	2	PTFE
09	O 型圈 1 O-ring1	2	EPDM/FPM
10	O 型圈 2 O-ring2	2	EPDM/FPM
11	O 型圈 3 O-ring3	1	EPDM/FPM
12	球心 Ball	1	PVC-U/C
13	O 型圈 4 O-ring4	2	EPDM/FPM
14	固定卡扣 Fixed buckle	2	PPS+GF40%
15	连接件 Actuator adaptor	1	PPS+GF40%
16	螺栓 Bolt	4	Stainless steel 304
17	阀体 Body	1	PVC-U/C

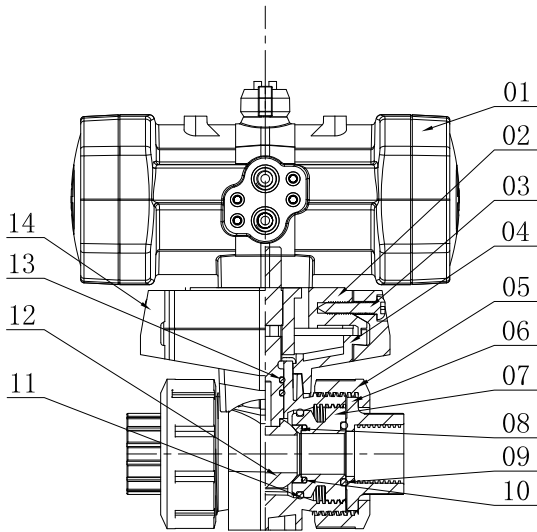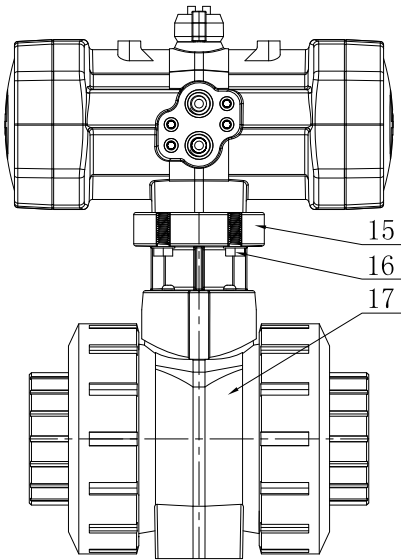

PVC-U/C
 ELECTRIC SOCKET TRUE UNION BALL VALVE

电动插口式双由令球阀，PVC-U/C（国标，美标，日标）

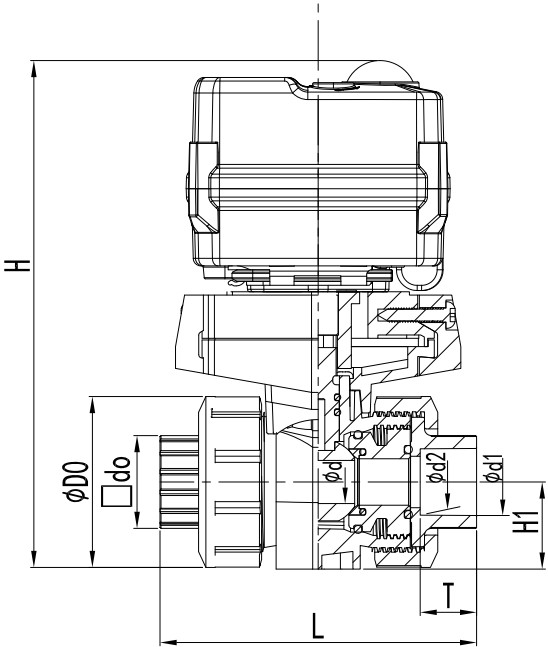

产品介绍

阀门描述
 Valve Description

- 材质：PVC -U/C
Material: PVC -U/C
- 尺寸：DN15-100 1/ 2" -4" 16A-100A
Size: DN15-100 1/ 2" -4" 16A-100A
- 标准：国标，美标，日标
Standard: DIN,ASTM,JIS,GB/T4219.2
- 连接：插口
Connection: socket
- 颜色：本体：灰
Color: body: gray
- 全塑气动执行器耐腐蚀
Whole plastic actuator shell for better corrosion resistance

产品特性
 Product Features

- 开关扭力小
Small switch torque
- 部件可更换，简单经济
Replaceable parts, compact and economical
- 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
- 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
- 阀门出厂 100% 压力测试
100% pressure test before delivery
- 可以选配调节型，防爆及各种不同电压执行器
Optional adjustment, explosion-proof and various voltage actuators

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions (mm)								
	D0	d0	d1	d2	d	H1	H	T	L
15(20)	51.50	27.40	20.30	19.95	15.50	26.30	201.50	17.00	95.50
20(25)	59.00	32.70	25.30	24.95	20.50	30.60	209.00	19.50	109.10
25(32)	70.00	41.30	32.30	31.90	26.00	39.10	220.00	23.00	122.60
32(40)	85.40	49.60	40.35	39.90	33.00	44.20	235.40	27.00	147.30
40(50)	98.90	60.20	50.35	49.90	39.00	52.20	248.90	32.00	158.80
50(63)	122.20	76.00	63.40	62.90	51.00	71.30	272.20	38.50	182.80
65(75)	158.60	89.60	75.40	74.90	64.00	82.80	353.60	44.50	234.00
80(90)	192.10	105.40	90.50	89.90	81.00	99.30	397.10	52.00	255.00
100(110)	223.60	128.40	110.60	109.90	99.00	115.20	438.60	62.00	297.00

产品参数（美标 SCH80）

SPECIFICATIONS (ASTM SCH80)

尺寸 Size (*)	外形尺寸 Dimensions (mm)								
	D0	d0	d1	d2	d	H1	H	T	L
1/2"	51.50	27.40	21.54	21.23	15.50	26.30	201.50	23.22	107.90
3/4"	59.00	32.70	26.87	26.57	20.50	30.60	209.00	26.40	122.90
1"	70.00	41.30	33.66	33.27	26.00	39.10	220.00	29.57	135.70
1-1/4"	85.40	49.60	42.42	42.04	33.00	44.20	235.40	32.75	158.80
1-1/2"	98.90	60.20	48.56	48.11	39.00	52.20	248.90	32.00	166.80
2"	122.20	76.00	60.63	60.17	51.00	71.30	272.20	39.10	182.80
2-1/2"	158.60	89.60	73.38	72.85	64.00	82.80	353.60	44.50	236.00
3"	192.10	105.40	89.31	88.70	81.00	99.30	397.10	48.60	249.00
4"	223.60	128.40	114.76	114.07	99.00	115.20	438.60	58.15	289.00

产品参数（日标）


SPECIFICATONS (JIS)

尺寸 Size A	外形尺寸 Dimensions (mm)								
	D0	d0	d1	d2	d	H1	H	T	L
16	51.50	30.50	22.40	21.60	15.50	26.30	201.50	30.00	121.80
20	59.00	34.11	26.45	25.51	20.50	30.60	209.00	35.00	140.60
25	70.00	41.30	32.66	31.50	26.00	39.10	220.00	40.00	157.10
30	85.40	48.16	38.60	37.43	33.00	44.20	235.40	44.00	184.00
40	98.90	59.10	48.85	47.38	39.00	52.20	248.90	55.00	207.20
50	122.20	72.10	61.00	59.27	51.00	71.30	272.20	63.00	235.00
65	158.60	89.23	77.10	75.73	64.00	82.80	353.60	63.00	273.00
75	192.10	105.33	89.60	88.58	81.00	99.30	397.10	64.00	279.00
100	223.60	133.07	114.70	113.55	99.00	115.20	438.60	84.00	342.60

配件明细


PARTS LIST

序号 NO.	名称 Name	数量 Quantity	材料 Material
01	电动执行器 Electric Actuator	1	铝合金 / 塑料 Aluninum alloy/plastic
02	连接件上盖 Actuator adaptor top cover	1	PPS+GF40%
03	螺栓 Bolt	2	Stainless steel 304
04	连接件下盖 Actuator adaptor bottom cover	1	PPS+GF40%
05	螺帽 Nut	2	PVC-U/C
06	承口 Faucet	2	PVC-U/C
07	调节单盖 Seal Carrier	1	PVC-U/C
08	止泻圈 Ball Seat	2	PTFE
09	O 型圈 1 O-ring1	2	EPDM/FPM
10	O 型圈 2 O-ring2	2	EPDM/FPM
11	O 型圈 3 O-ring3	1	EPDM/FPM
12	球心 Ball	1	PVC-U/C
13	O 型圈 4 O-ring4	2	EPDM/FPM
14	固定卡扣 Fixed buckle	2	PPS+GF40%
15	连接件 Actuator adaptor	1	PPS+GF40%
16	螺栓 Bolt	4	Stainless steel 304
17	阀体 Body	1	PVC-U/C

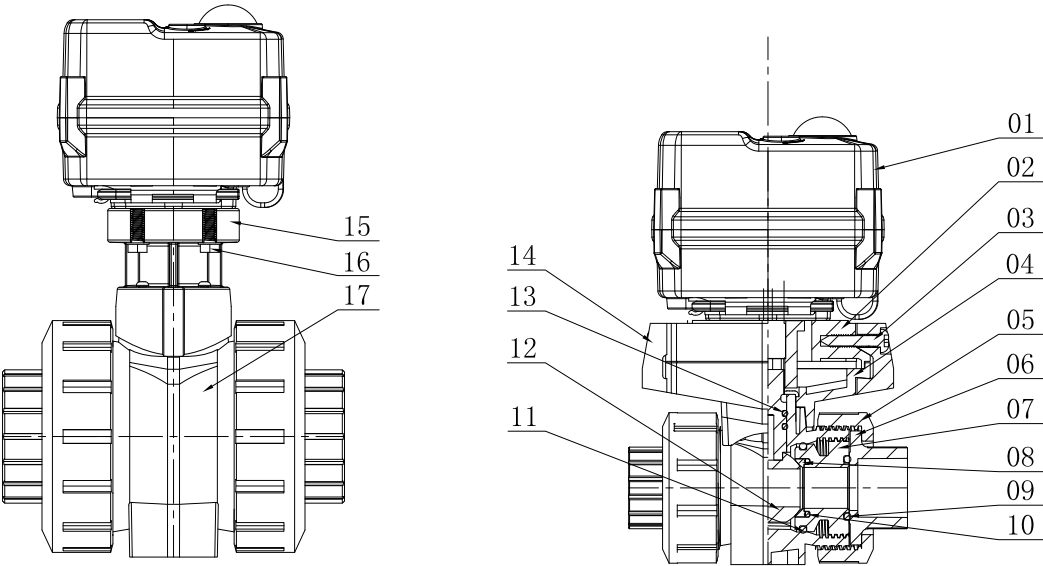

PVC-U/C
ELECTRIC FLANGED TRUE UNION BALL VALVE

电动法兰式双由令球阀，PVC-U/C（国标，美标，日标）

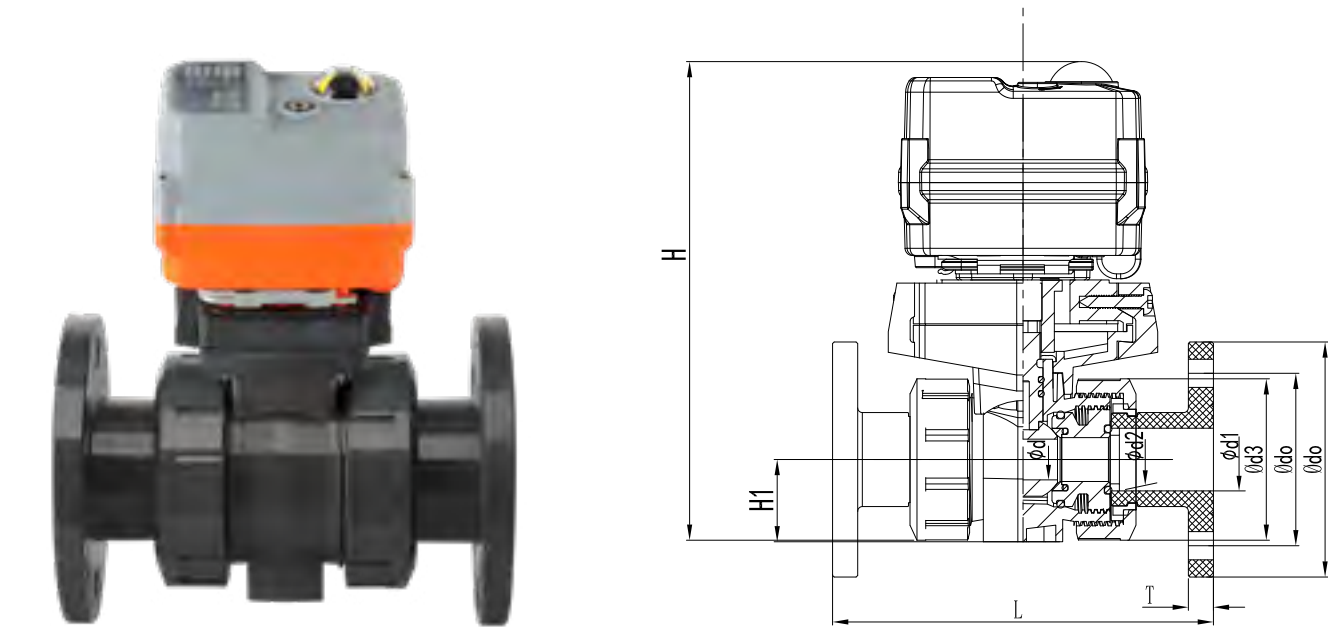

产品介绍

阀门描述
Valve Description

- 1. 材质：PVC -U/C
Material: PVC -U/C
- 2. 尺寸：DN15-100 1/ 2" -4" 16A-100A
Size: DN15-100 1/ 2" -4" 16A-100A
- 3. 标准：国标，美标，日标
Standard: DIN,ASTM,JIS,GB/T4219.2
- 4. 连接：法兰
Connection: Flanged connection
- 5. 颜色：本体：灰
Color: body: gray
- 6. 全塑气动执行器耐腐蚀
Whole plastic actuator shell for better corrosion resistance

产品特性
Product Features

- 1. 开关扭力小
Small switch torque
- 2. 部件可更换，简单经济
Replaceable parts, compact and economical
- 3. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
- 4. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
- 5. 阀门出厂 100% 压力测试
100% pressure test before delivery
- 6. 可以选配调节型，防爆及各种不同电压执行器
Optional adjustment, explosion-proof and various voltage actuators

产品参数（国标 GB/T 4219.2） SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）								
	D0	d0	d1	d2	d	H1	H	T	L
15(20)	95.00	65.00	20.30	19.95	15.50	26.30	223.25	13.00	143.00
20(25)	105.00	75.00	25.30	24.95	20.50	30.60	232.00	14.00	172.00
25(32)	115.00	85.00	32.30	31.90	26.00	39.10	242.50	15.00	187.00
32(40)	140.00	100.00	40.35	39.90	33.00	44.20	262.70	15.00	190.00
40(50)	150.00	110.00	50.35	49.90	39.00	52.20	274.45	17.00	212.00
50(63)	165.00	125.00	63.40	62.90	51.00	71.30	293.60	17.00	234.00
65(75)	185.00	145.00	75.40	74.90	64.00	82.80	366.80	18.00	290.00
80(90)	200.00	160.00	90.50	89.90	81.00	99.30	401.05	18.00	310.00
100(110)	220.00	180.00	110.60	109.90	99.00	115.20	436.80	18.00	372.00

产品参数（美标 SCH80） SPECIFICATIONS (ASTM SCH80)



尺寸 Size （"）	外形尺寸 Dimensions（mm）								
	D0	d0	d1	d2	d	H1	H	T	L
1/2"	89.00	60.30	20.30	19.95	15.50	26.30	223.15	13.00	143.00
3/4"	89.00	69.85	25.30	24.95	20.50	30.60	232.00	14.00	172.00
1"	108.00	79.38	32.30	31.90	26.00	39.10	242.50	15.00	187.00
1-1/4"	117.00	88.90	40.35	39.90	33.00	44.20	262.70	15.00	190.00
1-1/2"	127.00	98.43	50.35	49.90	39.00	52.20	274.45	17.00	212.00
2"	152.00	120.65	63.40	62.90	51.00	71.30	293.60	17.00	234.00
2-1/2"	178.00	139.70	75.40	74.90	64.00	82.80	366.80	18.00	290.00
3"	191.00	152.40	90.50	89.90	81.00	99.30	401.05	18.00	310.00
4"	229.00	190.50	110.60	109.90	99.00	115.20	436.80	18.00	372.00

产品参数（日标） SPECIFICATONS (JIS)

尺寸 Size A	外形尺寸 Dimensions（mm）								
	D0	d0	d1	d2	d	H1	H	T	L
16A	95.00	70.00	22.40	19.95	15.00	26.30	223.15	15.00	145.00
20A	100.00	75.00	26.45	24.95	20.00	30.60	232.00	15.00	175.00
25A	125.00	90.00	32.55	31.90	25.00	39.10	242.50	15.00	190.00
30A	135.00	100.00	38.60	39.90	30.00	44.20	262.70	16.00	195.00
40A	140.00	105.00	48.70	49.90	40.00	52.20	274.45	17.00	220.00
50A	155.00	120.00	60.80	62.90	50.00	71.30	293.60	21.00	234.00
65A	175.00	140.00	76.80	74.90	63.00	82.80	366.80	22.00	300.00
75A	185.00	150.00	89.60	89.90	80.00	99.30	401.05	22.00	320.00
100A	210.00	175.00	114.70	109.90	100.00	115.20	436.80	22.00	387.00


配件明细 PARTS LIST

序号 NO.	名称 Name	数量 Quantity	材料 Material
01	电动执行器 Electric Actuator	1	铝合金 / 塑料 Aluninum alloy/plastic
02	连接件上盖 Actuator adaptor top cover	1	PPS+GF40%
03	螺栓 Bolt	2	Stainless steel 304
04	连接件下盖 Actuator adaptor bottom cover	1	PPS+GF40%
05	螺帽 Nut	2	PVC-U/C
06	法兰头 Flange	2	PVC-U/C
07	调节单盖 Seal Carrier	1	PVC-U/C
08	止泻圈 Ball Seat	2	PTFE
09	O 型圈 1 O-ring1	2	EPDM/FPM
10	O 型圈 2 O-ring2	2	EPDM/FPM
11	O 型圈 3 O-ring3	1	EPDM/FPM
12	球心 Ball	1	PVC-U/C
13	O 型圈 4 O-ring4	2	EPDM/FPM
14	固定卡扣 Fixed buckle	2	PPS+GF40%
15	连接件 Actuator adaptor	1	PPS+GF40%
16	螺栓 Bolt	4	Stainless steel 304
17	阀体 Body	1	PVC-U/C
18	卡环 Snap ring	2	PVC-U/C

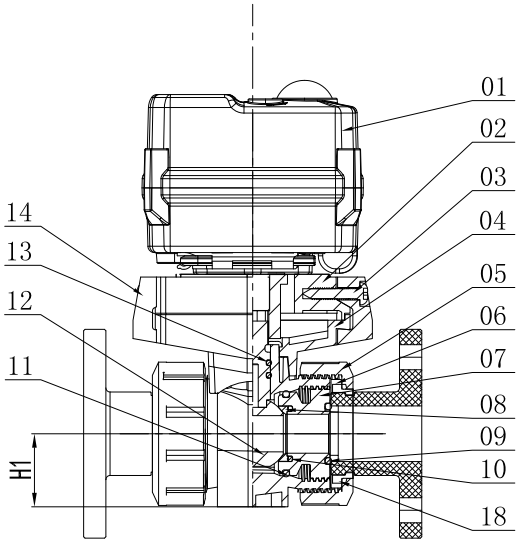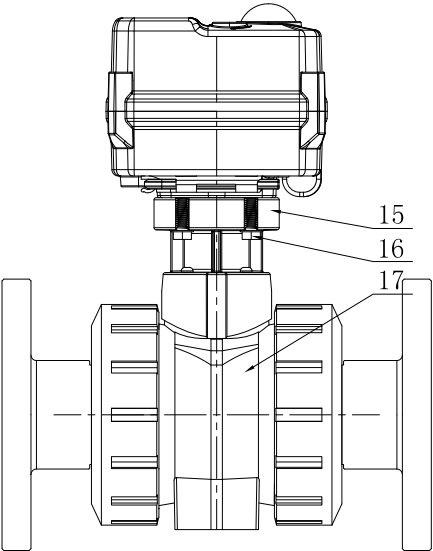

PVC-U/C
ELECTRIC THREADED TRUE UNION BALL VALVE

电动丝口式双由令球阀，PVC-U/C（国标，美标，日标）

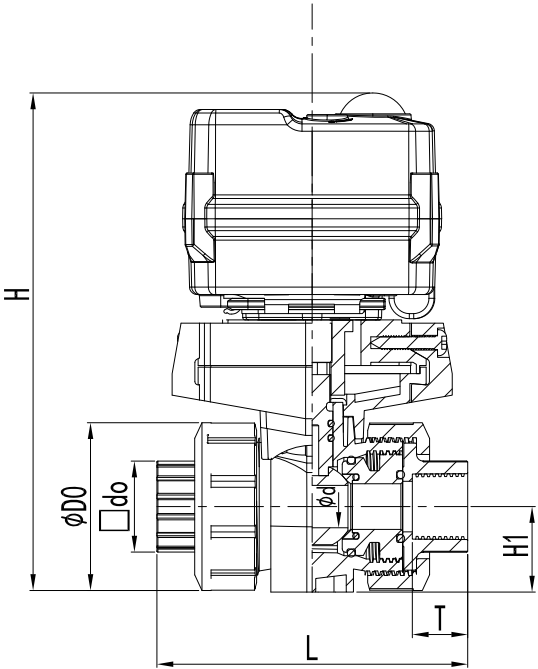

产品介绍

阀门描述
Valve Description

1. 材质：PVC -U/C
Material: PVC -U/C
2. 尺寸：DN15-100 1/ 2" -4" 16A-100A
Size: DN15-100 1/ 2" -4" 16A-100A
3. 标准：国标，美标，日标
Standard: DIN,ASTM,JIS,GB/T4219.2
4. 连接：丝口
Connection: Threaded connection
5. 颜色：本体：灰
Color: body: gray
6. 全塑气动执行器耐腐蚀
Whole plastic actuator shell for better corrosion resistance

产品特性
Product Features

1. 开关扭力小
Small switch torque
2. 部件可更换，简单经济
Replaceable parts, compact and economical
3. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
4. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
5. 阀门出厂 100% 压力测试
100% pressure test before delivery
6. 可以选配调节型，防爆及各种不同电压执行器
Optional adjustment, explosion-proof and various voltage actuators

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions (mm)								
	D0	d0	d1	d2	d	H1	H	T	L
15(20)	51.50	30.43	20.95	18.63	15.50	26.30	201.50	17.00	95.50
20(25)	59.00	36.30	26.44	24.12	20.50	30.60	209.00	19.50	109.10
25(32)	70.00	44.61	33.25	30.29	26.00	39.10	220.00	23.00	122.60
32(40)	85.40	53.87	41.91	38.95	33.00	44.20	235.40	27.00	147.30
40(50)	98.90	61.12	47.80	44.85	39.00	52.20	248.90	32.00	158.80
50(63)	122.20	73.83	59.61	56.66	51.00	71.30	272.20	38.50	182.80
65(75)	158.60	87.71	75.18	74.23	64.00	82.80	353.60	44.50	234.00
80(90)	192.10	106.81	87.88	84.93	81.00	99.30	397.10	52.00	255.00
100(110)	223.60	133.46	113.03	110.07	99.00	115.20	438.60	62.00	297.00

产品参数（美标 SCH80）

SPECIFICATIONS (ASTM SCH80)

尺寸 Size (*)	外形尺寸 Dimensions (mm)								
	D0	d0	d1	d2	d	H1	H	T	L
1/2"	51.50	30.43	20.95	18.63	15.50	26.30	201.50	17.00	95.50
3/4"	59.00	36.30	26.44	24.12	20.50	30.60	209.00	19.50	109.10
1"	70.00	44.61	33.25	30.29	26.00	39.10	220.00	23.00	122.60
1-1/4"	85.40	53.87	41.91	38.95	33.00	44.20	235.40	27.00	147.30
1-1/2"	98.90	61.12	47.80	44.85	39.00	52.20	248.90	32.00	158.80
2"	122.20	73.83	59.61	56.66	51.00	71.30	272.20	38.50	182.80
2-1/2"	158.60	87.71	75.18	74.23	64.00	82.80	353.60	44.50	234.00
3"	192.10	106.81	87.88	84.93	81.00	99.30	397.10	52.00	255.00
4"	223.60	133.46	113.03	110.07	99.00	115.20	438.60	62.00	297.00

产品参数（日标）


SPECIFICATONS (JIS)

尺寸 Size A	外形尺寸 Dimensions (mm)								
	D0	d0	d1	d2	d	H1	H	T	L
16	51.50	30.43	20.95	18.63	15.50	26.30	201.50	17.00	95.50
20	59.00	36.30	26.44	24.12	20.50	30.60	209.00	19.50	109.10
25	70.00	44.61	33.25	30.29	26.00	39.10	220.00	23.00	122.60
30	85.40	53.87	41.91	38.95	33.00	44.20	235.40	27.00	147.30
40	98.90	61.12	47.80	44.85	39.00	52.20	248.90	32.00	158.80
50	122.20	73.83	59.61	56.66	51.00	71.30	272.20	38.50	182.80
65	158.60	87.71	75.18	74.23	64.00	82.80	353.60	44.50	234.00
75	192.10	106.81	87.88	84.93	81.00	99.30	397.10	52.00	255.00
100	223.60	133.46	113.03	110.07	99.00	115.20	438.60	62.00	297.00

配件明细


PARTS LIST

序号 NO.	名称 Name	数量 Quantity	材料 Material
01	电动执行器 Eletric Actuator	1	铝合金 / 塑料 Aluninum alloy/plastic
02	连接件上盖 Actuator adaptor top coverr	1	PPS+GF40%
03	螺栓 Bolt	2	Stainless steel 304
04	连接件下盖 Actuator adaptor bottom cover	1	PPS+GF40%
05	螺帽 Nut	2	PVC-U/C
06	承口 Faucet	2	PVC-U/C
07	调节单盖 Seal Carrier	1	PVC-U/C
08	止泻圈 Ball Seat	2	PTFE
09	O 型圈 1 O-ring1	2	EPDM/FPM
10	O 型圈 2 O-ring2	2	EPDM/FPM
11	O 型圈 3 O-ring3	1	EPDM/FPM
12	球心 Ball	1	PVC-U/C
13	O 型圈 4 O-ring4	2	EPDM/FPM
14	固定卡扣 Fixed buckle	2	PPS+GF40%
15	连接件 Actuator adaptor	1	PPS+GF40%
16	螺栓 Bolt	4	Stainless steel 304
17	阀体 Body	1	PVC-U/C

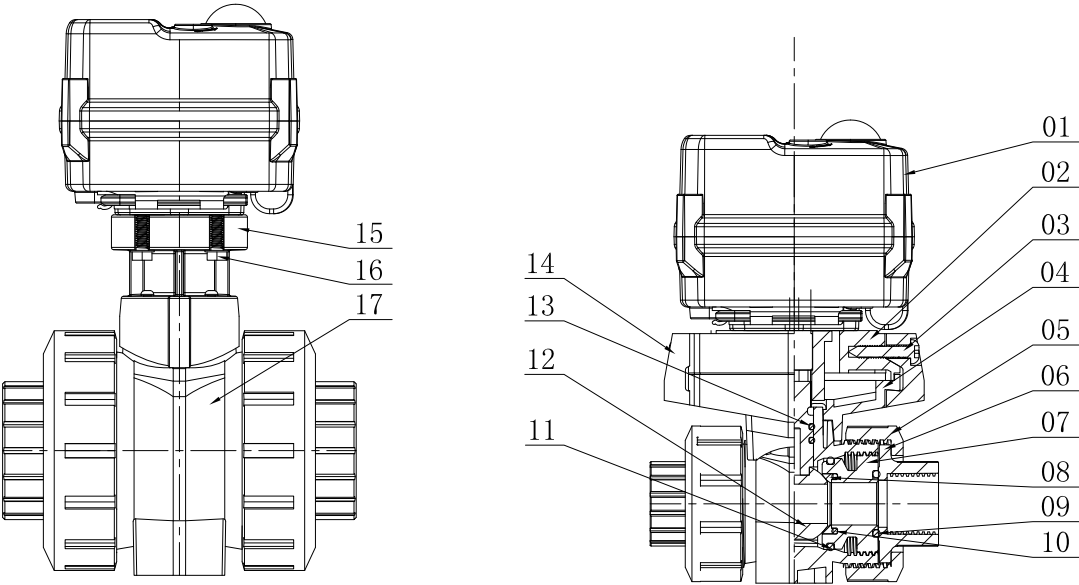

PVC-U/C
ECCENTRIC BUTTERFLY VALVE (MANUAL TYPE)

手动式蝶阀，PVC-U/C（国标，美标，日标）

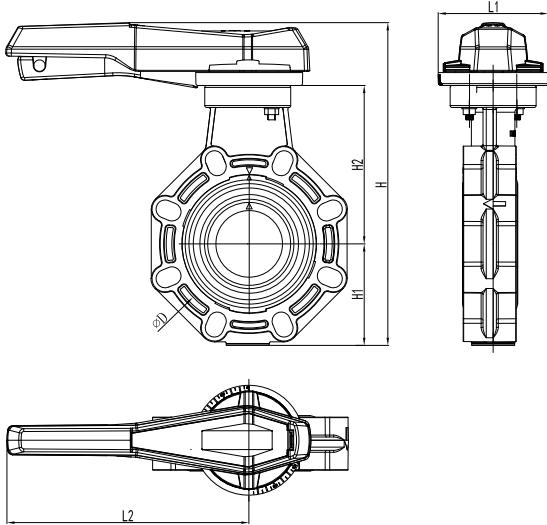

产品介绍

阀门描述
Valve Description

1. 材质：PVC -U/C
Material: PVC -U/C
2. 尺寸：DN50-200 2"-8" 50A-200A
Size: DN50-200 2"-8" 50A-200A
3. 标准：国标，美标，日标
Standard: DIN,ASTM,JIS,GB/T4219.2
4. 连接：法兰
Connection: Flanged connection
5. 颜色：黑色，把手红色，阀板 / 阀座深灰
Colour:Body-black Handle-red,Valve Disc/Seat-dark gray
6. 配套工业用一体法兰使用，如配套工业用活套法兰使用，请加工业用法兰垫片
Installed with one-piece flanges, if use vanstone flanges, please add flange gaskets

产品特性
Product Features

1. 双偏心结构设计，使用寿命为普通蝶阀的 5 倍
Double eccentric structure design, the service life is 5 times that of ordinary butterfly valve
2. 开关扭力小
Small switch torque
3. 部件可更换，简单经济
Replaceable parts, compact and economical
4. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
5. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
6. 阀门出厂 100% 压力测试
100% pressure test before delivery
7. 本体和密封经过特殊处理，性能更好
Body and sealing parts are specially treated for better performance

产品参数（国标 GB/T 4219.2） SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions (mm)						
	D	H	H1	H2	S	L1	L2
50(63)	104.00	266.00	77.00	134.00	44.50	102.00	212.50
65(75)	114.30	275.00	83.00	140.00	46.00	102.00	212.50
80(90)	130.00	288.00	89.00	146.00	48.60	102.00	212.50
100(110)	160.40	332.00	104.00	167.00	55.50	115.00	253.30
125(140)	186.00	361.00	117.00	181.00	63.00	115.00	253.30
150(160)	215.00	379.00	130.00	189.00	72.00	115.00	253.30
200(225)	269.00	449.00	158.00	210.00	73.00	150.00	410.00

产品参数（美标 SCH80） SPECIFICATIONS (ASTM SCH80)


尺寸 Size (*")	外形尺寸 Dimensions (mm)						
	D	H	H1	H2	S	L1	L2
2"	104.00	266.00	77.00	134.00	44.50	102.00	212.50
2-1/2"	114.30	275.00	83.00	140.00	46.00	102.00	212.50
3"	130.00	288.00	89.00	146.00	48.60	102.00	212.50
4"	160.40	332.00	104.00	167.00	55.50	115.00	253.30
5"	186.00	361.00	117.00	181.00	63.00	115.00	253.30
6"	215.00	379.00	130.00	189.00	72.00	115.00	253.30
8"	269.00	449.00	158.00	210.00	73.00	150.00	410.00

产品参数（日标） SPECIFICATONS (JIS)

尺寸 Size A	外形尺寸 Dimensions (mm)						
	D	H	H1	H2	S	L1	L2
50A	104.00	266.00	77.00	134.00	44.50	102.00	212.50
65A	114.30	275.00	83.00	140.00	46.00	102.00	212.50
75A	130.00	288.00	89.00	146.00	48.60	102.00	212.50
100A	160.40	332.00	104.00	167.00	55.50	115.00	253.30
125A	186.00	361.00	117.00	181.00	63.00	115.00	253.30
150A	215.00	379.00	130.00	189.00	72.00	115.00	253.30
200A	269.00	449.00	158.00	210.00	73.00	150.00	410.00


配件明细 PARTS LIST

序号 NO.	名称 Name	数量 Quantity	材料 Material
01	手柄盖 Handle Cap	1	PP+GF30
02	手柄 Handle	1	PP+GF30
03	传动座 Drive Seat	1	PPS+GF40
04	齿轮座 Gear Seat	1	PP+GF30
05	挡圈 Collar	1	Stainless steel 304
06	定位套 Located Sleeve	1	PP+GF30
07	阀体 Body	1	PP+GF30
08	导向套 Guide Sleeve	2	PVC-U/C
09	O 型圈 O-ring	8	EPDM/FPM
10	阀门套 Valve Sleeve	1	PVC-U/C
11	阀板 Disc	1	PVC-U/C
12	传动杆 Shaft	1	Stainless steel 316L
13	挡圈 Collar	1	Stainless steel 304
14	垫圈 Washer	1	Stainless steel 304
15	垫圈盖 Washer Cover	1	PP+GF30
16	制动把手 Brake Handle	1	PP+GF30
17	弹簧 Spring	1	Stainless steel 304
18	螺丝 Screw	1	Stainless steel 304
19	螺帽 Nut	1	Stainless steel 304
20	垫片 Gasket	1	Stainless steel 304
21	油封 Oil Seal	1	EPDM/FPM
22	胶圈 Seal	2	EPDM/FPM

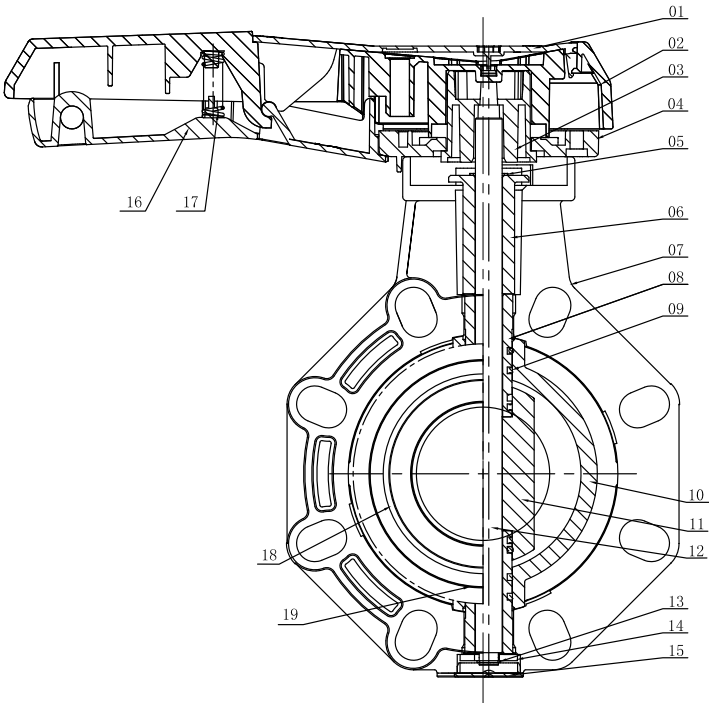

PVC-U/C
 ECCENTRIC BUTTERFLY VALVE(GEAR TYPE)

齿轮式蝶阀（国标，美标，日标）

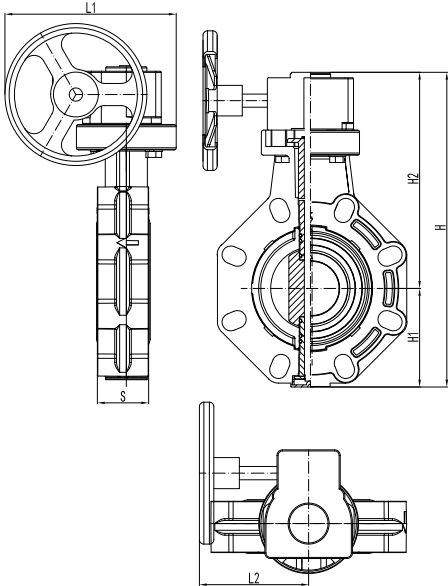

产品介绍

阀门描述
 Valve Description

1. 材质：PVC -U/C
Material: PVC -U/C
2. 尺寸：DN50-400 2"-16" 50A-400A
Size: DN50-400 2"-16" 50A-400A
3. 标准：国标，美标，日标
Standard: DIN,ASTM,JIS,GB/T4219.2
4. 连接：法兰
Connection: Flanged connection
5. 颜色：黑色，（阀板 / 阀座深灰）
Colour: Black, Body-black Valve Disc/Seat-dark gray

产品特性
 Product Features

1. 开关扭力小
Small switch torque
2. 部件可更换，简单经济
Replaceable parts, compact and economical
3. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
4. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
5. 阀门出厂 100% 压力测试
100% pressure test before delivery
6. 本体和密封经过特殊处理，性能更好
Body and sealing parts are specially treated for better performance

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）						
	D	H	H1	H2	S	L1	L2
50(63)	104.00	307.48	77.00	230.48	44.50	153.00	108.00
65(75)	114.30	320.13	83.00	237.13	46.00	153.00	108.00
80(90)	130.00	332.13	89.00	243.13	48.60	153.00	108.00
100(110)	160.40	367.77	104.00	263.77	55.50	153.00	108.00
125(140)	186.00	411.47	117.00	294.47	63.00	166.00	119.00
150(160)	215.00	472.30	130.00	342.30	72.00	166.00	119.00
200(225)	269.00	521.54	158.00	363.54	73.00	268.00	223.00
250(280)	324.00	620.51	205.00	415.51	113.00	285.50	223.00
300(315)	336.60	722.24	228.00	494.24	114.40	342.50	323.00
350(355)	522.00	784.00	257.00	527.00	129.00	342.50	223.00
400(400)	586.00	850.00	288.00	562.00	159.00	342.50	323.00

产品参数（美标 SCH80）

SPECIFICATIONS (ASTM SCH80)

尺寸 Size (*)	外形尺寸 Dimensions（mm）						
	D	H	H1	H2	S	L1	L2
2"	104.00	307.48	77.00	230.48	44.50	153.00	108.00
2-1/2"	114.30	320.13	83.00	237.13	46.00	153.00	108.00
3"	130.00	332.13	89.00	243.13	48.60	153.00	108.00
4"	160.40	367.77	104.00	263.77	55.50	153.00	108.00
5"	186.00	411.47	117.00	294.47	63.00	166.00	119.00
6"	215.00	472.30	130.00	342.30	72.00	166.00	119.00
8"	269.00	521.54	158.00	363.54	73.00	268.00	223.00
10"	324.00	620.51	205.00	415.51	113.00	285.50	223.00
12"	336.60	722.24	228.00	494.24	114.40	342.50	323.00
14"	522.00	784.00	257.00	527.00	129.00	342.50	223.00
16"	586.00	850.00	288.00	562.00	159.00	342.50	323.00

产品参数（日标）


SPECIFICATONS (JIS)

尺寸 Size A	外形尺寸 Dimensions（mm）						
	D	H	H1	H2	S	L1	L2
50A	104.00	307.48	77.00	230.48	44.50	153.00	108.00
65A	114.30	320.13	83.00	237.13	46.00	153.00	108.00
75A	130.00	332.13	89.00	243.13	48.60	153.00	108.00
100A	160.40	367.77	104.00	263.77	55.50	153.00	108.00
125A	186.00	411.47	117.00	294.47	63.00	166.00	119.00
150A	215.00	472.30	130.00	342.30	72.00	166.00	119.00
200A	269.00	521.54	158.00	363.54	73.00	268.00	223.00
267A	324.00	620.51	205.00	415.51	113.00	285.50	223.00
318A	336.60	722.24	228.00	494.24	114.40	342.50	323.00
350A	522.00	784.00	257.00	527.00	129.00	342.50	223.00
400A	586.00	850.00	288.00	562.00	159.00	342.50	323.00

配件明细


PARTS LIST

序号 NO.	名称 Name	数量 Quantity	材料 Material
01	齿轮传动装置 Gear Drive Set	1	铝合金 Aluminum alloy
02	挡圈 Collar	1	Stainless steel 304
03	定位套 Located Sleeve	4	PP+GF30
04	垫片 Gasket	1	PP+GF30
05	螺栓 Bolt	4	Stainless steel 304
06	阀体 Body	1	PP+GF30
07	导向套 Guide Sleeve	2	PVC-U/C
08	O 型圈 O-ring	8	EPDM/FPM
09	阀门套 Valve Sleeve	1	PVC-U/C
10	阀板 Disc	1	PVC-U/C
11	油封 Oil Seal	1	EPDM/FPM
12	传动杆 Shaft	1	Stainless steel 316L
13	胶圈 Rubber Seal	1	EPDM/FPM
14	挡圈 Collar	1	Stainless steel 304
15	垫圈 Washer	1	Stainless steel 304
16	垫圈盖 Washer Cover	1	PP+GF30

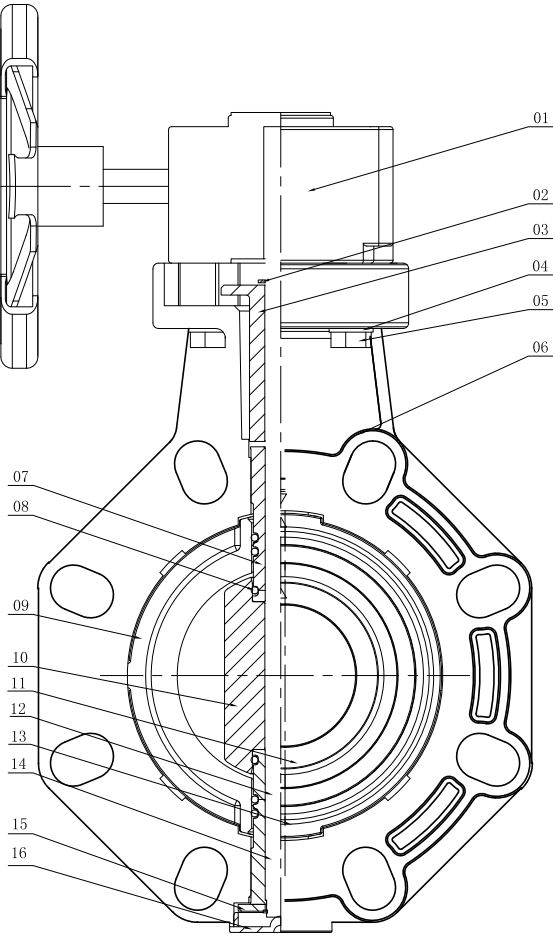

PVC-U/C
PNEUMATIC ECCENTRIC BUTTERFLY VALVE

气动式蝶阀，PVC-U/C（国标，美标，日标）

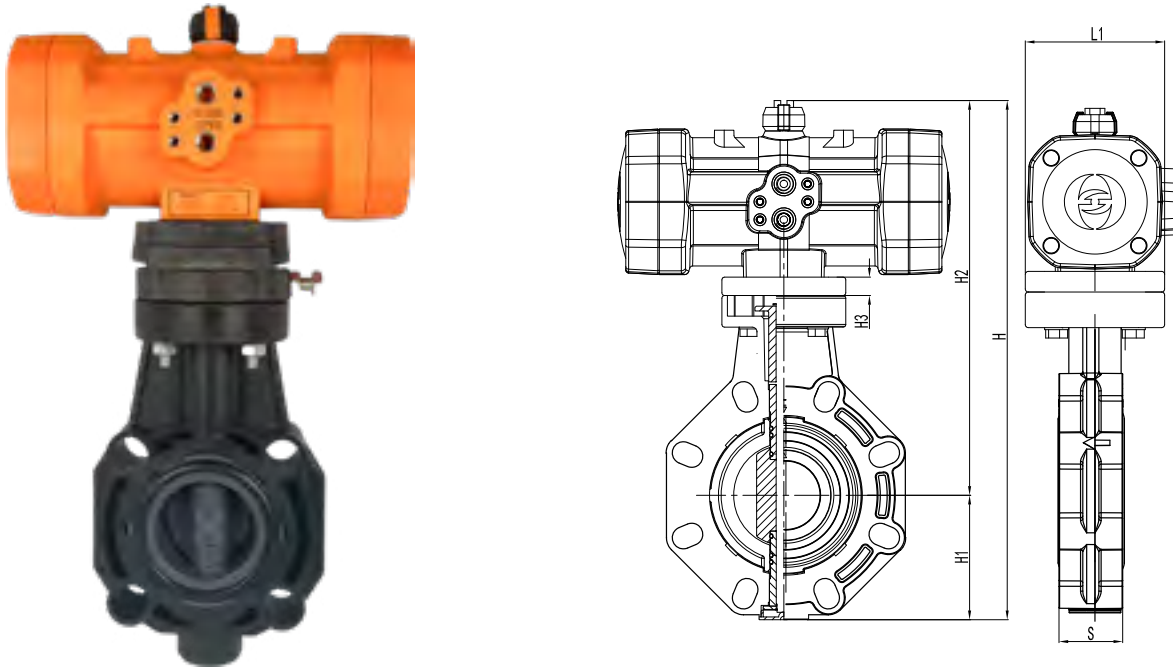

产品介绍

阀门描述
Valve Description

- 1. 材质：PVC -U/C
Material: PVC -U/C
- 2. 尺寸：DN50-400 2"-16" 50A-400A
Size: DN50-400 2"-16" 50A-400A
- 3. 标准：国标，美标，日标
Standard: DIN,ASTM,JIS,GB/T4219.2
- 4. 连接：法兰
Connection: Flanged connection
- 5. 颜色：黑色，（阀板 / 阀座深灰）
Colour: Body-black Valve Disc/Seat-dark gray

产品特性
Product Features

- 1. 开关扭力小
Small switch torque
- 2. 部件可更换，简单经济
Replaceable parts, compact and economical
- 3. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
- 4. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
- 5. 执行器进行 300 万次开启关闭试验
Actuator passed 3000,000 opening and closing tests
- 6. 可以选配单作用执行器及各种电磁阀，回讯位置开关
Single-acting actuator, various solenoids and limit switch are optional

产品参数（国标 GB/T 4219.2） SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）						
	D	H	H1	H2	H3	S	L1
50(63)	104.00	327.48	77.00	250.48	15.00	44.50	90.00
65(75)	114.30	352.13	83.00	269.13	15.00	46.00	90.00
80(90)	130.00	384.13	89.00	295.13	15.00	48.60	90.00
100(110)	160.40	432.77	104.00	328.77	-	55.50	90.00
125(140)	186.00	481.47	117.00	364.47	-	63.00	90.00
150(160)	215.00	528.30	130.00	388.30	-	72.00	90.00
200(225)	269.00	593.54	158.00	435.54	-	73.00	90.00
250(280)	324.00	750.51	205.00	545.51	-	113.00	125.00
300(315)	336.60	888.24	228.00	660.24	-	114.40	125.00
350(355)	522.00	784.00	257.00	527.00	-	129.00	125.00
400(400)	586.00	850.00	288.00	562.00	-	159.00	125.00

产品参数（美标 SCH80） SPECIFICATIONS (ASTM SCH80)


尺寸 Size (*)	外形尺寸 Dimensions（mm）						
	D	H	H1	H2	H3	S	L1
2"	104.00	327.48	77.00	250.48	15.00	44.50	90.00
2-1/2"	114.30	352.13	83.00	269.13	15.00	46.00	90.00
3"	130.00	384.13	89.00	295.13	15.00	48.60	90.00
4"	160.40	432.77	104.00	328.77	-	55.50	90.00
5"	186.00	481.47	117.00	364.47	-	63.00	90.00
6"	215.00	528.30	130.00	388.30	-	72.00	90.00
8"	269.00	593.54	158.00	435.54	-	73.00	90.00
10"	324.00	750.51	205.00	545.51	-	113.00	125.00
12"	336.60	888.24	228.00	660.24	-	114.40	125.00
14"	522.00	784.00	257.00	527.00	-	129.00	125.00
16"	586.00	850.00	288.00	562.00	-	159.00	125.00

产品参数（日标） SPECIFICATONS (JIS)

尺寸 Size A	外形尺寸 Dimensions（mm）						
	D	H	H1	H2	H3	S	L1
50A	104.00	327.48	77.00	250.48	15.00	44.50	90.00
65A	114.30	352.13	83.00	269.13	15.00	46.00	90.00
75A	130.00	384.13	89.00	295.13	15.00	48.60	90.00
100A	160.40	432.77	104.00	328.77	-	55.50	90.00
125A	186.00	481.47	117.00	364.47	-	63.00	90.00
150A	215.00	528.30	130.00	388.30	-	72.00	90.00
200A	269.00	593.54	158.00	435.54	-	73.00	90.00
267A	324.00	750.51	205.00	545.51	-	113.00	125.00
318A	336.60	888.24	228.00	660.24	-	114.40	125.00
350A	522.00	784.00	257.00	527.00	-	129.00	125.00
400A	586.00	850.00	288.00	562.00	-	159.00	125.00


配件明细 PARTS LIST

序号 NO.	名称 Name	数量 Quantity	材料 Material
01	气动执行器 Pneumatic Actuator	1	铝合金 Aluminum Alloy
02	挡圈 Collar	1	Stainless steel 304
03	定位套 Located Sleeve	4	PP+GF30
04	垫片 Gasket	1	PP+GF30
05	螺栓 Bolt	4	Stainless steel 304
06	阀体 Body	1	PP+GF30
07	导向套 Guide Sleeve	2	PVC-U/C
08	O 型圈 O-ring	8	EPDM/FPM
09	阀门套 Valve Sleeve	1	PVC-U/C
10	阀板 Disc	1	PVC-U/C
11	油封 Oil Seal	1	EPDM/FPM
12	传动杆 Shaft	1	Stainless steel 316L
13	胶圈 Rubber Seal	1	EPDM/FPM
14	挡圈 Collar	1	Stainless steel 304
15	垫圈 Wahser	1	Stainless steel 304
16	垫圈盖 Washer Cover	1	PP+GF30

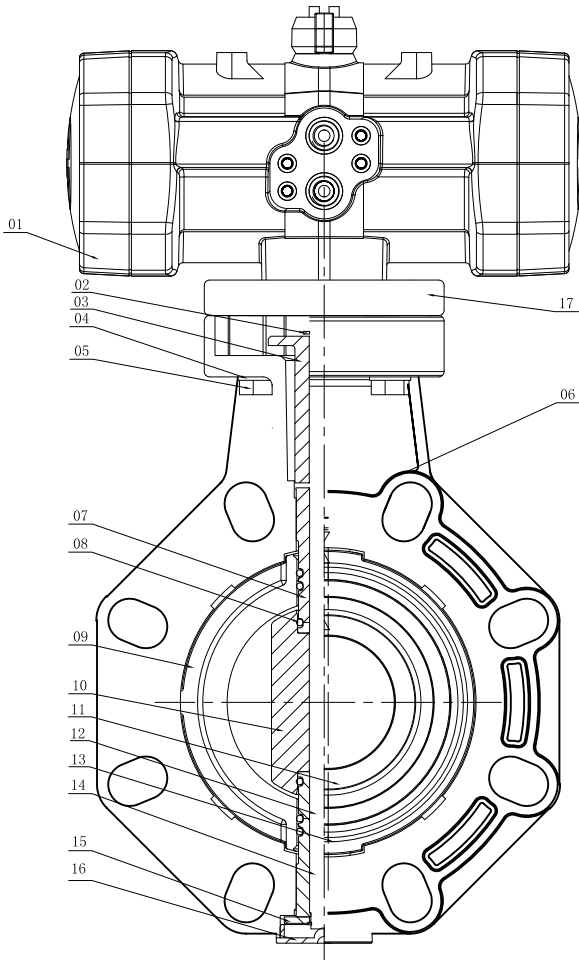

PVC-U/C
ELECTRIC ECCENTRIC BUTTERFLY VALVE

电动式蝶阀，PVC-U/C（国标，美标，日标）

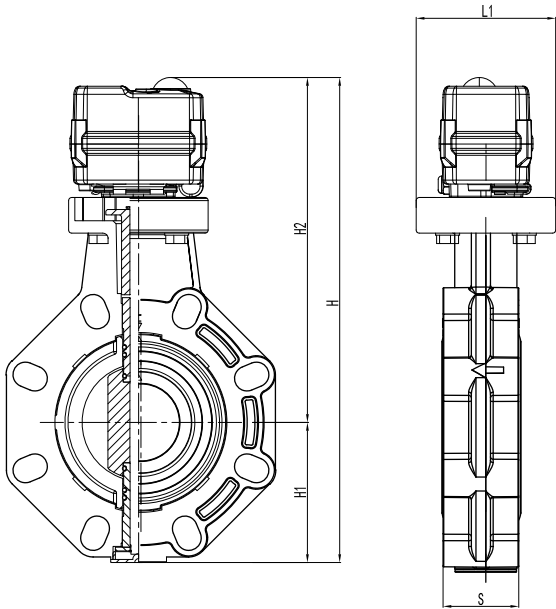

产品介绍

阀门描述
Valve Description

1. 材质：PVC -U/C
Material: PVC -U/C
2. 尺寸：DN50-400 2"-16" 50A-400A
Size: DN50-400 2"-16" 50A-400A
3. 标准：国标，美标，日标
Standard: DIN,ASTM,JIS,GB/T4219.2
4. 连接：法兰
Connection: Flanged connection
5. 颜色：黑色（执行器黄色，阀板 / 阀座灰色）
Colour: Body-black Actuator-yellow, Valve Disc/Seat-dark gray

产品特性
Product Features

1. 开关扭力小
Small switch torque
2. 部件可更换，简单经济
Replaceable parts, compact and economical
3. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
4. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
5. 阀门出厂 100% 压力测试
100% pressure test before delivery
6. 可以选配调节型，防爆及各种不同电压执行器
Single-acting actuator, various solenoids and limit switch are optional

产品参数（国标 GB/T 4219.2）SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）					
	D	H	H1	H2	S	L1
50(63)	104.00	339.48	77.00	262.48	44.50	120.00
65(75)	114.30	352.13	83.00	269.13	46.00	120.00
80(90)	130.00	364.13	89.00	275.13	48.60	120.00
100(110)	160.40	429.77	104.00	325.77	55.50	130.00
125(140)	186.00	446.47	117.00	339.47	63.00	130.00
150(160)	215.00	477.30	130.00	347.30	72.00	130.00
200(225)	269.00	526.54	158.00	368.54	73.00	130.00
250(280)	324.00	660.51	205.00	455.51	113.00	170.00
300(315)	336.60	705.24	228.00	477.24	114.40	170.00
350(355)	522.00	784.00	257.00	527.00	129.00	170.00
400(400)	586.00	850.00	288.00	562.00	159.00	170.00

产品参数（美标 SCH80）SPECIFICATIONS (ASTM SCH80)


尺寸 Size (*)	外形尺寸 Dimensions（mm）					
	D	H	H1	H2	S	L1
2"	104.00	339.48	77.00	262.48	44.50	120.00
2-1/2"	114.30	352.13	83.00	269.13	46.00	120.00
3"	130.00	364.13	89.00	275.13	48.60	120.00
4"	160.40	429.77	104.00	325.77	55.50	130.00
5"	186.00	446.47	117.00	339.47	63.00	130.00
6"	215.00	477.30	130.00	347.30	72.00	130.00
8"	269.00	526.54	158.00	368.54	73.00	130.00
10"	324.00	660.51	205.00	455.51	113.00	170.00
12"	336.60	705.24	228.00	477.24	114.40	170.00
14"	522.00	784.00	257.00	527.00	129.00	170.00
16"	586.00	850.00	288.00	562.00	159.00	170.00

产品参数（日标）SPECIFICATONS (JIS)

尺寸 Size A	外形尺寸 Dimensions（mm）					
	D	H	H1	H2	S	L1
50A	104.00	339.48	77.00	262.48	44.50	120.00
65A	114.30	352.13	83.00	269.13	46.00	120.00
75A	130.00	364.13	89.00	275.13	48.60	120.00
100A	160.40	429.77	104.00	325.77	55.50	130.00
125A	186.00	446.47	117.00	339.47	63.00	130.00
150A	215.00	477.30	130.00	347.30	72.00	130.00
200A	269.00	526.54	158.00	368.54	73.00	130.00
267A	324.00	660.51	205.00	455.51	113.00	170.00
318A	336.60	705.24	228.00	477.24	114.40	170.00
350A	522.00	784.00	257.00	527.00	129.00	170.00
400A	586.00	850.00	288.00	562.00	159.00	170.00


配件明细 PARTS LIST

序号 NO.	名称 Name	数量 Quantity	材料 Material
01	电动执行器 Electric Actuator	1	ABS/ 铝合金 Aluminum Alloy
02	挡圈 Collar	1	Stainless steel 304
03	定位套 Located Sleeve	4	PP+GF30
04	垫片 Gasket	1	PP+GF30
05	螺栓 Bolt	4	Stainless steel 304
06	阀体 Body	1	PP+GF30
07	导向套 Guide Sleeve	2	PVC-U/C
08	O 型圈 O-ring	8	EPDM/FPM
09	阀门套 Valve Sleeve	1	PVC-U/C
10	阀板 Disc	1	PVC-U/C
11	油封 Oil Seal	1	EPDM/FPM
12	传动杆 Shaft	1	Stainless steel 316L
13	胶圈 Rubber Ring	2	EPDM/FPM
14	挡圈 Collar	1	Stainless steel 304
15	垫圈 Washer	1	Stainless steel 304
16	垫圈盖 Washer	1	PP+GF30

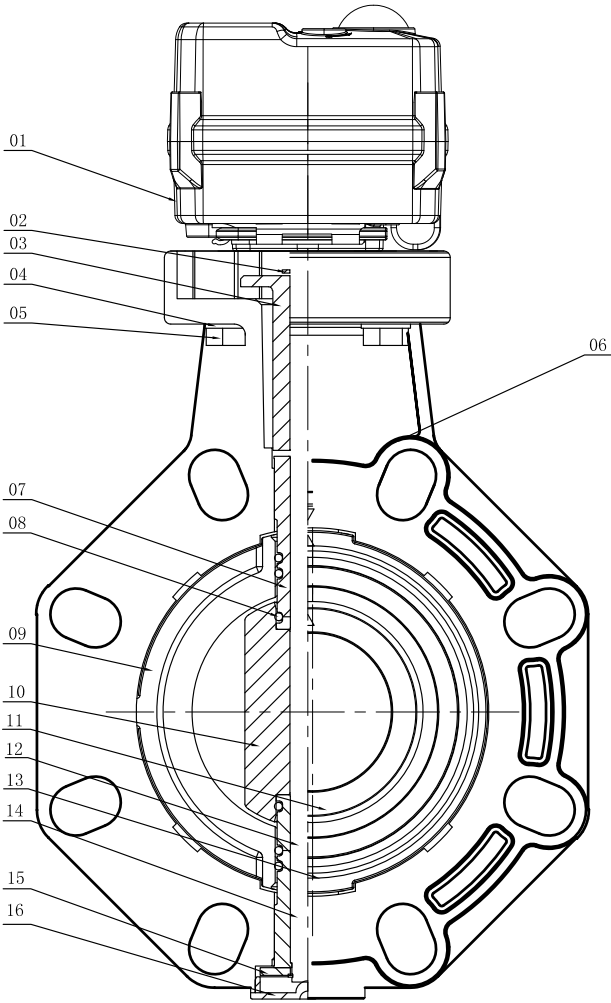

PVC-U/C FLANGED DIAPHRAGM VALVE

法兰式隔膜阀，PVC-U/C（国标，美标，日标）

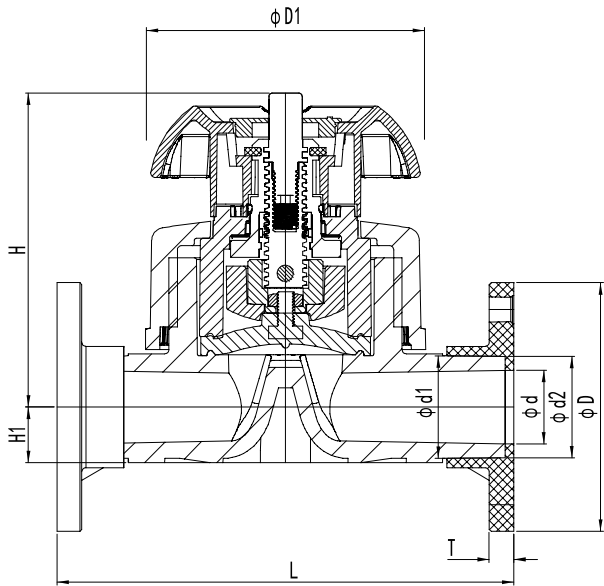

产品介绍

阀门描述 Valve Description

1. 材质：PVC -U/C
Material: PVC -U/C
2. 尺寸：DN15-150，1/2"~6"，16A~150A
Size: DN15-150，1/2"~6"，16A~150A
3. 标准：国标，美标，日标
Standard: DIN,ASTM,JIS,GB/T4219.2
4. 连接：法兰式
Connection: Flanged connection
5. 颜色：本体灰色，阀盖黄色，手柄黑色
Color:Body-dark gray Valve Cover-yellow, Handwheel-black

产品特性 Product Features

1. 开关扭力小
Small switch torque
2. 部件可更换，简单经济
Replaceable parts, compact and economical
3. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
4. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
5. 阀门出厂 100% 压力测试
100% pressure test before delivery
6. 本体和密封经过特殊处理，性能更好
Body and sealing parts are specially treated for better performance

产品参数（国标 GB/T 4219.2） SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）									
	D	D1	d	H1	H	T	L	法兰中心距	法兰孔径	法兰孔径
15(20)	95.00	80.00	16.00	14.00	90.00	13.00	121.00	65.00	14.00	4
20(25)	105.00	80.00	21.00	18.00	102.00	14.00	142.00	75.00	14.00	4
25(32)	115.00	94.00	28.00	21.00	119.00	15.00	151.00	85.00	14.00	4
32(40)	140.00	117.00	36.00	26.00	126.00	15.00	169.00	100.00	16.00	4
40(50)	150.00	117.00	45.00	33.00	139.00	17.00	193.00	110.00	16.00	4
50(63)	165.00	152.00	57.00	39.00	172.00	17.00	227.00	125.00	19.00	4
65(75)	185.00	151.60	85.00	91.00	173.00	17.00	290.00	145.00	19.00	4
80(90)	197.00	263.00	85.00	109.00	226.00	18.00	310.00	160.00	19.00	8
100(110)	220.00	263.00	106.00	134.00	234.00	20.00	350.00	180.00	19.00	8
125(140)	250.00	263.00	106.00	134.00	234.00	22.00	350.00	210.00	22.00	8
150(160)	286.00	392.60	150.00	212.00	333.00	24.00	480.00	240.00	22.00	8

产品参数（美标 SCH80） SPECIFICATIONS (ASTM SCH80)



尺寸 Size（*）	外形尺寸 Dimensions（mm）									
	D	D1	d	H1	H	T	L	法兰中心距	法兰孔径	法兰孔径
1/2"	89.00	80.00	16.00	14.00	90.00	13.00	121.00	60.33	16.00	4
3/4"	98.00	80.00	21.00	18.00	102.00	14.00	142.00	69.85	16.00	4
1"	108.00	94.00	28.00	21.00	119.00	15.00	151.00	79.38	16.00	4
1-1/4"	117.00	117.00	36.00	26.00	126.00	15.00	169.00	88.90	18.00	4
1-1/2"	127.00	117.00	45.00	33.00	139.00	17.00	193.00	98.43	18.00	4
2"	152.00	152.00	57.00	39.00	172.00	17.00	227.00	120.65	18.00	4
2-1/2"	178.00	152.00	85.00	91.00	173.00	17.00	250.00	139.70	18.00	4
3"	189.00	264.00	85.00	109.00	226.00	18.00	264.00	152.40	18.00	4
4"	229.00	264.00	106.00	134.00	234.00	20.00	329.00	190.50	18.00	8
5"	250.00	264.00	106.00	134.00	234.00	22.00	350.00	210.00	22.00	8
6"	286.00	393.00	150.00	212.00	333.00	24.00	480.00	241.30	22.00	8

产品参数（日标） SPECIFICATONS (JIS)


尺寸 Size A	外形尺寸 Dimensions（mm）									
	D	D1	d	H1	H	T	L	法兰中心距	法兰孔径	法兰孔径
16A	95.00	80.00	15.00	14.00	90.00	15.00	125.00	70.00	15.00	4
20A	100.00	80.00	20.00	18.00	102.00	15.00	145.00	75.00	15.00	4
25A	125.00	94.00	25.00	21.00	119.00	15.00	151.00	90.00	19.00	4
30A	135.00	117.00	30.00	26.00	126.00	16.00	170.00	100.00	19.00	4
40A	140.00	117.00	40.00	33.00	139.00	17.00	193.00	105.00	19.00	4
50A	155.00	152.00	50.00	39.00	172.00	21.00	235.00	120.00	19.00	4
65A	175.00	152.00	63.00	91.00	173.00	23.00	262.00	140.00	19.00	4
75A	185.00	264.00	80.00	109.00	226.00	23.50	275.00	150.00	19.00	8
100A	210.00	264.00	100.00	134.00	234.00	23.50	336.00	175.00	19.00	8
125A	250.00	264.00	125.00	134.00	234.00	25.50	357.00	210.00	23.00	8
150A	280.00	393.00	140.00	212.00	333.00	27.50	488.00	240.00	23.00	8

配件明细 PARTS LIST

序号 NO.	名称 Name	数量 Quantity	材料 Material
01	阀体（国标）Body(GB/T 4219.2)	1	PVC-U/C
02	隔膜片 Diaphragm	1	EPDM/FPM
03	隔膜片封水套 Diaphragm water seal sleeve	1	PP+GF30
04	六角螺栓 Hex bolt	1	Stainless steel 304
05	六角螺母 Hex nut	1	Stainless steel 304
06	阀瓣嵌件 Disc insert	1	Brass (H62)
07	指示杆（内外嵌件）Indicator stem (Internal and external insert)	1	PP
08	盖板 Cover	1	PP
09	卡簧 Jump ring	1	Spring steel
10	手轮 Handwheel	1	PP+GF30/PA6+GF30
11	阀体螺帽 Body nut	1	PA6+GF30
12	阀杆 Stem	1	Stainless steel 304
13	销钉 pins	1	Stainless steel 304
14	阀杆螺母嵌件 Stem screw insert	1	Brass (H62)
15	阀杆螺母 Stem screw	1	PPS
16	阀瓣 Disc	1	PPS
17	一体法兰 One Piece Flange	2	PVC-U/C
18	透明罩（DN65-DN150）Transparent cover	1	PC
19	手轮（DN65-DN150）Handwheel	1	PA6+GF30
20	法兰式阀体 Flanged body	1	PVC-U/C

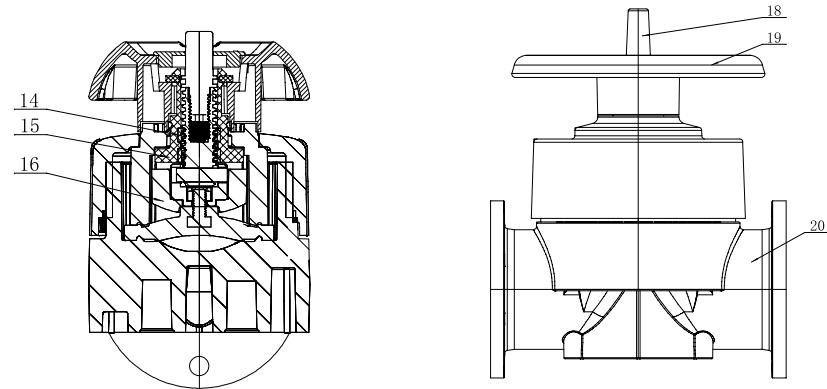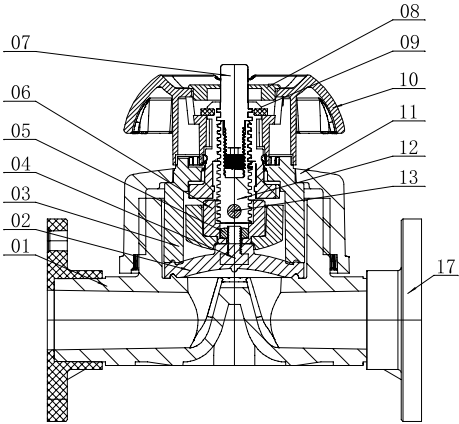

PVC-U/C
 SOCKET DIAPHRAGM VALVE
 插口式隔膜阀，PVC-U/C（国标，美标）

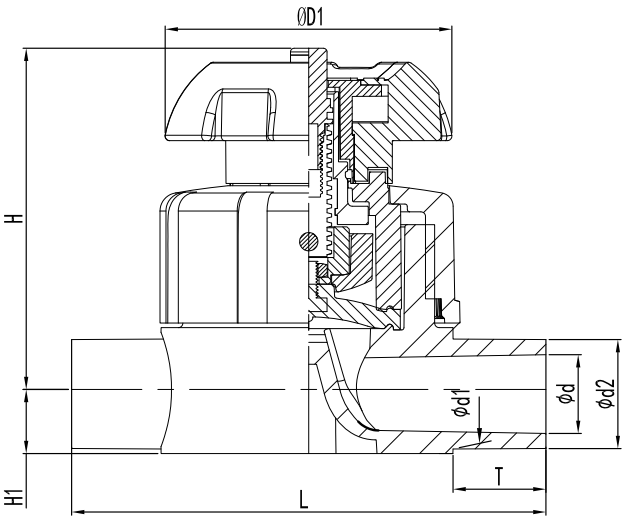

产品介绍

阀门描述
 Valve Description

1. 材质：PVC -U/C
Material: PVC -U/C
2. 尺寸：DN15-50 1/ 2" -2"
Size: DN15-50 1/ 2" -2"
3. 标准：国标，美标
Standard: DIN,ASTM,GB/T4219.2
4. 连接：插口
Connection: socket
5. 颜色：本体灰色，阀盖黄色，手柄黑色
Color: Body-dark gray Valve Cover-yellow, Handwheel-black

产品特性
 Product Features

1. 开关扭力小
Small switch torque
2. 部件可更换，简单经济
Replaceable parts, compact and economical
3. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
4. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
5. 阀门出厂 100% 压力测试
100% pressure test before delivery
6. 本体和密封经过特殊处理，性能更好
Body and sealing parts are specially treated for better performance

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions (mm)							
	D1	d1	d2	d	H1	H	T	L
15(20)	65.00	20.30	19.95	15	14.00	90.00	16.50	124.00
20(25)	65.00	25.30	24.95	20	18.00	102.00	19.00	144.00
25(32)	93.50	32.30	31.90	25	21.00	119.00	22.50	154.00
32(40)	93.50	40.35	39.90	32	26.00	126.00	26.50	174.00
40(50)	121.00	50.35	49.90	40	33.00	139.00	31.50	194.00
50(63)	121.00	63.40	62.90	50	39.00	172.00	36.70	234.00

产品参数（美标 SCH80）


SPECIFICATIONS (ASTM SCH80)

尺寸 Size (*")	外形尺寸 Dimensions (mm)							
	D1	d1	d2	d	H1	H	T	L
1/2"	65.00	21.54	21.23	15	14.00	90.00	23.22	124.00
3/4"	65.00	26.87	26.57	20	18.00	102.00	26.40	144.00
1"	93.50	33.66	33.27	25	21.00	119.00	29.57	154.00
1-1/4"	93.50	42.42	42.04	32	26.00	126.00	32.75	174.00
1-1/2"	121.00	48.56	48.11	40	33.00	139.00	35.93	194.00
2"	121.00	60.63	60.17	50	39.00	172.00	39.10	234.00

配件明细

PARTS LIST


序号 NO.	名称 Name	数量 Quantity	材料 Material
01	阀体（国标）Body(GB/T 4219.2)	1	PVC-U/C
02	隔膜片 Diaphragm	1	EPDM/FPM
03	隔膜片封水套 Diaphragm water seal sleeve	1	PP+GF30
04	六角螺栓 Hex bolt	1	Stainless steel 304
05	六角螺母 Hex nut	1	Stainless steel 304
06	阀瓣嵌件 Disc insert	1	Brass (H62)
07	指示杆（内外嵌件）Indicator stem (Internal and external insert)	1	PP
08	透明罩	1	PC
09	手轮 Handwheel	1	PP
10	阀杆螺母 Stem screw	1	PPS
11	阀杆螺母嵌件 Stem screw insert	1	Brass (H62)
12	阀杆 Stem	1	Stainless steel 304
13	销钉 pins	1	Stainless steel 304
14	阀体螺帽 Body nut	1	PP
15	阀瓣 Disc	1	PPS

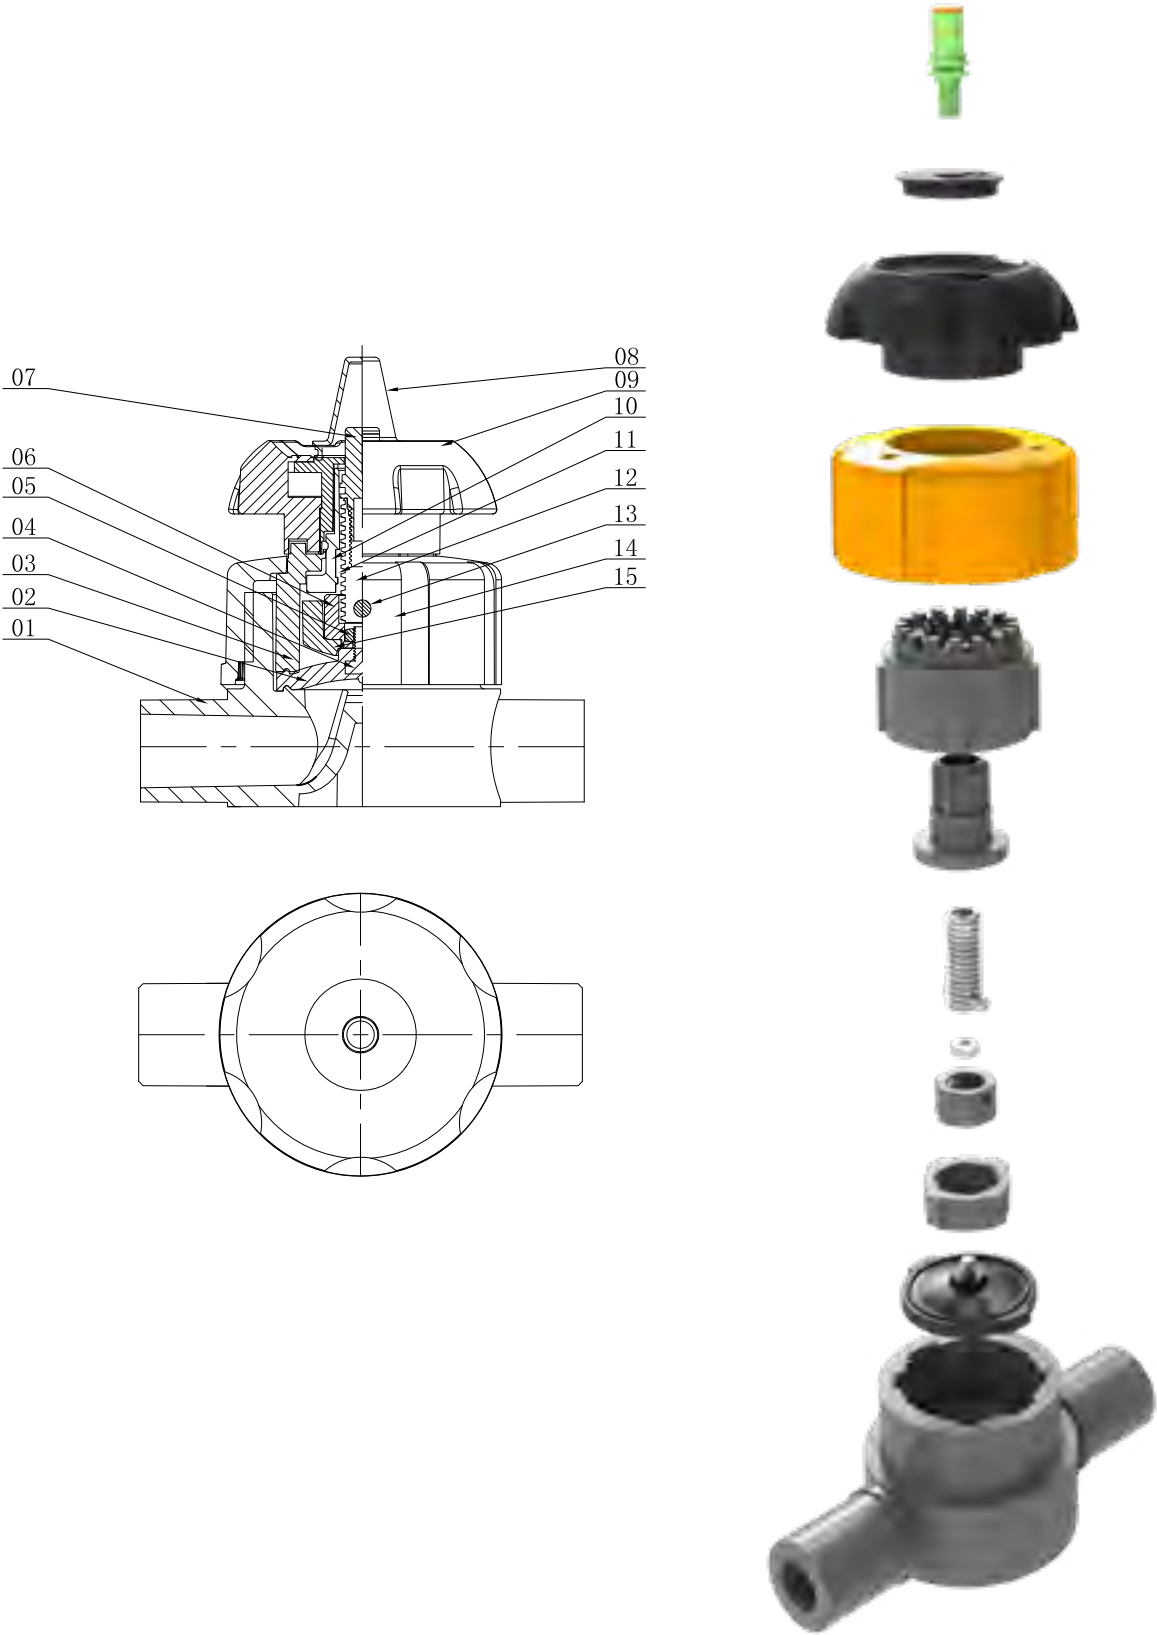

PVC-U/C

TRUE UNION DIAPHRAGM VALVE

由令式插口隔膜阀，PVC-U/C（国标，美标，日标）

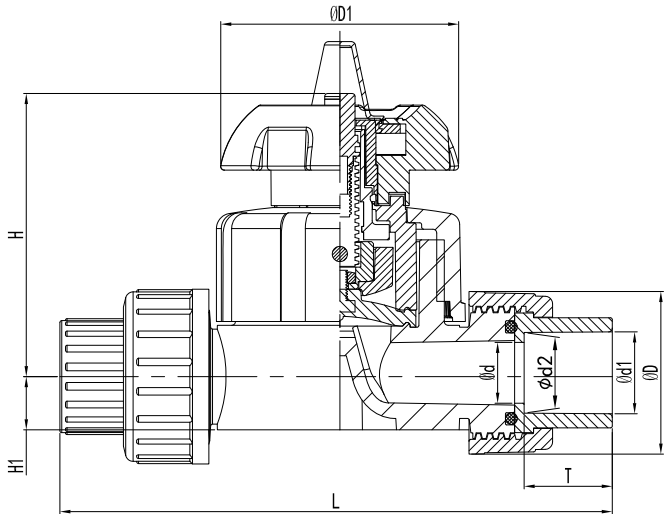

产品介绍

阀门描述

Valve Description

1. 材质：PVC -U/C
Material: PVC -U/C
2. 尺寸：DN15-50 1/ 2" -2" 16A-50A
Size: DN15-50 1/ 2" -2" 16A-50A
3. 标准：国标，美标，日标
Standard: DIN,ASTM,GB/T4219.2
4. 连接：插口
Connection: socket
5. 颜色：本体灰色，阀盖黄色，手柄黑色
Color: Body-dark gray Valve Cover-yellow, Handwheel-black

产品特性

Product Features

1. 开关扭力小
Small switch torque
2. 部件可更换，简单经济
Replaceable parts, compact and economical
3. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
4. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
5. 阀门出厂 100% 压力测试
100% pressure test before delivery

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）								
	D	D1	d1	d2	d	H1	H	T	L
15(20)	46.50	65.00	20.30	19.95	16.00	14.00	90.00	16.50	148.70
20(25)	53.50	65.00	25.30	24.95	20.00	18.00	102.00	19.00	179.30
25(32)	64.00	93.50	32.30	31.90	26.00	21.00	119.00	22.50	189.60
32(40)	74.50	93.50	40.35	39.90	34.00	26.00	126.00	26.50	215.30
40(50)	85.00	121.00	50.35	49.90	43.00	33.00	139.00	31.50	242.50
50(63)	100.00	121.00	63.40	62.90	56.00	39.00	172.00	36.70	281.10

产品参数（美标 SCH80）

SPECIFICATIONS (ASTM SCH80)

尺寸 Size (*")	外形尺寸 Dimensions（mm）								
	D	D1	d1	d2	d	H1	H	T	L
1/2"	46.50	65.00	21.54	21.23	16.00	14.00	90.00	23.22	141.00
3/4"	53.50	65.00	26.87	26.57	20.00	18.00	102.00	26.40	166.80
1"	64.00	93.50	33.66	33.27	26.00	21.00	119.00	29.57	180.00
1-1/4"	74.50	93.50	42.42	42.04	34.00	26.00	126.00	32.75	204.00
1-1/2"	85.00	121.00	48.56	48.11	43.00	33.00	139.00	35.93	231.00
2"	100.00	121.00	60.63	60.17	56.00	39.00	172.00	39.10	272.00


产品参数（日标）

SPECIFICATONS (JIS)


尺寸 Size (*")	外形尺寸 Dimensions（mm）								
	D0	D1	d1	d2	d	H1	H	T	L
16	46.50	65.00	22.40	21.60	16.00	14.00	90.00	30.00	161.60
20	53.50	65.00	26.45	25.51	20.00	18.00	102.00	35.00	195.20
25	64.00	93.50	32.66	31.50	26.00	21.00	119.00	40.00	209.80
30	74.50	93.50	38.60	37.43	34.00	26.00	126.00	44.00	237.60
40	85.00	121.00	48.85	47.38	43.00	33.00	139.00	55.00	280.00
50	100.00	121.00	61.00	59.27	56.00	39.00	172.00	63.00	328.00

配件明细 PARTS LIST

序号 NO.	名称 Name	数量 Quantity	材料 Material
01	承口螺帽 Faucet nut	2	PVC-U/C
02	O 型圈 O-ring	2	EPDM/FPM
03	承口（国标）Faucet(GB/T 4219.2)	2	PVC-U/C
04	阀体（国标）Body(GB/T 4219.2)	1	PVC-U/C
05	隔膜片 Diaphragm	1	EPDM/FPM
06	隔膜片封水套 Diaphragm water seal sleeve	1	PP+GF30
07	六角螺栓 Hex bolt	1	Stainless steel 304
08	六角螺母 Hex nut	1	Stainless steel 304
09	阀瓣嵌件 Disc insert	1	Brass (H62)
10	指示杆（内外嵌件）Indicator stem (Internal and external insert)	1	PP
11	透明罩 Transparent cover	1	PC
12	手轮 Handwheel	1	PP
13	阀杆螺母 Stem screw	1	PPS
14	阀杆螺母嵌件 Stem screw insert	1	Brass (H62)
15	阀杆 Valve stem	1	Stainless steel 304
16	销钉 pins	1	Stainless steel 304
17	阀体螺帽 Valve body nut	2	PP
18	阀瓣 Disc	1	PPS

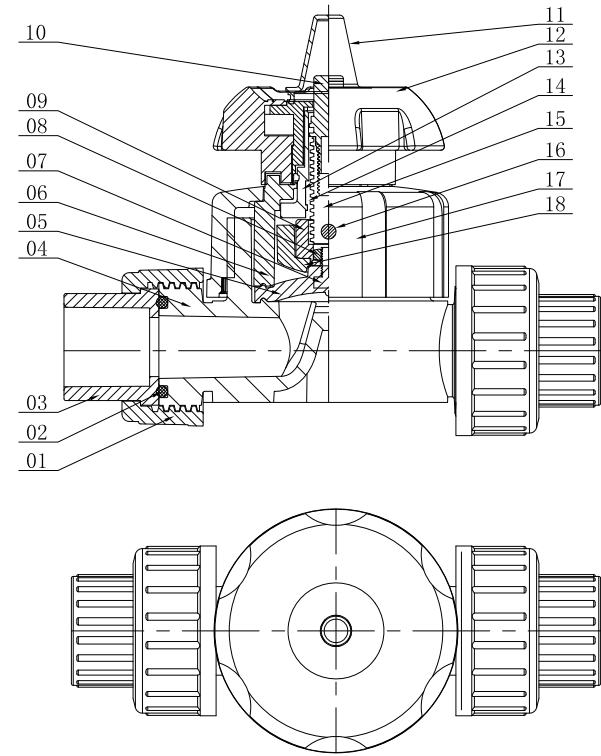

PVC-U/C
 SOCKET TRUE UNION CHECK VALVE
 插口式双由令止回阀，PVC-U/C（国标，美标，日标）

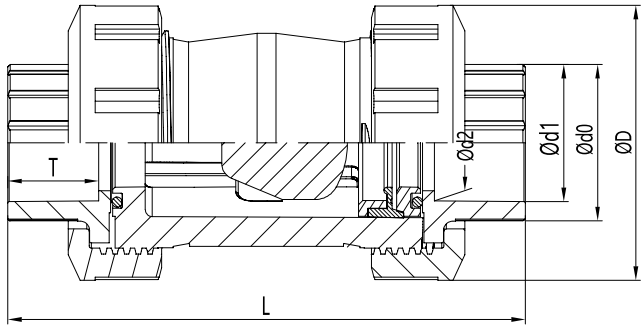

产品介绍

阀门描述
 Valve Description

1. 材质：PVC -U/C
Material: PVC -U/C
2. 尺寸：DN15-100 1/ 2" -4" 16A-100A
Size: DN15-100 1/ 2" -4" 16A-100A
3. 标准：国标，美标，日标
Standard: DIN,ASTM,GB/T4219.2
4. 连接：插口
Connection: socket
5. 颜色：深灰
Color: dark gray

产品特性
 Product Features

1. 部件可更换，简单经济
Replaceable parts, compact and economical
2. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
3. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
4. 阀门出厂 100% 压力测试
100% pressure test before delivery
5. 本体和密封经过特殊处理，性能更好
Body and sealing parts are specially treated for better performance

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）					
	D	d0	d1	d2	T	L
15(20)	51.50	27.40	20.30	19.95	17.00	95.80
20(25)	59.00	32.70	25.30	24.95	19.50	109.60
25(32)	70.00	41.30	32.30	31.90	23.00	123.10
32(40)	85.40	49.60	40.35	39.90	27.00	150.00
40(50)	98.90	60.20	50.35	49.90	32.00	161.20
50(63)	122.20	76.00	63.40	62.90	38.50	186.00
65(75)	158.60	89.60	75.40	74.90	44.50	236.00
80(90)	192.10	105.40	90.50	89.90	52.00	255.00
100(110)	223.60	128.40	110.60	109.90	62.00	298.60

产品参数（美标 SCH80）

SPECIFICATIONS (ASTM SCH80)

尺寸 Size (*)	外形尺寸 Dimensions（mm）					
	D	d0	d1	d2	T	L
1/2"	51.50	27.40	21.54	21.23	23.30	108.40
3/4"	59.00	32.70	26.87	26.57	26.50	123.60
1"	70.00	41.30	33.66	33.27	29.70	136.50
1-1/4"	85.40	49.60	42.42	42.04	32.90	161.80
1-1/2"	98.90	60.20	48.56	48.11	36.10	169.40
2"	122.20	76.00	60.63	60.17	39.30	187.60
2-1/2"	158.60	89.60	73.38	72.85	45.70	237.20
3"	192.10	105.40	89.31	88.70	48.90	248.80
4"	223.60	128.40	114.76	114.07	58.40	291.40

产品参数（日标）


SPECIFICATONS (JIS)

尺寸 Size A	外形尺寸 Dimensions（mm）					
	D	d0	d1	d2	T	L
16	51.50	30.50	22.40	21.60	30.00	121.80
20	59.00	34.11	26.45	25.51	35.00	140.60
25	70.00	41.30	32.66	31.50	40.00	157.10
30	85.40	48.16	38.60	37.43	44.00	184.00
40	98.90	59.10	48.85	47.38	55.00	207.20
50	122.20	72.10	61.00	59.27	63.00	235.00
65	158.60	89.23	77.10	75.73	63.00	273.00
75	192.10	105.33	89.60	88.58	64.00	279.00
100	223.60	133.07	114.70	113.55	84.00	342.60

配件明细

PARTS LIST


序号 NO.	名称 Name	数量 Quantity	材料 Material
01	承口 Faucet	2	PVC-U/C
02	螺帽 Nut	2	PVC-U/C
03	阀体 Body	1	PVC-U/C
04	垫圈 Washer	1	PVC-U/C
05	橡胶圈 Rubber ring	1	EPDM/FPM
06	定位圈 Located Ring	1	PVC-U/C
07	球心 Ball	1	PVC-U/C
08	O 型圈 O-Ring	2	EPDM/FPM

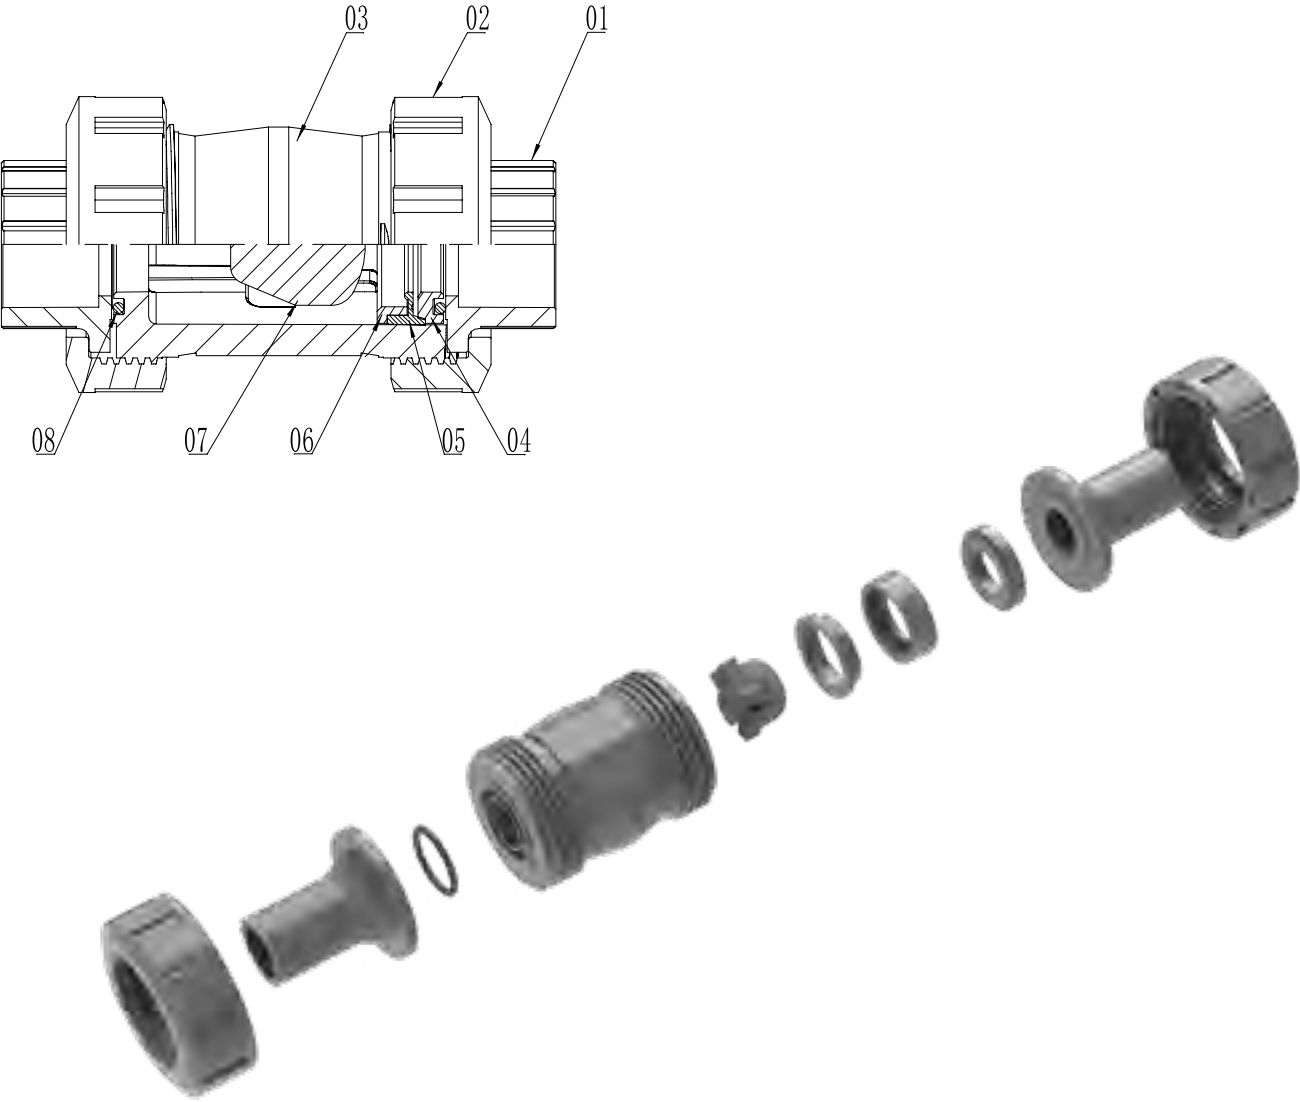

PVC-U/C

THREADED TRUE UNION CHECK VALVE

丝口式双由令止回阀，PVC-U/C（国标，美标，日标）

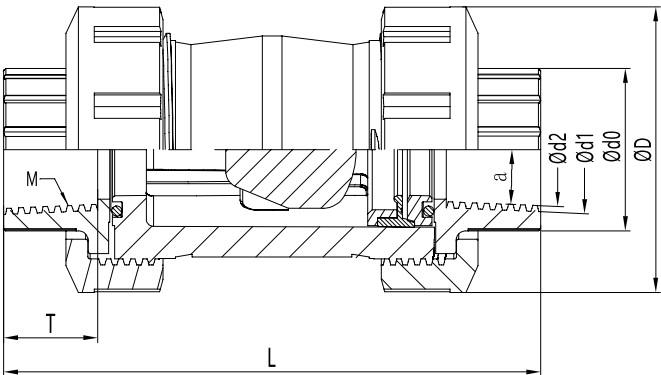

产品介绍

阀门描述
Valve Description

1. 材质：PVC -U/C
Material: PVC -U/C
2. 尺寸：DN15-100 1/ 2" -4" 16A-100A
Size: DN15-100 1/ 2" -4" 16A-100A
3. 标准：国标，美标，日标
Standard: DIN,ASTM,GB/T4219.2
4. 连接：丝口
Connection: Threaded connection
5. 颜色：深灰
Color: dark gray

产品特性
Product Features

1. 部件可更换，简单经济
Replaceable parts, compact and economical
2. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
3. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
4. 阀门出厂 100% 压力测试
100% pressure test before delivery
5. 本体和密封经过特殊处理，性能更好
Body and sealing parts are specially treated for better performance

产品参数（国标 GB/T 4219.2） SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions（mm）						
	D	d0	d1	d2	T	L	Tr 螺纹 PT
15(20)	51.50	27.40	20.95	18.63	17.00	95.80	1/2"
20(25)	59.00	32.70	26.44	24.12	19.50	109.58	3/4"
25(32)	70.00	41.30	33.25	30.29	23.00	123.10	1"
32(40)	85.40	49.60	41.91	38.95	27.00	147.50	1-1/4"
40(50)	98.90	60.20	47.80	44.85	32.00	159.50	1-1/2"
50(63)	122.20	76.00	59.61	56.66	38.50	184.80	2"
65(75)	158.60	89.60	75.18	74.23	44.50	233.50	2-1/2"
80(90)	192.10	105.40	87.88	84.93	52.00	255.00	3"
100(110)	223.60	128.40	113.03	110.07	62.00	297.50	4"

产品参数（美标 SCH80） SPECIFICATIONS (ASTM SCH80)


尺寸 Size（*）	外形尺寸 Dimensions（mm）						
	D	d0	d1	d2	T	L	Tr 螺纹 NPT
1/2"	51.50	27.40	20.95	18.63	17.00	95.80	1/2"
3/4"	59.00	32.70	26.44	24.12	19.50	109.58	3/4"
1"	70.00	41.30	33.25	30.29	23.00	123.10	1"
1-1/4"	85.40	49.60	41.91	38.95	27.00	147.50	1-1/4"
1-1/2"	98.90	60.20	47.80	44.85	32.00	159.50	1-1/2"
2"	122.20	76.00	59.61	56.66	38.50	184.80	2"
2-1/2"	158.60	89.60	75.18	74.23	44.50	233.50	2-1/2"
3"	192.10	105.40	87.88	84.93	52.00	255.00	3"
4"	223.60	128.40	113.03	110.07	62.00	297.50	4"

产品参数（日标） SPECIFICATONS (JIS)


尺寸 Size A	外形尺寸 Dimensions（mm）						
	D	d0	d1	d2	T	L	Tr 螺纹 PT
16	51.50	27.40	20.95	18.63	17.00	95.80	1/2"
20	59.00	32.70	26.44	24.12	19.50	109.58	3/4"
25	70.00	41.30	33.25	30.29	23.00	123.10	1"
30	85.40	49.60	41.91	38.95	27.00	147.50	1-1/4"
40	98.90	60.20	47.80	44.85	32.00	159.50	1-1/2"
50	122.20	76.00	59.61	56.66	38.50	184.80	2"
65	158.60	89.60	75.18	74.23	44.50	233.50	2-1/2"
75	192.10	105.40	87.88	84.93	52.00	255.00	3"
100	223.60	128.40	113.03	110.07	62.00	297.50	4"

配件明细 PARTS LIST

序号 NO.	名称 Name	数量 Quantity	材料 Material
01	承口 Faucet	2	PVC-U/C
02	螺帽 Nut	2	PVC-U/C
03	阀体 Body	1	PVC-U/C
04	垫圈 Washer	1	PVC-U/C
05	橡胶圈 Rubber ring	1	EPDM/FPM
06	定位圈 Located Ring	1	PVC-U/C
07	球心 Ball	1	PVC-U/C
08	O 型圈 O-Ring	2	EPDM/FPM

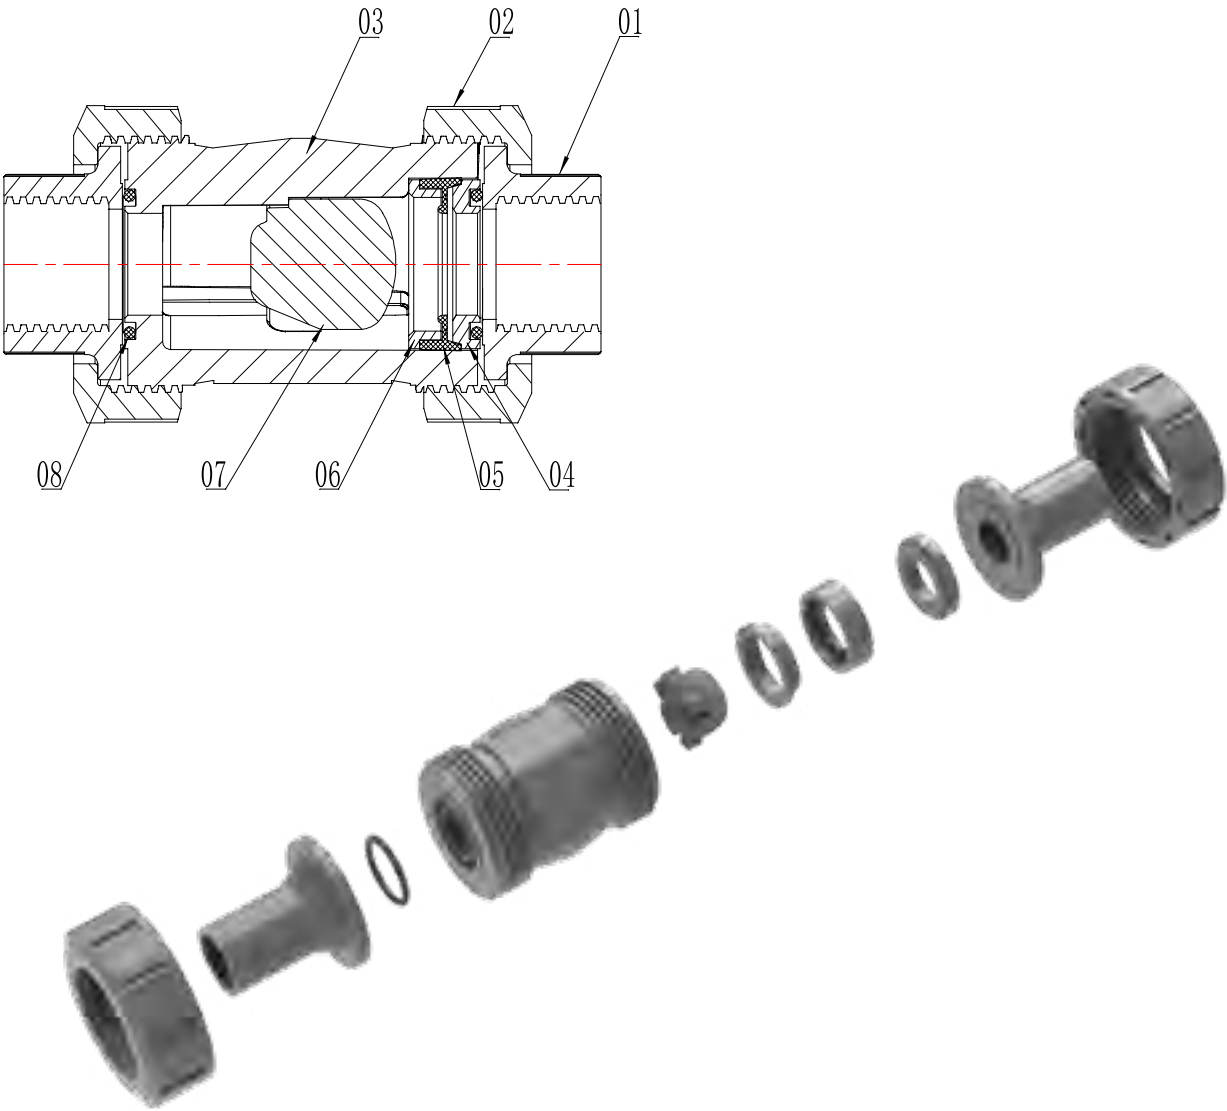

PVC-U/C
FLANG TRUE UNION CHECK VALVE
法兰式双由令止回阀，PVC-U/C（国标）

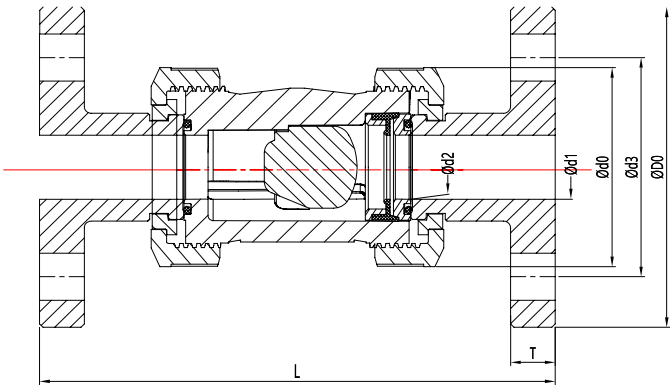

产品介绍

阀门描述
Valve Description

- 1. 材质：PVC -U/C
Material: PVC -U/C
- 2. 尺寸：DN15-100
Size: DN15-100
- 3. 标准：国标
Standard: DIN,ASTM,GB/T4219.2
- 4. 连接：法兰式
Connection: Flanged connection
- 5. 颜色：深灰
Color: dark gray

产品特性
Product Features


- 1. 部件可更换，简单经济
Replaceable parts, compact and economical
- 2. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
- 3. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
- 4. 阀门出厂 100% 压力测试
100% pressure test before delivery
- 5. 本体和密封经过特殊处理，性能更好
Body and sealing parts are specially treated for better performance

产品参数（国标 GB/T 4219.2） SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN(De)	外形尺寸 Dimensions (mm)									
	D0	d0	d1	d2	d3	T	L	法兰中心距 Center distance	法兰孔径 Diameter	法兰孔数量 Number of holes
15(20)	95.00	51.50	20.30	19.95	65.00	13.00	143.00	65.00	14.00	4
20(25)	105.00	59.00	25.30	24.95	75.00	14.00	172.00	75.00	14.00	4
25(32)	115.00	70.00	32.30	31.90	85.00	15.00	187.00	85.00	14.00	4
32(40)	140.00	85.40	40.35	39.90	100.00	15.00	190.00	100.00	16.00	4
40(50)	150.00	98.90	50.35	49.90	110.00	17.00	212.00	110.00	16.00	4
50(63)	165.00	122.20	63.40	62.90	125.00	17.00	234.00	125.00	19.00	4
65(75)	185.00	158.60	75.40	74.90	145.00	18.00	290.00	145.00	19.00	4
80(90)	200.00	192.10	90.50	89.90	160.00	18.00	310.00	160.00	19.00	8
100(110)	220.00	223.60	110.60	109.90	180.00	18.00	372.00	180.00	19.00	8

配件明细 PARTS LIST

序号 NO.	名称 Name	数量 Quantity	材料 Material
01	法兰头 Flange	2	PVC-U/PVC-C
02	螺帽 Nut	2	PVC-U/PVC-C
03	阀体 Body	1	PVC-U/PVC-C
04	固定卡环 Clamp Ring	2	PVC-U/PVC-C
05	垫圈 Washer	1	PVC-U/PVC-C
06	橡胶圈 Rubber Ring	1	EPDM/FPM
07	定位圈 Located Ring	1	PVC-U/PVC-C
08	球芯 Ball	1	PVC-U/PVC-C
09	O 型圈 O-ring	2	EPDM/FPM

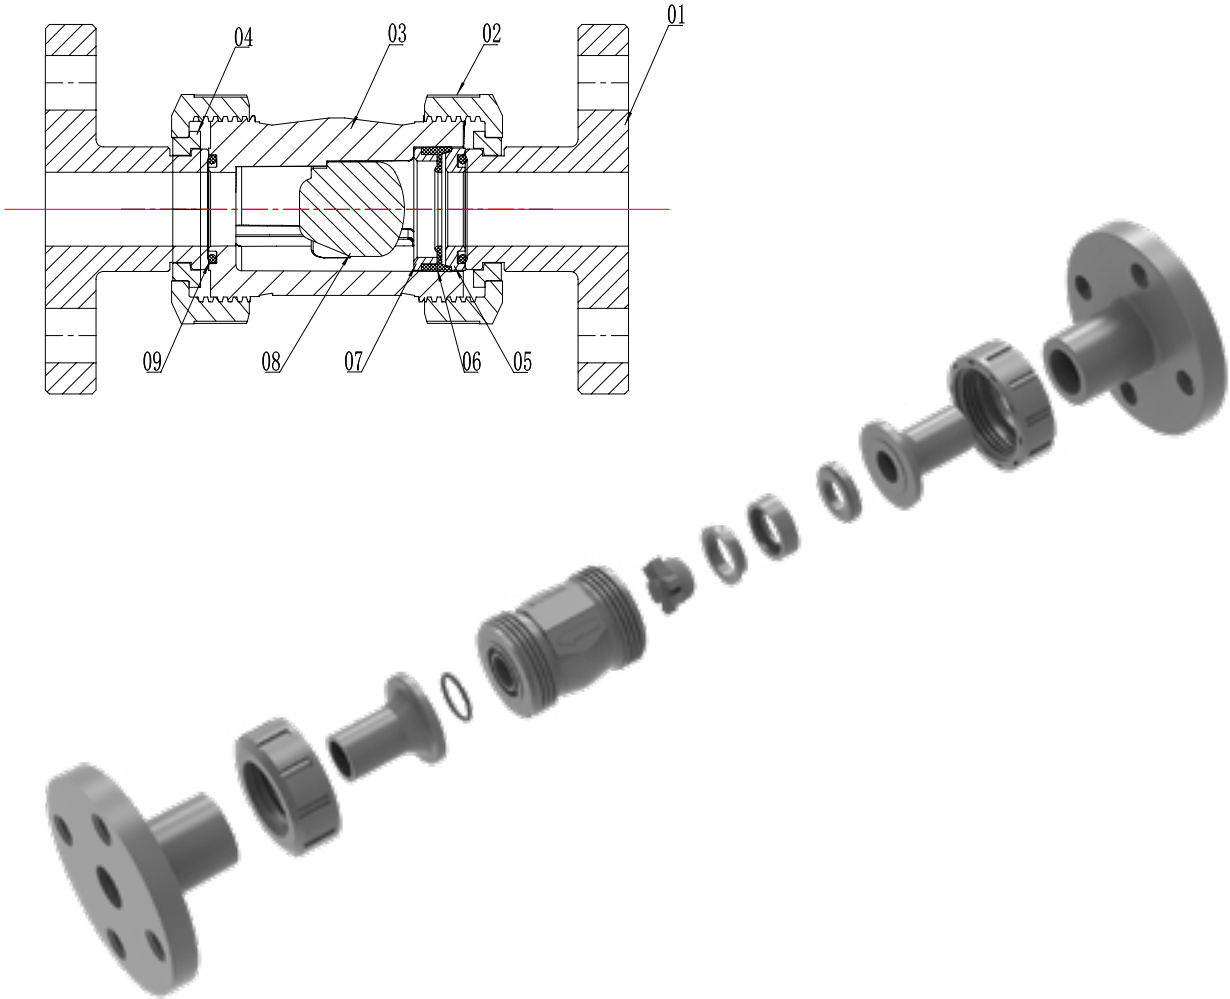

EXPERT IN PIPING SYSTEM


管路系统专家级



PVC-U/C

SWING CHECK VALVE TOP-HINGED TYPE

旋启式止回阀，PVC-U/C（国标，美标，日标）

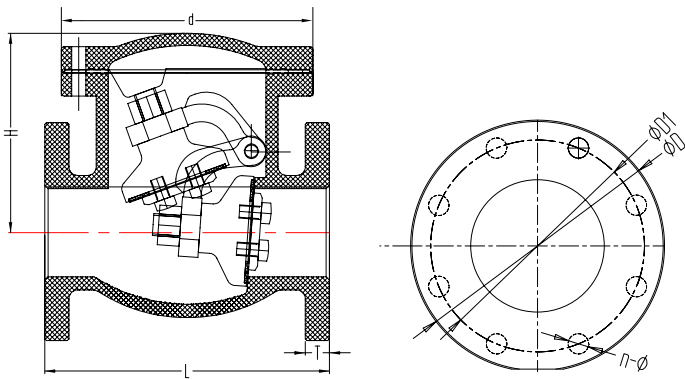

产品介绍

阀门描述

Valve Description

1. 材质：PVC -U/C
Material: PVC -U/C
2. 尺寸：DN15-200 1/ 2" -8" 16A-200A
Size: DN15-200 1/ 2" -8" 16A-200A
3. 标准：国标，美标，日标
Standard: DIN,ASTM,JIS,GB/T4219.2
4. 连接：法兰
Connection: Flanged connection
5. 颜色：深灰
Color: dark gray

产品特性

Product Features

1. 部件可更换，简单经济
Replaceable parts, compact and economical
2. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
3. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
4. 阀门出厂 100% 压力测试
100% pressure test before delivery
5. 本体和密封经过特殊处理，性能更好
Body and sealing parts are specially treated for better performance

产品参数（国标 GB/T 4219.2）

SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size DN	外形尺寸 Dimensions（mm）						
	D	D1	L	T	H	d	n-Φe
15	100	65	140	15	93	87	4-Φ14
20	100	75	140	15	93	87	4-Φ14
25	120	85	160	15	117	130	4-Φ18
32	140	100	180	19	137	146	4-Φ18
40	140	110	180	19	137	146	4-Φ18
50	165	125	200	20	156	167	4-Φ18
65	185	145	240	22	170.2	203	4-Φ18
80	200	160	260	22	181	230	8-Φ18
100	224	180	300	24	216	278	8-Φ18
125	254	210	300	24	216	278	8-Φ18
150	285	240	400	26	286	394	8-Φ23
200	324	295	500	30	336	476	8-Φ23

产品参数（美标 SCH80）

SPECIFICATIONS (ASTM SCH80)

尺寸 Size (*")	外形尺寸 Dimensions（mm）						
	D	D1	L	T	H	d	n-Φe
1/2"	100	60	140	15	93	87	4-Φ16
3/4"	100	70	140	15	93	87	4-Φ16
1"	120	79	160	15	117	130	4-Φ16
1-1/4"	140	88.9	180	19	137	146	4-Φ16
1-1/2"	140	98	180	19	137	146	4-Φ16
2"	165	121	200	20	156	167	4-Φ19
2-1/2"	185	140	240	22	170.2	203	4-Φ19
3"	200	152	260	22	181	230	4-Φ19
4"	224	191	300	24	216	278	8-Φ19
5"	254	216	300	24	216	278	8-Φ22
6"	285	241	400	26	286	394	8-Φ22
8"	324	298	500	30	336	476	8-Φ22


产品参数（日标）

SPECIFICATONS (JIS)

尺寸 Size A	外形尺寸 Dimensions（mm）						
	D	D1	L	T	H	d	n-Φe
16	100	70.00	140	15	93	87	4-Φ15
20	100	75.00	140	15	93	87	4-Φ15
25	120	90.00	160	15	117	130	4-Φ19
30	140	100.00	180	19	137	146	4-Φ19
40	140	105.00	180	19	137	146	4-Φ19
50	165	120.00	200	20	156	167	4-Φ19
65	185	140.00	240	22	170.2	203	4-Φ19
75	200	150.00	260	22	181	230	8-Φ19
100	224	175.00	300	24	216	278	8-Φ19
125	254	210.00	300	24	216	278	8-Φ23
150	285	240.00	400	26	286	394	8-Φ23
200	343	290.00	500	30	336	476	12-Φ23


配件明细 PARTS LIST

序号 NO.	名称 Name	数量 Quantity	材料 Material
01	端盖 End Cover	1	PVC-U/C
02	垫片 1 Gasket 1	1	EPDM/FPM
03	阀体 Body	1	PVC-U/C
04	铰链 Hinge	1	PVC-U/C
05	销钉 Pin	1	PTFE
06	六角螺栓 Hexagon Bolt	1—4	PVC-U/C
07	盖板 Coverplate	1	PVC-U/C
08	垫片 2 Gasket 2	1	EPDM/FPM
09	活板 Flap	1	PVC-U/C
10	螺帽 Nut	1	PVC-U/C
11	六角螺帽 Hexagon Nut	8—12	Stainless steel 304
12	弹垫 Spring Washer	8—12	Stainless steel 304
13	平垫 Plain Washer	16—24	Stainless steel 304
14	六角螺栓 Hexagon Bolt	8—12	Stainless steel 304

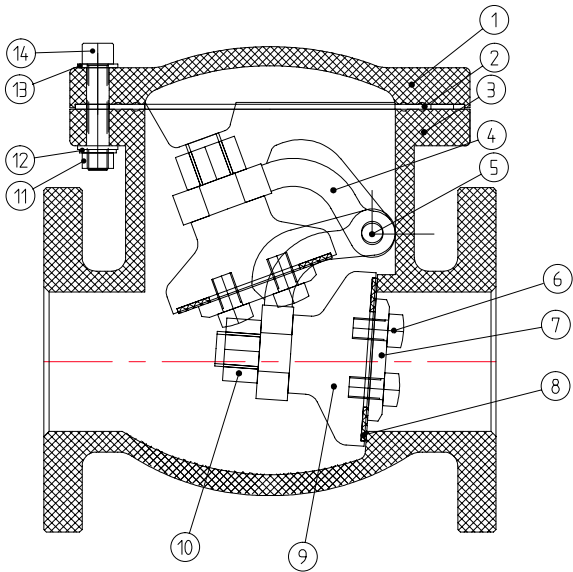

PVC-U/C
SINGLE UNION CHECK VALVE

单由令止回阀，PVC-U/C（国标）

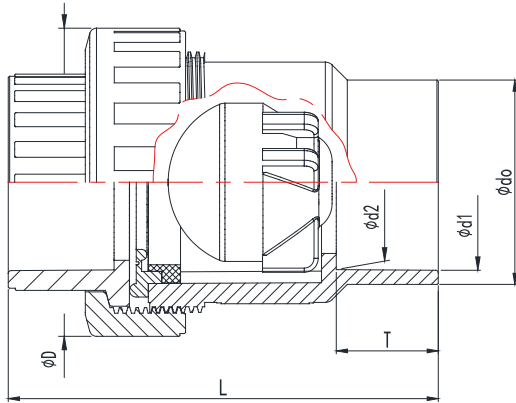

产品介绍

阀门描述
Valve Description

1. 材质：PVC-U/C
Material: PVC-U/C

2. 尺寸：DN15-100
Size: DN15-100

3. 标准：国标
Standard: DIN,ISO,GB/T4219.2

4. 连接：插口
Connection: socket

5. 颜色：深灰
Color: dark gray

产品特性
Product Features

1. 实心·内球，止水效果好
Solid inner ball, good water stop effect

2. 部件可更换，简单经济
Parts can be replaced, simple and economical

3. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product

4. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance


5. 阀门出厂 100% 压力测试
100% pressure test before delivery

产品参数（国标 GB/T 4219.2）SPECIFICATIONS (DIN, ISO, GB/T)

尺寸 Size De	外形尺寸 Dimensions (mm)						工作压力 Working pressure PN(kg/cm²)	最低开启压力 Minimum opening pressure PN(kg/cm²)
	D	d0	d1	d2	T	L		
15(20)	47.00	26.90	20.30	19.95	16.50	77.50	10	0.15~0.3
20(25)	53.90	32.50	25.30	24.95	19.00	94.50	10	0.15~0.3
25(32)	67.00	40.30	32.30	31.90	22.50	111.00	10	0.15~0.3
32(40)	78.50	49.40	40.35	39.90	26.50	129.00	10	0.15~0.3
40(50)	93.20	61.60	50.35	49.90	31.50	143.00	10	0.15~0.3
50(63)	110.60	73.40	63.40	62.90	36.70	154.70	10	0.15~0.3
65(75)	130.60	89.60	75.40	74.90	44.00	185.40	10	0.15~0.3
80(90)	148.40	105.50	90.50	89.90	51.50	213.70	10	0.15~0.3
100(110)	173.40	126.50	110.60	109.90	61.50	238.40	10	0.15~0.3


配件明细 PARTS LIST

序号 No.	名称 Name	数量 Quantity	材料 Material
01	承口 Faucet	1	PVC-U/C
02	螺帽 Nut	1	PVC-U/C
03	橡胶圈 Rubber Ring	1	EPDM/FPM
04	定位圈 Located Ring	1	PVC-U/C
05	阀芯 Ball	1	PVC-U/C
06	阀体 Body	1	PVC-U/C

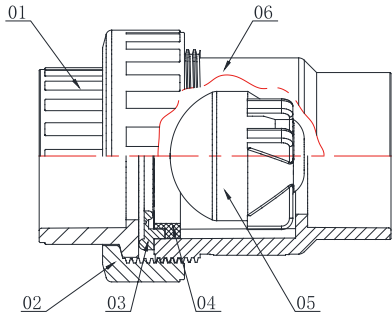

PVC-U/C
SINGLE UNION FOOT VALVE

单由令底阀，PVC-U/C（国标）

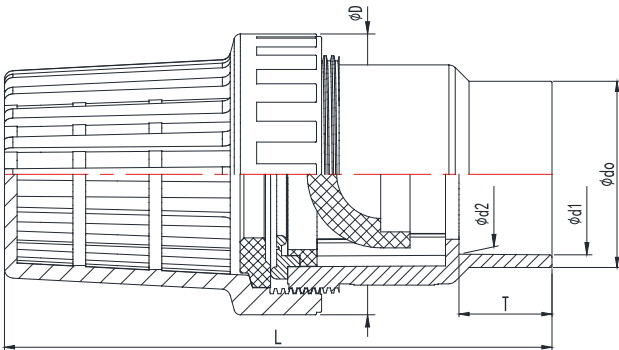

产品介绍

阀门描述
Valve Description

- 1. 材质：PVC-U/C
Material: PVC-U/C
- 2. 尺寸：DN15-50
Size: DN15-50
- 3. 标准：国标
Standard: DIN,ISO,GB/T4219.2
- 4. 连接：插口
Connection: socket
- 5. 颜色：深灰
Color: dark gray

产品特性
Product Features

- 1. 实心·内球，止水效果好
Solid inner ball, good water stop effect
- 2. 部件可更换，简单经济
Parts can be replaced, simple and economical
- 3. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
- 4. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
- 5. 阀门出厂 100% 压力测试
100% pressure test before delivery




产品参数（国标 GB/T 4219.2）SPECIFICATIONS (DIN, ISO, GB/T)


尺寸 Size DN (De)	外形尺寸 Dimensions (mm)						工作压力 Working pressure PN(kg/cm²)	最低开启压力 Minimum opening pressure PN(kg/cm²)
	D	d0	d1	d2	T	L		
15(20)	47.00	27.90	20.30	19.96	16.50	113.00	10	0.15~0.3
20(25)	53.90	32.50	25.30	24.95	19.00	132.40	10	0.15~0.3
25(32)	67.00	40.30	32.30	31.90	22.50	145.70	10	0.15~0.3
32(40)	78.50	49.30	40.35	39.90	26.50	177.40	10	0.15~0.3
40(50)	93.00	61.60	50.35	49.90	31.50	201.60	10	0.15~0.3
50(63)	110.60	74.00	63.40	62.90	36.70	215.80	10	0.15~0.3

配件明细 PARTS LIST

序号 No.	名称 Name	数量 Quantity	材料 Material
01	网罩 Wash Enclosure	1	PVC-U/C
02	垫圈 Washer	1	PVC-U/C
03	胶圈 Ring	1	EPDM/FPM
04	定位圈 Located Ring	1	PVC-U/C
05	阀芯 Ball	1	PVC-U/C
06	阀体 Body	2	PVC-U/C

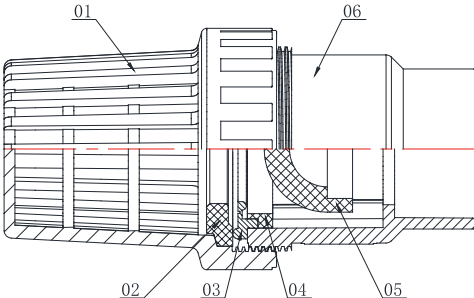

PVC-U/C
SWING FOOT VALVE
摆动式底阀，PVC-U/C（国标）

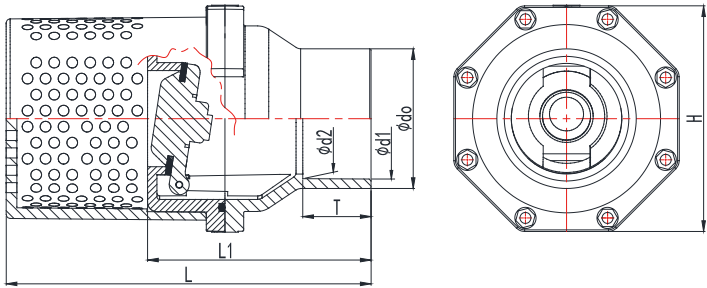

产品介绍

阀门描述
Valve Description

1.

材质：PVC-U/C
Material: PVC-U/C
2.

尺寸：DN65-150
Size: DN65-150
3.

标准：国标
Standard: DIN,ISO,GB/T4219.2
4.

连接：插口
Connection: socket
5.

颜色：深灰
Color: dark gray

产品特性
Product Features

1.

部件可更换，简单经济
Parts can be replaced, simple and economical
2.

材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
3.

阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
4.

阀门出厂 100% 压力测试
100% pressure test before delivery




产品参数（国标 GB/T 4219.2）SPECIFICATIONS (DIN, ISO, GB/T)


尺寸 Size DN (De)	外形尺寸 Dimensions (mm)							工作压力 Working pressure PN(kg/cm²)	最低开启压力 Minimum opening pressure PN(kg/cm²)
	d0	d1	d2	T	L1	L	H		
65(75)	88.20	75.40	74.90	43.70	160.00	266.00	169.00	6	0.15~0.3
80(90)	104.60	90.50	89.90	51.20	167.50	273.50	169.00	6	0.15~0.3
100(110)	125.40	110.60	109.90	61.20	218.00	379.00	206.00	6	0.15~0.3
De125(125)	145.50	125.70	124.90	68.70	215.50	386.50	206.00	6	0.15~0.3
125(140)	164.00	140.75	139.90	76.30	294.80	496.30	285.00	6	0.15~0.3
150(160)	186.00	160.80	159.90	87.00	304.50	505.80	285.00	6	0.15~0.3

配件明细 PARTS LIST

序号 No.	名称 Name	数量 Quantity	材料 Material
01	漏体 Drain Body	1	PVC-U/C
02	阀体 Body	1	PVC-U/C
03	胶圈 1 Ring1	1	EPDM/FPM
04	活板 Trap	1	PVC-U/C
05	固定块 Fixed Block	2	PVC-U/C
06	胶圈 2 Ring2	1	EPDM/FPM
07	阀盖 Cover	1	PVC-U/C
08	螺栓 Bolt	12	Stainless steel
09	螺母 Nut	12	Stainless steel
10	垫片 Gasket	12	Stainless steel

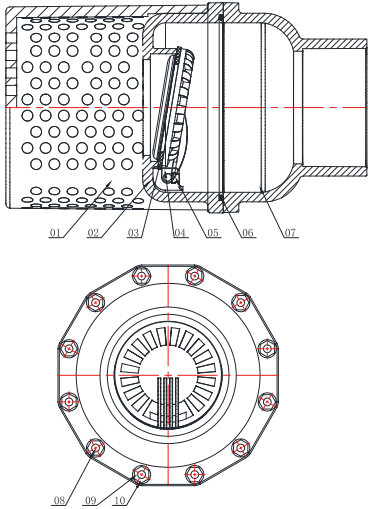

PVC-U/C
SWING CHECK VALVE
摆动式止回阀，PVC-U/C（国标）

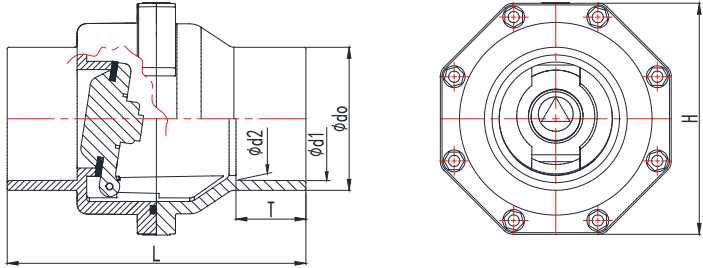

产品介绍

阀门描述
Valve Description

- 1. 材质：PVC-U/C
Material: PVC-U/C
- 2. 尺寸：DN65-150
Size: DN65-150
- 3. 标准：国标
Standard: DIN,ISO,GB/T4219.2
- 4. 连接：插口
Connection: socket
- 5. 颜色：深灰
Color: dark gray

产品特性
Product Features


- 1. 部件可更换，简单经济
Parts can be replaced, simple and economical
- 2. 材料经过纳米改性，提高产品的耐压性及抗冲击性
The material is nano-modified to improve the pressure resistance and impact resistance of the product
- 3. 阀体加厚处理，抗压性能高
Thickened valve body for high compression resistance
- 4. 阀门出厂 100% 压力测试
100% pressure test before delivery

产品参数（国标 GB/T 4219.2） SPECIFICATIONS (DIN, ISO, GB/T)


尺寸 Size DN (De)	外形尺寸 Dimensions (mm)						工作压力 Working pressure PN(kg/cm²)	最低开启压力 Minimum opening pressure PN(kg/cm²)
	d0	d1	d2	T	L	H		
65(75)	88.20	75.40	74.90	43.70	207.10	169.00	6	0.15~0.3
80(90)	104.60	90.50	89.90	51.20	218.70	169.00	6	0.15~0.3
100(110)	125.40	110.60	109.90	61.20	268.00	206.00	6	0.15~0.3
De125(125)	145.50	125.70	124.90	68.70	283.00	206.00	6	0.15~0.3
125(140)	164.00	140.75	139.90	76.30	369.30	285.00	6	0.15~0.3
150(160)	186.00	160.80	159.90	87.00	390.00	285.00	6	0.15~0.3

配件明细 PARTS LIST

序号 No.	名称 Name	数量 Quantity	材料 Material
01	阀体 Body	1	PVC-U/C
02	胶圈 1 Ring1	1	EPDM/FPM
03	活板 Trap	1	PVC-U/C
04	胶圈 2 Ring2	1	EPDM/FPM
05	阀盖 Cover	1	PVC-U/C
06	螺栓 Bolt	8	Stainless steel
07	螺母 Nut	8	Stainless steel
08	垫片 Gasket	8	Stainless steel

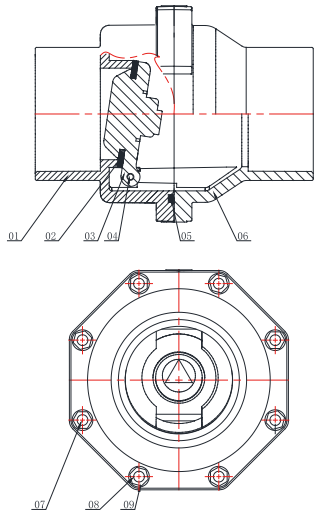

PVC-U/C
SAMPLING VALVE
取样阀，PVC-U/C(国标)

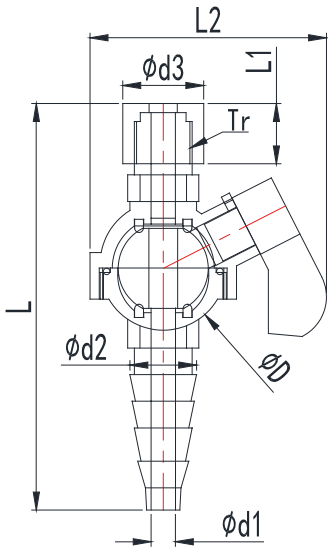


产品参数 SPECIFICATIONS

尺寸 Size (*)	外形尺寸 Dimensions (mm)							
	D	d1	d2	d3	L	L1	L2	Tr
1/4"	28.50	5.50	15.00	20.00	94.00	16.00	53.50	1/4"

配件明细 PARTS LIST

序号 No.	名称 Name	数量 Quantity	材料 Material
01	螺帽 Nut	1	PVC-U/C
02	阀体 Body	1	PVC-U/C
03	胶圈 Ring	1	EPDM/FPM
04	球心 Ball	1	PVC-U/C
05	胶圈 Ring	1	EPDM/FPM
06	胶圈 Ring	1	EPDM/FPM
07	阀嘴 Nozzle	1	PVC-U/C
08	手柄 Lever	1	PVC-U

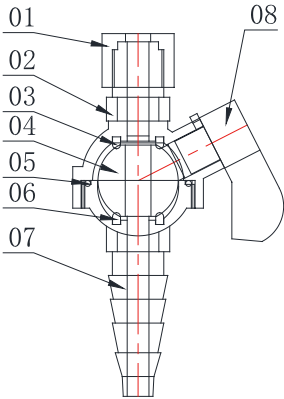

EXPERT IN PIPING SYSTEM
管道系统专家